



Numerics

10BASE2 cables (thin Ethernet cables), 323
 10BASE5 cables (thick Ethernet cables), 323
 10-Gbps Ethernet, 334–335
 10-Mbps Ethernet, 329–330
 80/20 rule, 28
 100BASE-T Ethernet, 331–332
 100-Mbps Ethernet, 331–332
 1000BASE-CX Ethernet, 334
 1000BASE-LX Ethernet, 334
 1000BASE-SX Ethernet, 334
 1000BASE-T Ethernet, 334

A

AARP (AppleTalk Address Resolution Protocol), 190
 ABR (available bit rate), 121–122
 ABRs (area border routers), 249
 absolute usage
 bandwidth, 393
 utilization, 80
 absorption, RF signal problems, 74
 acceptance criteria tests, 407
 access
 data, scalability, 28–29
 layers
 hierarchical topology, 134
 multiple routing protocols, 258
 three-layer hierarchical topology, 143
 points, WLANs, 160–162
 remote. *See* remote access
 security policy, 271
 servers callback, 282
 submodules, campus network topology, 150
 access control lists (ACLs), 277
 access-point hot standby, WLANs, 161
 accountability, security policy, 271. *See also* security
 accounting
 management, 54, 304
 security design, 274

accuracy, 36
 existing networks, 81–83
 performance, 42–43
 acknowledgments (ACKs), 75
 ACKs (acknowledgments), 75
 ACLs (access control lists), 277
 active virtual forwarders (AVFs), 170
 active virtual gateway (AVG), 170
 ACU (Aironet Client Utility), 75
 adaptability
 documenting, 462
 technical goals, 55–56
 adaptive cut-through switching, 225
 add-name queries, 213
 Address Mapping group, RMON2, 310
 Address Resolution Protocol (ARP), 167
 addresses
 existing networks, 67–69
 hierarchical, 197
 benefits, 198
 CIDR (classless interdomain routing), 199
 classless *versus* classful routing, 199–200
 discontiguous subnets, 203–204
 IPv6, 205–209
 route summarization, 201–203
 routing, 198
 VLSM (variable-length subnet masking), 204–205
 IP multicast, 431
 network layers, 186
 administrator assignment, 188
 central authority, 187–188
 dynamic, 188–195
 private IP, 195–197
 structured model, 186–187
 routing. *See* routing
 shortage, 196
 administration
 distances, multiple routing protocols, 260–261
 naming model, 210–211
 network layer addresses
 authority distribution, 188
 central authority, 187–188
 admission control functions, RSVP, 123
 ADSL (Asymmetric Digital Subscriber Line), 98, 372–374

- affordability
 - documenting, 462
 - technical goals, 56–57
- AFP (Apple Filing Protocol), 100
- aggregation (summarization), 201
 - global addresses, 207–208
 - network example, 201–202
 - requirements, 202–203
- Agilent Router Tester, 415
- Aironet Client Utility (ACU), 75
- Alarms group, RMON, 309
- Albitz, Paul, *DNS and BIND*, 216
- algorithms
 - diffusing-update (DUAL), 246
 - Dijkstra, 238
 - encryption, 275
 - RED (random early detection), 453–454
 - spanning-tree, 227
 - BackboneFast, 228–229
 - Loop Guard, 230–231
 - PortFast, 227–228
 - UDLD (Unidirectional Link Detection), 230
 - UplinkFast, 228–229
- ALGs (application-level gateways), 209
- American Registry for Internet Numbers (ARIN), 187
- anycast addresses, IPv6, 206
- API (application programming interface), 209
- APNIC (Asia Pacific Network Information Center), 187
- appendices (design documentation), 468
- Apple Filing Protocol (AFP), 100
- AppleTalk
 - booting, 473–474
 - broadcast traffic, 113
 - dynamic addressing, 189–190
 - routing protocol, 252
 - AURP (AppleTalk Update-Based Routing Protocol), 253–254
 - EIGRP, 254
 - IP migration, 254
 - RTMP (Routing Table Maintenance Protocol), 252–253
 - workstation-to-router redundancy, 166
- AppleTalk Address Resolution Protocol (AARP), 190
- Application Layer Host group, RMON2, 311
- Application Layer Matrix group, RMON2, 311
- application programming interface (API), 209
- application-level gateways (ALGs), 209
- applications
 - business goals, 18–21, 24
 - documenting designs, 463
 - securing user services, 286–287
 - throughput, 40–41
 - traffic load patterns, 107–108
 - protocol usage, 109
 - workstation initialization, 109–110
- architectures
 - existing network cabling, 73–76
 - management, 305–307
- area border routers (ABRs), 249
- Area O, OSPF (Open Shortest Path First), 249
- area-range command, 249
- ARIN (American Registry for Internet Numbers), 187
- ARP (Address Resolution Protocol), 112, 167
- The Art of Computer Systems Performance Analysis*, 403
- The Art of Testing Network Systems*, 403
- Asia Pacific Network Information Center (APNIC), 187
- assets, security, 50–51, 268–269
- Asymmetric Digital Subscriber Loop (ADSL), 98, 372–374
- asymmetric keys, 275
- asynchronous distance learning, 391
- asynchronous routing services, 375
- Asynchronous Transfer Mode. *See* ATM
- ATM, (Asynchronous Transfer Mode), 119, 339
 - LANs technology, 339–340
 - QoS
 - parameters, 340
 - traffic requirements, 119–122
 - Theory and Applications*, 108
 - WANs, 385–387
- attack reconnaissance, 52–53. *See also* security
- attribute bytes, 99
- auditing, security design, 274. *See also* security
- AURP (AppleTalk Update-Based Routing Protocol), 253–254, 262

authentication. *See also* security
 CHAP, 282
 security
 design, 272–273
 policy, 271
 wireless networks, 288–290
 IEEE 802.1X, 291–293
 MAC address, 290–291
 SSID (Service Set Identifier), 290
 authorization, security design, 273. *See also* security
 autoconfiguration, IPv6, 193
 automatic allocation, DHCP IP addressing, 191
 automatic failovers, 146
 autonegotiation, Ethernet networks, 82–83
 autonomous switching, 446
 availability
 documenting, 462
 existing network performance, 77–78
 technical goals, 29–30
 disaster recovery, 30–31
 requirements, 31–35
 testing, 409
 available bit rate (ABR), 121
 AVFs (active virtual forwarders), 170
 AVG (active virtual gateway), 170
 AvgBusy1 variable, 88
 AvgBusy5 variable, 88

B

BackboneFast, 228–229
 backbones
 campus network, 150
 OSPF (Open Shortest Path First), 249
 backdoors, hierarchical topology, 144
 backup paths, redundant topology, 146–147
 Backward explicit congestion notification (BECN), 383
 bandwidths
 cable modems, 371
 capacity, 36
 domains (Ethernet collision domain), 156, 329
 error-recovery mechanisms, 118
 existing network utilization, 80–81
 IGRP (Interior Gateway Routing Protocol), 245
 optimization, IP multicast, 430–435

performance, 36
 QoS requirements, 119
 utilization efficiency, 44
 WANs, 377–378, 393–394
 Klamath Paper Products, 393–394
 window size, 116
 baselines, existing network performance, 77
 Basic Rate Interface ISDN (BRI ISDN), 368
 bastion hosts, 181
 battery-backed-up RAM, 190
 BECN (backward explicit congestion notification), 383
 belt-and-suspenders approach, security, 279. *See also* security
 BER, testing, 81
 Berkowitz, Howard, *WAN Survival Guide*, 174
 best router forwarding algorithm, 166
 best-effort services, QoS, 437
 BGP (Border Gateway Protocol), 97, 200, 251–252, 262
 BGP4 (Border Gateway Protocol, version 4), 280
 bidirectional traffic, peer-to-peer, 101
 bimodal distribution, 84–85
 bit error rate (BER) thresholds, WAN accuracy
 goals, 42
 blocking, STP state, 152
 booting
 AppleTalk, 473–474
 DHCP, 474–475
 NetBIOS, 475–476
 NetWare, 472
 SNA, 477
 TCP/IP, 474
 BOOTP, 191
 Border Gateway Protocol (BGP), 97, 200, 251–252, 262
 Border Gateway Protocol, version 4 (BGP4), 280
 bounded updates, 246
 BPDU (Bridge Protocol Data Unit), 151
 Filtering, 228
 Guard, 228
 Skew Detection, 155
 BRI ISDN (Basic Rate Interface ISDN), 368
 Bridge Protocol Data Unit (BPDU), 151
 Filtering, 228
 Guard, 228
 Skew Detection, 155

- bridged virtual interface (BVI), 261
- bridges, 341
 - LANs devices, 342–344
 - protocol selection, 223
 - spanning-tree algorithm, 227–231
 - transparent bridging, 224–225
 - transparent switching, 225–227
 - VLANs, 231–234
- tables, 224
- broadcasts
 - frames, traffic behavior, 112–113
 - NetBT, 213
 - radiation, 112
 - storms, 112
- Buchanan, Robert, *The Art of Testing Network Systems*, 403
- bucket rates, 125
- bucket sizes, 125
- budgets
 - business constraints (clients), 23–24
 - documenting designs, 467–468
- BufferElMiss variable, 88
- BufferFail variable, 88
- buildings
 - cabling topology, 321–323
 - networks, 18
- burst-mode protocols, 117
- businesses
 - constraints (clients), 24
 - budgets, 23–24
 - policies, 21–23
 - staffing, 23–24
 - goals (clients), 10
 - documenting designs, 461–462
 - enterprise networks, 12–15
 - exploratory research, 10–12
 - identifying applications, 18–21, 24
 - LANs design example, 345–346
 - scope of project, 16–18
 - typical business goals, 16
 - timeframes, 24
- BusyPer variable, 88
- buying transit, 179
- BVI (bridged virtual interface), 261

C

- C2 auditing, security logs, 304
- Cable Modem Termination System (CMTS), 371
- cable modems, 363, 370–372
- cabling
 - Ethernet, 329
 - existing networks, 70–76
 - LANs (local area networks), 320
 - topology, 320–323
 - types, 323–325
- cache engines, 100
- call control layer, 103
- callbacks, remote access, 282
- CAM tables (Content Addressable Memory tables), 224
- camel-back distribution, 84
- campus LANs, 18, 56, 150, 319
 - backbones, 150
 - cabling, 320
 - topology, 320–323
 - types, 323–325
 - design example
 - background information, 345
 - business goals, 345–346
 - current network, 349–355
 - data stores, 349
 - network applications, 347
 - redesign, 355–359
 - technical goals, 346
 - user communities, 347–348
- devices, 341–344
- Enterprise Composite Network Model, 148
- redundant LANs, 162–163
- server redundancy, 163–165
- STP (Spanning Tree Protocol), 151
 - convergence, 151–153
 - root bridge, 153–154
 - scaling, 155
 - topology change process, 154
- technologies, 325–326
 - ATM (Asynchronous Transfer Mode), 339–340
 - Ethernet, 326–339

- VLANs, 156–159
- WLANs, 160–162
- workstation-to-router redundancy, 165–166
 - AppleTalk, 166
 - IP, 167–170
 - Novell NetWare, 167
- The Can-Do Manager*, 222
- capacity
 - availability, 30
 - bandwidth, 36
 - performance, 36
 - planning, 28
 - throughput, 39
- CAR (committed access rate), 454
- CBR (Constant Bit Rate), 120–121
- CBWFQ (Class-Based Weighted Fair Queuing), 451–452
- CDN (content delivery network), 100
- CDP (Cisco Discovery Protocol), 91, 311
- cdp holdtime command, 311
- cdp timer command, 311
- CEF (Cisco Express Forwarding), 447–448
- cells per second (CPS), throughput, 39
- central sites
 - remote access device, 375–377
 - servers, 375
- centralized cabling
 - LANs, 320
 - topologies, 322
- centralized monitoring, 306
- CEPT (Committee of European Postal and Telephone) E system, 378
- CGI (Common Gateway Interface), 280
- CGMP (Cisco Group Management Protocol), 432
- chains, hierarchical topology, 144
- Challenge Handshake Authentication Protocol (CHAP), 282, 366–367
- channel aggregation, 147
- CHAP (Challenge Handshake Authentication Protocol), 282, 366–367
- characterization
 - booting
 - AppleTalk, 473–474
 - DHCP, 474–475
 - NetBIOS, 475–476
 - NetWare, 472
 - SNA, 477
 - TCP/IP, 474
- existing networks
 - addressing, 67, 69
 - cabling, 70–76
 - Cisco tools, 91–92
 - internetwork analysis, 76–88
 - mapping, 64–67
 - monitoring, 89–90
 - naming, 67, 69
 - protocol analyzer, 89
 - remote monitoring, 90
- routing protocols, 234
 - classful *versus* classless, 239
 - distance-vector *versus* link-state, 235–238
 - dynamic *versus* static, 240–241
 - hierarchy, 239
 - interior *versus* exterior, 239
 - metrics, 239
 - ODR (On-Demand Routing), 241
 - scalability, 241–243
- traffic behavior
 - broadcast frame, 112–113
 - checklist, 128
 - efficiency, 113–118
 - multicast frame, 112–113
 - QoS requirements, 119–127
- traffic flow
 - client/server, 99–100
 - data stores, 95–96
 - distributed computing, 102–103
 - documenting, 104–105
 - existing networks, 97–98
 - peer-to-peer, 101–102
 - server/server, 102
 - terminal/host, 99
 - thin client, 100–101
 - user communities, 95–96
 - VoIP networks, 103–104
- traffic load, 105
 - application usage, 107–108
 - calculating, 106–107
 - refining application usage, 108–110
 - routing protocols, 111
- Cheapernet cables (10BASE2), 323
- checklists
 - technical goals, 59
 - traffic requirements, 128

check-name queries, 212

CIDR (classless interdomain routing), 199

ciphred data, 274

circuit diversity, redundant WANs, 171

Cisco

- proprietary fragmentation, 436

- technologies, management designs, 313

 - NetFlow, 313–314

 - SAA (Service Assurance Agent), 314

Cisco Discovery Protocol (CDP), 91, 311

Cisco EtherChannel, 338–339

Cisco Express Forwarding (CEF), 447–448

Cisco Group Management Protocol (CGMP), 432

Cisco Internetwork Operating System. *See* IOS

Cisco IOS NetFlow. *See* NetFlow

Cisco Service Assurance Agent (SAA), 91, 314

CiscoBus controller, autonomous switching, 446

CiscoWorks, 91

CiscoWorks Internetwork Performance Monitor (IPM), 92, 414

Class I repeaters, Ethernet, 100-Mbps, 332

Class II repeaters, Ethernet, 100-Mbps, 332

Class-Based Weighted Fair Queuing (CBWFQ), 451–452

classes, addresses routing, 200

classful routing

- discontiguous subnets, 203–204

- protocols, 200, 239

- summarization, 201

- versus* classless, 199–200

classic methods for switching, packets, 445–446

classless routing

- discontiguous subnets, 203–204

- interdomain routing (CIDR), 199

- protocols, 200, 239

- summarization, 201

- versus* classful routing, 199–200

- VLSM (variable-length subnet masking), 204–205

clear text data, 274

client/server traffic flow, 99–100

clients

- constraints, 24

 - budgets, 23–24

 - policies, 21–23

 - staffing, 23–24

- goals, 10

 - enterprise networks, 12–15

 - exploratory research, 10–12

 - identifying applications, 18–21, 24

 - scope of project, 16–18

 - typical business goals, 16

- technical goals, 27

 - adaptability, 55–56

 - affordability, 56–57

 - availability, 29–35

 - checklist, 59

 - design tradeoffs, 58

 - manageability, 54

 - performance, 35–49

 - scalability, 27–29

 - security, 49–54

 - usability, 55

CMTS (Cable Modem Termination System), 371

coaxial cables (coax), 323

.com domains, 216

commands

- show buffers, 87

- show cdp neighbors detail, 91

- show environment, 87

- show interfaces, 87

- show memory, 87

- show processes, 88

- show running-config, 88

- show startup-config, 88

committed access rate (CAR), 454

Committee of European Postal and Telephone (CEPT), E system, 378

Common Gateway Interface (CGI), 280

Common Open Policy Service protocol (COPS protocol), 443

component performance management, 301

computer-technology purchasing guidelines, security, 271

Concurrent Routing and Bridging (CRB), 261

configurations, management, 54, 303–304

congestion, WANs frame relay, 383–384

Constant Bit Rate (CBR), 120–121

constraints

- budgets, 23–24

- businesses, timeframes, 24

- policies, 21–23

- scalability, 29

- staffing, 23–24

Content Addressable Memory tables (CAM tables), 224

content delivery network (CDN), 100

contention slots, cable modems, 371

contiguous backbone areas, OSPF (Open Shortest Path First), 249

contributing source lists (CSRC lists), 437

control frames, 75

controlled-load service

- Integrated Services Working Group, 123–124
- QoS, 437

convergence

- EIGRP (Enhanced Interior Gateway Routing Protocol), 246
- routing protocols, 242–243

COPS protocol (Common Open Policy Service protocol), 443

core layers

- hierarchical topology, 134
- multiple routing protocols, 258
- three-layer hierarchical topology, 142

cost values, 147

cost-effectiveness, 56

count-to-infinity problems, route-update problem, 237

CPS (cells per second), throughput, 39

CPUs

- topology burdens, 135
- traffic, 112

Cramer, Kathryn, *Roads Home: Seven Pathways to Midlife Wisdom*, 300

CRB (Concurrent Routing and Bridging), 261

CRC (cyclic redundancy check), errors, 42, 75, 81

Cricket, 90

CSRC lists (contributing source lists), 437

custom queuing, 450–451

cut-through processing, 225

cyclic redundancy check errors (CRC errors), 42, 75

D

D channel, ISDN, 368

data

- encryption, security design, 274–276
- privacy, wireless network security, 293–295
- scalability, 28–29

- stores (data sink), 96
 - documenting designs, 463
 - Klamath Paper Products WAN, 392
 - LANs design example, 349
- traffic flow, 95–96
- Umqua Systems, Inc. example
 - DS-1 circuit, 423–424
 - FDDI backbone traffic, 419–423
- Data Encryption Standard (DES), 275
- Data Over Cable Service Interface Specification (DOCSIS), 374
- databases, link-state, 248
- Datagram Delivery Protocol (DDP), 252
- data-link connection identifier (DLCI), 382
- DCEF (Distributed CEF), 447
- DDP (Datagram Delivery Protocol), 109, 252
- DDR (dial-on-demand routing), 368
- DE (discard eligibility), 383
- decision making, 222–223
- decryption devices, 274
- dedicated bandwidth queuing, 494
- default gateways, 167
- default routers, 167, 173
- delays (latency), 36
 - analyzing existing networks, 86–87
 - IGRP (Interior Gateway Routing Protocol), 245
 - network performance, 45–46
 - causes, 46–47
 - variations, 48
 - Umqua Systems, Inc. network test example, 425
 - variation, 36
- demilitarized zone (DMZ), 181, 280
- denial-of-service (DoS), 53, 269, 277
- dense modes, PIM (Protocol Independent Multicast), 433–434
- deployment, documenting designs, 465–467
- DES (Data Encryption Standard), 275
- designs
 - analyzing business constraints (clients), 24
 - budgets, 23–24
 - policies, 21–23
 - staffing, 23–24
 - business goals (clients), 10
 - enterprise networks, 12–15
 - exploratory research, 10–12
 - identifying applications, 18–21, 24
 - scope of project, 16–18
 - typical business goals, 16

- cycles, 8
- documenting, 457
 - appendices, 468
 - budgets, 467–468
 - business goals, 461–462
 - data stores, 463
 - devices, 464–465
 - Executive Summary, 460, 468
 - existing networks, 463–464
 - implementation plan, 465–467
 - logical topologies, 464
 - network applications, 463
 - project goal, 460
 - project scope, 460–461
 - RFPs (request for proposal), 458–459
 - technical goals, 462
 - testing, 465
 - user communities, 463
- management, 299–300
 - accounting, 304
 - architecture, 305–307
 - configuration, 303–304
 - fault, 302–303
 - performance, 301–302
 - proactive, 300
 - protocol selection, 307–312
 - security, 304
 - tools, 312–314
- optimization, 429–430
 - IOS tools, 444–454
 - IP multicast, 430–435
 - QoS requirements, 437–444
 - serialization delay, 435–437
- security, 267–268. *See also* security
 - accounting, 274
 - authentication, 272–273
 - authorization, 273
 - compromising, 269
 - encryption, 274–276
 - firewalls, 277–278
 - IDS, 278
 - modular, 278–295
 - packet filters, 277
 - physical, 272
 - planning, 269–270
 - policy development, 270–271
 - procedures, 271
 - risk assessment, 268–269
 - testing, 403–404
 - goals, 403
 - independent test labs, 404–405
 - prototype, 405–412
 - tools, 412–416
 - Umqua Systems, Inc. example, 416–427
 - top-down network methodology, 5–6
 - PDIOO life cycle, 9–10
 - structured process, 7
 - system development life cycle, 7–8
 - topologies, 133
 - tradeoffs, 57–58
 - VLANs, 157–159
- devices
 - decryption, 274
 - documenting designs, 464–465
 - existing network analysis, 87–88
 - internetworks, throughput, 39–40
 - ISDN, 369
 - LANs (local area networks), 341–344
 - prototype testing, 409–410
 - remote-access
 - central sites, 375–377
 - remote users, 374–375
- DHCP (Dynamic Host Configuration Protocol), 191
 - booting, 474–475
 - IP dynamic addressing, 191–193
 - redundant servers, 164
- dial-on-demand routing (DDR), 368
- dialout services, 375
- dial-up access, security, 282–283
- diameter, hierarchical topology, 144
- Differentiated Services field (DS field), 440
- Differentiated Services Working Group, QoS requirements, 125–126
- diffraction, RF signal problem, 75
- diffusing-update algorithm (DUAL), EIGRP (Enhanced Interior Gateway Routing Protocol), 246
- digital signatures, 276
- digital streams (DS), 377
- Digital Subscriber Line. *See* DSL
- Dijkstra, Edsger, algorithm, 238
- disaster recovery, network availability, 30–31
- discard eligibility (DE), 383
- discontiguous subnets, 69, 201–204
- DISL (Dynamic Inter-Switch Link), 231–232

- distance-vector routing protocols, 235
 - hold-down timer, 236–237
 - link-state, 237–238
 - poison-reverse, 237
 - split-horizon technique, 236
 - versus* link-state protocol, 238
- distributed authority, business constraints (clients), 22
- distributed cabling
 - LANs, 320
 - topologies, 322
- Distributed CEF (DCEF), 447
- distributed computing traffic flow, 102–103
- distributed monitoring, 306–307
- distributed switching, 446
- distributed weighted random early detection (D-WRED), 454
- distribution layers
 - hierarchical topology, 134
 - multiple routing protocols, 258
 - three-layer hierarchical topology, 142–143
- distribution submodules, campus network topology, 150
- distribution trees, PIM (Protocol Independent Multicast), 434
- DIX standard, 327
- DLCI (data-link connection identifier), 382
- DMZ (demilitarized zone), 181, 280
- DNS (Domain Name System), 215, 280
 - IP naming models, 215–217
 - NetBT, 214, integrating WINS, 214–215
 - public server access, 280
- DNS and BIND*, 216
- DNS round robin, 165
- DOCSIS (Data Over Cable Service Interface Specification), 374
- documenting
 - designs, 457
 - appendices, 468
 - budgets, 467–468
 - business goals, 461–462
 - data stores, 463
 - devices, 464–465
 - Executive Summary, 460, 468
 - existing networks, 463–464
 - implementation plan, 465–467
 - logical topologies, 464
 - network applications, 463
 - project goal, 460
 - project scope, 460–461
 - RFPs (request for proposal), 458–459
 - technical goals, 462
 - testing, 465
 - user communities, 463
 - QoS requirements, 127
 - traffic flow, 104–105
- Domain Name System. *See* DNS
- domains, 112, 215
- DoS (denial-of-service), 53, 277
- downstream bandwidths, cable modems, 371
- downtime
 - availability, 32
 - costs, 34
 - redundancy, 30
- DS (digital streams), 377
- DS field (Differentiated Services field), 440
- DS-1 circuit, Umqua Systems, Inc. example, 423–424
- DSL (Digital Subscriber Line), 363
 - enterprise network remote access, 372
 - ADSL PPP implementation, 373–374
 - supported services, 373
- DSTM (Dual-Stack Transition Mechanism), 209
- DUAL (diffusing-update algorithm), EIGRP (Enhanced Interior Gateway Routing Protocol), 246
- dual stacks, IPv4 to IPv6 addresses, 209
- Dual-Stack Transition Mechanism (DSTM), 209
- duplexing, LANs, 164
- D-WRED (distributed weighted random early detection), 454
- dynamic addresses, network layer, 188–189
 - AppleTalk, 189–190
 - IP, 191–195
 - NetWare, 190
- dynamic allocation, DHCP IP addressing, 191
- Dynamic Host Configuration Protocol. *See* DHCP
- Dynamic Inter-Switch Link (DISL), 231–232
- dynamic names, DNS (Domain Name System), 217
- dynamic routing protocols *versus* static routing protocols, 240–241

E

- E system, 378
- EAP-MD5, 293
- EAP-TLS (EAP-Transport Layer Security), 292
- EAP-Transport Layer Security (EAP-TLS), 292
- EAP-TTLS (EAP-Tunneled TLS), 292
- EAP-Tunneled TLS (EAP-TTLS), 292
- eBGP (External BGP), 251
- echo requests, 192
- e-commerce servers
 - public access, 280
 - securing, 281
- edges, Enterprise Composite Network Model, 149
- .edu domains, 216
- efficiency, 36
 - existing networks, 84–85
 - performance, 43–45
 - traffic behavior
 - error-recovery mechanisms, 118
 - flow control, 116–118
 - frame size, 113
 - protocol interaction, 114–116
 - windowing, 116–118
- EGP (Exterior Gateway Protocol), 251
- EIGRP (Enhanced Interior Gateway Routing Protocol), 246–247, 262, 280
 - AppleTalk routing protocol, 254
 - classless routing, 200
 - NetWare routing protocol, 256
- E-LAN service (Ethernet LAN service), 337
- E-line service (Ethernet line service), 337
- e-mail, public server access, 280
- encapsulating bridging, 223
- encryption
 - algorithms, 275
 - key, 275
 - security design, 274–276
- end-to-end Frame Relay fragmentation, 436
- end-to-end performance management, 301
- Enhanced Interior Gateway Routing Protocol (EIGRP), 200, 246–247, 280
- ens (RIPE) Network Coordination Center, 187
- enterprise campus, Enterprise Composite Network Model, 148
- Enterprise Composite Network Model, modular topology, 148–149
- enterprise edge topologies, 170
 - Enterprise Composite Network Model, 149
 - multihoming, 171–174
 - redundant WANs, 170–171
 - service provider, 178–180
 - VPNs (virtual private networks), 175
 - remote-access, 177
 - site-to-site, 176
- enterprise networks, 18. *See also* networks
 - analyzing, 76
 - accuracy, 81–83
 - availability, 77–78
 - devices, 87–88
 - efficiency, 84–85
 - performance baseline, 77
 - response time, 86–87
 - utilization, 78–81
 - business goals (clients), 12
 - mission critical, 13
 - mobile users, 14
 - security considerations, 14–15
 - characterization tools
 - Cisco tools, 91–92
 - monitoring, 89–90
 - protocol analyzer, 89
 - remote monitoring, 90
 - existing, 63
 - addressing, 67–69
 - cabling, 70–76
 - mapping, 64–67
 - naming, 67–69
 - ISDNs (Integrated Services Digital Network), 369
 - remote-access, 364
 - cable modem, 370–372
 - device selection, 374–377
 - DSL (Digital Subscriber Line), 372–374
 - ISDN (Integrate Services Digital Network), 367–370
 - PPP (Point-to-Point Protocol), 365–367
 - servers, 375
 - technical goals, 27
 - adaptability, 55–56
 - affordability, 56–57
 - availability, 29–35
 - checklist, 59
 - design tradeoffs, 58

- manageability, 54
- performance, 35–49
- scalability, 27–29
- security, 49–54
- usability, 55
- WANs, 377
 - ATM (Asynchronous Transfer Mode), 385–387
 - bandwidth, 377–378
 - design example, 389–396
 - Frame Relay, 381–385
 - leased lines, 379
 - routers, 387
 - service providers, 387–389
 - SONET (Synchronous Optical Network), 379–380
- environmental constraints, 73–76
- errors
 - CRC, 42
 - recovery mechanisms, 118
- EtherChannel, 338–339
- Ethernet
 - analyzing switch ports, 82–83
 - collision domain, 329
 - LANs technology, 326–328
 - 100-Mbps, 331–332
 - 10-Gbps, 334–335
 - 10-Mbps, 329–330
 - EtherChannel, 338–339
 - full-duplex, 328–329
 - Gigabit, 332–334
 - half-duplex, 328–329
 - IEEE 802.3 standard, 327
 - LRE (Long-Reach Ethernet), 337–338
 - Metro, 336–337
 - optimum performance, 37
 - over ATM, 386–387
 - switches, 223
 - spanning-tree algorithm, 227–231
 - transparent bridging, 224–225
 - transparent switching, 225–227
 - traffic load, 109
 - wireless analysis, 76
- Ethernet II, 327
- Ethernet LAN service (E-LAN service), 337
- Ethernet line service (E-line service), 337
- Ethernet virtual circuit (EVC), 336
- EVC (Ethernet virtual circuit), 336
- Events group, RMON, 310
- Executive Summaries, documenting designs, 460, 468
- existing networks, 63
 - addressing, 67–69
 - analyzing, 76
 - accuracy, 81–83
 - availability, 77–78
 - devices, 87–88
 - efficiency, 84–85
 - performance baseline, 77
 - response time, 86–87
 - utilization, 78–81
 - cabling, 70–76
 - characterization tools
 - Cisco tools, 91–92
 - monitoring, 89–90
 - protocol analyzer, 89
 - remote monitoring, 90
 - documenting designs, 463–464
 - Klamath Paper Products WAN, 392–394
 - mapping, 64
 - block diagram, 67
 - development tools, 64
 - large internetworks, 64–66
 - logical topology, 66–67
 - naming, 67–69
 - traffic flow, 97–98
 - Umqua Systems, Inc. example, 418
- expansion (networks), planning, 27–28
- Exterior Gateway Protocol (EGP), 251
- exterior routing protocols, 239
- External BGP (eBGP), 251
- extranet VPNs, 175
- extranets, 28

F

- failure analysis, prototypes tests, 408
- Fast Ethernet, 331–332
- fast switching, 424, 445–446
- fault management, 54, 302–303

FDDI

- traffic load, 109
- Umqua Systems, Inc., backbone traffic, 419–423
- feasible successors, EIGRP (Enhanced Interior Gateway Routing Protocol), 247
- FECN (Forward explicit congestion notification), 383
- feedback, routing protocol redistribution, 260
- FIB (forwarding information base), 447
- fiber-optic cables, 323–325
- Fiber-Optic Inter-Repeater Link (FOIRL), 330
- fields, TTL, 302
- FIFO (first in, first out queuing), 448–449
- File Transfer Protocol (FTP), 280
- filters, packet, 277
- Filters group, RMON, 310
- find-name queries, 213
- find-network-number request, workstation-to-router redundancy, 167
- firewalls
 - existing network analysis, 87–88
 - network security, 180–181
 - proxy, 278
 - security design, 277–278
 - stateful, 278
 - static packet-filters, 278
- first in, first out queuing (FIFO), 448–449
- five nines availability, 32–33
- flat topologies
 - LANs, 138
 - versus* hierarchical topology, 136
 - WANs, 136–137
- flexible applications, 127
- floating static routes, 261
- floods, transparent bridge, 224
- flow control, traffic efficiency, 116–118
- flow-based WRED, 454
- FlowCollector and Data Analyzer, 91
- FOIRL (Fiber-Optic Inter-Repeater Link), 330
- format prefix, IPv6 address, 206
- Forward explicit congestion notification (FECN), 383
- forwarding, STP state, 152
- forwarding information base (FIB), 447
- frame corruption, analyzing wireless utilities, 75

Frame Relay

- fragmentation methods, 436
- split horizon, 383
- traffic shaping, 454
- WANs, 381–382
 - ATM (Asynchronous Transfer Mode), 385
 - congestion, 383–384
 - hub-and-spoke topology, 382–383
 - subinterfaces, 382–383
 - traffic control, 384–385
- Frame Relay Forum Web site, 385
- frames
 - headers, efficiency, 43
 - maximum sizes, 44
 - serialization delay, 45
 - sizing, 84
 - traffic efficiency, 113
- free-trade zones, 181
- FTPs (File Transfer Protocol), 280
- full-duplex Ethernet, 328–329
- full-mesh topologies, 138–140
- fur-ball networks, 135

G

- G.SHDSL, 373
- Garcia-Luna-Aceves, Dr. J. J., diffusing-update algorithm (DUAL), 246
- Gateway Load Balancing (GLBP), IP workstation-to-router redundancy, 170
- gateways of last resort, 173
- generic routing encapsulation (GRE), 175, 254
- Get Request packets, SNMP, 308
- Get-Bulk Request packets, SNMP, 308
- Get-Next Request packets, SNMP, 308
- GFR (guaranteed frame rate), 122
- giaddr field, 164
- Gigabit Ethernet, 332–334
- GLBP (Gateway Load Balancing), IP workstation-to-router redundancy, 170
- global synchronization, 453
- goals
 - business (clients), 10
 - enterprise networks, 12–15
 - exploratory research, 10–12

- identifying applications, 18–21, 24
- Klamath Paper Products WAN, 390
- LANs design example, 345–346
- scope of project, 16–18
- typical business goals, 16
- decision making, 222–223
- documenting
 - business goals, 461–462
 - technical goals, 462
- project goal documentation, 460
- prototype design scope, 405–407
- technical, 27
 - adaptability, 55–56
 - affordability, 56–57
 - availability, 29–35
 - checklist, 59
 - design tradeoffs, 58
 - Klamath Paper Products WAN, 390
 - LANs design example, 346
 - manageability, 54
 - performance, 35–49
 - scalability, 27–29
 - security, 49–54
 - usability, 55
- Umqua Systems, Inc. example, 416–417
- goodput (application layer throughput), 40
- GoS (grade of service), QoS requirements, 126–127
- .gov domains, 216
- grade of service (GoS), QoS requirements, 126–127
- GRE (generic routing encapsulation), 175, 254
- growth, scalability, 27
 - constraints, 29
 - data access, 28–29
 - expansion planning, 27–28
- guaranteed frame rate (GFR), 122
- guaranteed services, 124–127, 437

H

- hackers, security risks, 52
- half-duplex Ethernet, 328–329
- HDSL (High-Bit-Rate DSL), 109, 373
- HDSL-2, 373
- headers, efficiency problems, 43
- Heisenberg uncertainty principle, 299

- HFC (hybrid fiber/coax), 370
- hierarchical addressing, 197
 - benefits, 198
 - CIDR (classless interdomain routing), 199
 - classless *versus* classful routing, 199–200
 - discontiguous subnets, 203–204
 - IPv6, 205–206
 - aggregatable global, 207–208
 - IPv4 in IPv6, 208–209
 - link-local, 207
 - moving from IPv4, 209
 - site-local, 207
 - route summarization, 201
 - network example, 201–202
 - requirements, 202–203
 - routing, 198
 - VLSM (variable-length subnet masking), 204–205
- hierarchical routing, 198, 239
- hierarchical topologies, 133–134
 - guidelines, 143–145
 - mapping, 67
 - multiple routing protocols, 257
 - reasons for use, 135–136
 - flat LAN topologies, 138
 - flat topologies, 136
 - flat WAN topologies, 136–137
 - mesh *versus* hierarchical-mesh topologies, 138–140
 - three-layer, 141
 - access layer, 143
 - core layer, 142
 - distribution layer, 142–143
- hierarchical-mesh topologies, 138–140
- High-Bit-Rate DSL (HDSL), 373
- History group, RMON, 309
- hold-down timers
 - distance-vector routing protocols, 236–237
 - IGRP (Interior Gateway Routing Protocol), 246
- hops
 - counts, 235
 - RIP (Routing Information Protocol), 243
- horizontal wiring, 70–72
- Host Top N group, RMON, 310
- hosts, mobile, 204
- Hosts group, RMON, 310

Hot Standby Router Protocol (HSRP), IP
workstation-to-router redundancy, 168–169
HSRP (Hot Standby Router Protocol), IP
workstation-to-router redundancy, 168–169
HTTP (Hypertext Transfer Protocol), traffic, 100
hub-and-spoke topologies, 140, 382–383
hubs, 332, 341
human errors, availability, 33
hybrid fiber/coax (HFC), 370
Hypertext Transfer Protocol (HTTP), 100

iBGP (Internal BGP), 251
ICANN (Internet Corporation for Assigned Names and Numbers), 216
ICMP (Internet Control Message Protocol), 192
echo requests, 192
router solicitation packet, 168
ICSA labs, 404
idle time, traffic load, 106
IDS (intrusion detection system), 278
ISDL (ISDN DSL), 373
IEEE 802.1p, classifying LAN traffic, 443–444
IEEE 802.1Q document (VLAN ID frame tagging), 232–233
IEEE 802.1X, wireless network authentication, 291–293
IEEE 802.3, traffic load, 109
IEEE 802.3 standard (Ethernet LANs technology), 327
IEEE 802.5, traffic load, 109
IGMP (Internet Group Management Protocol), 431–432
IGRP (Interior Gateway Routing Protocol), 111, 200, 262
IKE (Internet Key Exchange), 283
implementation plan, documenting designs, 465–467
in-band monitoring, 306
in-band signaling, QoS, 441
independent test labs, 404–405
individual network traffic flows, 97
inflexible applications, 127
Inform packets, SNMP, 308
information dissemination, 102

infrastructure, existing networks
addressing, 67, 69
cabling, 70–76
mapping, 64–67
naming, 67–69
initialization, workstations, 109–110
Integrated Routing and Bridging (IRB), 261
Integrated Services Digital Network. *See* ISDN
Integrated Services Working Group, QoS
requirements, 122–123
controlled-load service, 123–124
guaranteed service, 124–125
Interior Gateway Routing Protocol (IGRP), 200, 244–246
interior routing protocols, 239
Intermediate System-to-Intermediate System (IS-IS), 200, 237, 250
Internal BGP (iBGP), 251
international network topologies, 145
International Organization for Standardization. *See* ISO
Internet
address shortage, 196
modular security design, 279–280
e-commerce servers, 281
public servers, 280–281
multihoming, 171–174
Internet Control Message Protocol. *See* ICMP
Internet Corporation for Assigned Names and Numbers (ICANN), 216
Internet Group Management Protocol (IGMP), 431–432
Internet Key Exchange (IKE), 283
Internet Protocol Performance Metrics (IPPM), 92
Internetwork Operating System. *See* IOS
Internetwork Packet Exchange Routing Information Protocol (IPX RIP), 254–255, 262
Internetwork Performance Monitor (IPM), 92, 414
internetworks (enterprise networks)
analyzing, 76
accuracy, 81–83
availability, 77–78
devices, 87–88
efficiency, 84–85
performance baseline, 77
response time, 86–87
utilization, 78–81

- characterization tools
 - Cisco tools, 91–92
 - monitoring, 89–90
 - protocol analyzer, 89
 - remote monitoring, 90
- device selection, 341–342
- mapping, 64–66
- multiple routing protocols, 257
 - access layer, 258
 - core layer, 258
 - distribution layer, 258
 - hierarchical topology, 257
 - IRB (Integrated Routing and Bridging), 261
 - redistribution, 259–261
- naming models, 209–210
 - administration, 210–211
 - assignment guidelines, 211–212
 - IP, 215–217
 - NetBIOS, 212–215
- throughput, 39–40
- Interoperability Lab (IOL), 404
- Inter-Switch Link (ISL), 231
- intrusion detection system (IDS), 278
- IOS (Internetwork Operating System), 444
 - network optimization tools
 - CAR (committed access rate), 454
 - packet switching, 444–448
 - queuing, 448–453
 - RED (random early detection), 453–454
 - traffic shaping, 454
- IP (Internet Protocol)
 - addresses
 - LANs design example, 355–356
 - shortage, 196
 - AppleTalk migration, 254
 - broadcast traffic, 113
 - dynamic addresses, 191
 - DHCP (Dynamic Host Configuration Protocol), 191–193
 - IPv6, 193–194
 - Zeroconf, 194–195
 - header, 438
 - migration to NetWare routing, 256–257
 - multicast optimization, 430–431
 - addressing, 431
 - IGMP (Internet Group Management Protocol), 431–432
 - routing protocols, 432–435
 - naming models, 215–217
 - precedence, 438–439
 - DS (Differentiated Services) field, 440
 - field, 439
 - private addresses, 195–196
 - disadvantages, 196
 - NAT (Network Address Translation), 197
 - routing protocols
 - BGP (Border Gateway Protocol), 251–252
 - EIGRP (Enhanced Interior Gateway Routing Protocol), 246–247
 - IGRP (Interior Gateway Routing Protocol) XE, 244–246
 - IS-IS, 250–251
 - OSPF (Open Shortest Path First), 247–250
 - RIP (Routing Information Protocol), 243–244
 - traffic load, 109
 - workstation-to-router redundancy, 167–168
 - GLBP (Gateway Load Balancing Protocol), 170
 - HSRP (Hot Standby Router Protocol), 168–169
- ip forward-protocol command, 193
- ip helper address command, 164
- ip helper-address command, 193
- IP Security Protocol (IPSec), 283
- IP version 6. *See* IPv6
- ip_input queue, process switching, 445
- IPM (CiscoWorks Internetwork Performance Monitor), 92, 414
- IPPM (Internet Protocol Performance Metrics), 92
- IPSec (IP Security Protocol), 283
- IPv4 (IP version 4)
 - addresses, moving to IPv6, 209
 - compatible IPv6 addresses, 208
 - mapped IPv6 addresses, 209
- IPv6 (IP version 6), 193
 - dynamic addressing, 193–194
 - hierarchical addresses, 205–206
 - aggregatable global, 207–208
 - IPv4 in IPv6, 208–209
 - link-local, 207
 - moving from IPv4, 209
 - site-local, 207
 - name resolution, 217
 - QoS, 440

IPX, traffic load, 109
ipx maximum-paths command, load sharing, 147
IPX RIP (Internetwork Packet Exchange Routing Information Protocol), 254–255, 262
ipx type-20 propagation command, 213
IRB (Integrated Routing and Bridging), 261
IS departments, network layer addresses, 187
ISDN (Integrated Services Digital Network), 363, 369
 enterprise network remote access, 367–370
 NT1 devices, 369
ISDN DSL (IDSL), 373
IS-IS (Intermediate System-to-Intermediate System), 237, 250, 262
 classless routing, 200
 routing protocol, 250–251
ISL (Inter-Switch Link), 231
ISO (International Organization for Standardization), management, 300
 accounting, 304
 architecture, 305–307
 configuration, 303–304
 fault, 302–303
 performance, 301–302
 protocol selection, 307–312
 security, 304
 terminology, 54
 tools, 312–314
ISPs, stub networks, 240
IT Guru (OPNET), 415

J-K

Jain, Raj, *The Art of Computer Systems Performance Analysis*, 403
jitter, 45

KDC (key distribution center), 286
keepalive frames, convergence, 242
Kerberos, 286
key distribution center (KDC), 286
KeyLabs, 404
keys
 asymmetric, 275
 encryption, 275
 IPSec, 283

 public/private, 275–276
 secret, 275
 symmetric, 275
Kirby, Tess, *The Can-Do Manager*, 222
Klamath Paper Products WAN
 business goals, 390
 current network, 392–394
 data stores, 392
 network applications, 390–391
 project background information, 389–390
 technical goals, 390
 topology, 394–396
 user communities, 391

L

L2TPv3, Layer 2 tunneling, 175
LANs (local area networks), 18, 319
 accuracy goals, 42
 cabling, 320
 topology, 320–323
 types, 323–325
 design example
 background information, 345
 business goals, 345–346
 current network, 349–355
 data stores, 349
 network applications, 347
 redesign, 355–359
 technical goals, 346
 user communities, 347–348
 devices, 341–344
 flat topologies, 138
 free-trade zones, 181
 optimum performance, 37
 redundant, 162–163
 technologies, 325–326
 ATM (Asynchronous Transfer Mode), 339–340
 Ethernet, 326–339
 traffic, IEEE 802.1p, 443–444
LAT (Local Area Transport), delay sensitivity, 46
late collisions, 42
latency (delay), 36. *See also* delays
layers, network addresses, 186–196
 central authority, 187–188
 NAT (Network Address Translation), 197

LEAP (Lightweight EAP), 292
 learning, STP state, 152
 leased lines, WANs, 379
 LFI (Link-Layer Fragmentation and Interleaving), 435–436
 LFNs, 116
 Lightweight EAP (LEAP), 292
 line layers, SONET, 380
 line-side interface, 104
 Link-Layer Fragmentation and Interleaving (LFI), 435–436
 link-local addresses, 207
 links, redundancy, 30
 link-state advertisements (LSAs), 238
 link-state
 databases, 248
 protocol *versus* distance-vector protocol, 238
 routing protocols, 237–238
 listening, STP state, 152
 Liu, Cricket, *DNS and BIND*, 216
 LLC2 (Logical Link Control protocol), 45
 LLQ (Low-Latency Queuing), 452–453
 lmhosts files, NetBT, 214
 load, IGRP (Interior Gateway Routing Protocol), 245
 load balancing, IGRP (Interior Gateway Routing Protocol), 147, 245
 load sharing, redundant topology, 147–148
 load-duration curves, 422
Local and Metropolitan Area Networks, 106
 local area networks. *See* LANs
 Local Area Transport (LAT), delay sensitivity, 46
 LocIfInIgnored variable, 88
 LocIfInputQueueDrops variable, 88
 LocIfOutputQueueDrops variable, 88
 logging, version, 303
 Logical Link Control protocol (LLC2), 45
 logical topologies
 documenting designs, 464
 mapping, 66–67
 Long-Reach Ethernet (LRE), 337–338
 long wavelength Ethernet, 334
 Loop Guard, 230–231
 loops
 inconsistent state, 230
 Loop Guard, 230–231
 topologies, 137

Low-Latency Queuing (LLQ), 452–453
 LRE (Long-Reach Ethernet), 337–338
 LSAs (link-state advertisements), 238

M

MAC addresses
 tables, 224
 wireless network authentication, 290–291
 MAN (metropolitan-area network), 379
 manageability
 documenting, 462
 technical goals, 54
 management designs, 299–300
 accounting, 304
 architecture, 305–306
 centralized monitoring, 306
 distributed monitoring, 306–307
 in-band monitoring, 306
 out-of-band monitoring, 306
 configuration, 303–304
 fault, 302–303
 performance, 301–302
 proactive, 300
 protocols
 CDP, 311
 SNMP, 307–311
 traffic estimations, 312
 security, 304
 tools, 312–314
 Management Information Bases. *See* MIBs
 manual allocation, DHCP IP addressing, 191
 mapping existing networks, 64
 block diagram, 67
 development tools, 64
 large internetworks, 64–66
 logical topology, 66–67
 master browsers, NetBT, 213
 Matrix group, RMON, 310
 maximum cell delay variation (MCDV), 48
 maximum cell transfer delay (MCTD), 48
 maximum transmission units (MTUs), 113
 McCabe, James D., *Network Analysis, Architecture, and Design*, 99
 MCDV (maximum cell delay variation), 48

McDysan, David E., *ATM Theory and Applications*, 108

MCR (minimum cell rate), 122

MCTD (maximum cell transfer delay), 48

mDNS (multicast DNS), 194

mean time between failures (MTBF), 34–35, 77

mean time between service outage (MTBSO), 34

mean time to repair (MTTR), 34–35, 77

mean time to service repair (MTTSR), 34

mesh topologies, *versus* hierarchical-mesh topology, 138–140

methods, Umqua Systems, Inc. example, 419

metric weights command, 245

metrics, routing protocol, 239, 260

Metro Ethernet, 336–337

metropolitan-area network (MAN), 379

MIBs (Management Information Bases), 308

 RMON (remote monitoring), 90, 309

 SNMP, 308–309

Miercom labs, 404

minimum cell rate (MCR), 122

mirrored servers, 165

MLSP (Multilayer Switching Protocol), 226

mobile codes, 280

mobile hosts, 204

Modeler (OPNET), 415

modems, 363

 callbacks, 282

 enterprise network remote access, 370–372

modular security design, 278–279

 Internet connections, 279–281

 network services, 284–285

 remote access, 282–283

 server farms, 285–286

 user services, 286–287

 VPNs, 283–284

 wireless networks, 287–288

 authentication, 288–293

 data privacy, 293–295

modular topologies, 135, 148–149

monitoring

 centralized, 306

 distributed, 306–307

 existing network, 89–90

 in-band, 306

 out-of-band, 306

 performance, 301–302

MOSPF (Multicast Open Shortest Path First), 432–433

MPLS (Multiprotocol Label Switching), 227

MPPP (Multilink PPP), 147, 365–366, 435

MRTG (Multi Router Traffic Grapher), 89

MSTP (Multiple Spanning Tree Protocol), 162

MTBF (mean time between failures), 34–35, 77

MTBSO (mean time between service outage), 34

MTTR (mean time to repair), 34–35, 77

MTTSR (mean time to service repair), 34

MTUs (maximum transmission units), 113

Multi Router Traffic Grapher (MRTG), 89

multicast addresses, IPv6, 206

multicast DNS (mDNS), 194

multicast frames, traffic behavior, 112–113

multicast IP, bandwidth optimization, 430–431

 addressing, 431

 IGMP (Internet Group Management Protocol), 431–432

 routing protocols, 432–435

Multicast Open Shortest Path First (MOSPF), 432–433

Multichassis MPPP, 366

multihoming, enterprise edge topology, 171–174

multilayer switching, 226–227

Multilayer Switching Protocol (MLSP), 226

Multilink Point-to-Point Protocol (MPPP), 147, 365–366

multimode fiber optic cables, 325

multiple access points, WLANs, 161

multiple routing protocols, 257

 access layer, 258

 core layer, 258

 distribution layer, 258

 hierarchical topologies, 257

 IRB (Integrated Routing and Bridging), 261

 redistribution, 259–260

 administrative distance, 260–261

 metrics, 260

Multiple Spanning Tree Protocol (MSTP), 162

multipoint to multipoint EVCs, 337

multiprotocol internetworks, 45

Multiprotocol Label Switching (MPLS), 227

N

- Name servers, 164
- naming models, 209–210
 - administration, 210–211
 - assignment guidelines, 211–212
 - existing networks, 67–69
 - IP, 215–217
 - NetBIOS, 212
 - NetBEUI, 212–213
 - NetBT, 213–215
 - NWLink, 213
- NAT (Network Address Translation), 197, 280
- NAT-Protocol Translation (NAT-PT), 209
- NAT-PT (NAT-Protocol Translation), 209
- natural disasters, network availability, 30–31
- NBAR (Network-based application recognition), 91
- NCP (NetWare Core Protocol), 100, 256, 368
- .net domains, 216
- NetBEUI, 212–213, 475–476
- NetBIOS
 - booting, 475–476
 - broadcast traffic, 113
 - naming models, 211–212
 - NetBEUI, 212–213
 - NetBT, 213–215
 - NWLink, 213
- NetBT, 213
 - broadcasts, 213
 - DNS, 214–215
 - lmhosts files, 214
 - WINS, 214–215
- NetFlow, 313–314
 - switching, 446–447
 - technology, 91
- NetIQ, design test tools, 415
- NetPredictor, 415–416
- NetWare
 - booting, 472
 - broadcast traffic, 113
 - dynamic addressing, 190
 - NWLink, 213
 - routing protocol, 254
 - EIGRP (Enhanced GRP), 256
 - IPX RIP (Internetwork Packet Exchange Routing Information Protocol), 255
 - migration to IP routing, 256–257
 - NLSP (NetWare Link Services Protocol), 255
 - workstation-to-router redundancy, 167
 - NetWare Core Protocol (NCP), 100, 256, 368
 - NetWare Link Services Protocol (NLSP), 237, 254
 - Network Address Translation (NAT), 197, 280
 - Network Analysis, Architecture, and Design*, 99, 102
 - Network Associates, Sniffer Network Analyzer, 89
 - Network File System (NFS), 100
 - Network Health Checklist, 92–93
 - network interface cards (NICs), 56, 75
 - Network Layer Host group, RMON2, 311
 - Network Layer Matrix group, RMON2, 311
 - Network-based application recognition (NBAR), 91
 - Network-Planning and Analysis Tool (NPAT), 414
 - networks. *See also* enterprise networks
 - applications, documenting designs, 463
 - building, 18
 - businesses, timeframes, 24
 - campus, 18
 - existing, 63
 - addressing, 67–69
 - analyzing, 76–88
 - cabling, 70–76
 - characterization tools, 89–92
 - mapping, 64–67
 - naming, 67–69
 - traffic flow, 97–98
 - extranets, 28
 - LANs, 18, 347–359
 - layers, addresses, 186
 - administrator assignment, 188
 - central authority, 187–188
 - dynamic, 188–195
 - private IP, 195–197
 - structured model, 186–187
 - organizational model, 28
 - security, 180–181
 - services, security, 284–285
 - VPNs, security, 283–284
 - WANs. *See* WANs
 - wireless security, 287–295
 - next-hops, RIP (Routing Information Protocol), 244
 - NFS (Network File System), 100
 - NICs (network interface cards), 56, 75, 112
 - NLSP (NetWare Link Services Protocol), 237, 254–255, 262

- no ip forward-protocol command, 193
- no ip route-cache command, 426
- nodes
 - distributed computing, 103
 - traffic load, 106–107
- nonperiodic updates, 246
- non-realtime variable bit rate (nrt-VBR), 121
- nonrepudiation, security, 284
- not-so stubby areas, 250
- Novell NetWare. *See* NetWare
- NPAT (WANDL, Inc. Network-Planning and Analysis Tool), 414
- nrt-VBR (non realtime variable bit rate), 121
- NT1 devices, ISDN, 369
- NT2 devices, ISDN, 369
- NWLink, 213

O

- objectives, test prototypes, 407–408
- ODR (On-Demand Routing), 241
- offered load (traffic load), 36, 106
- offload servers, 366
- omnidirectional antennas, WLANs, 160
- On-Demand Routing (ODR), 241
- one-time passwords (OTP), 51, 272
- open authentication, 289
- Open Shortest Path First (OSPF), 237, 280
 - classless routing, 200
 - IP routing protocol, 247–250
- Open System Interconnection (OSI), IS-IS routing protocol, 250
- Open Systems Interconnection reference model. *See* OSI
- OPNET, design testing tools, 415
- optimization
 - LANs devices, 344
 - network design, 429–430
 - IOS tools, 444–454
 - IP multicast, 430–435
 - QoS requirements, 437–444
 - serialization delay, 435–437
- optimum switching, 446
- optimum utilization, 36
- Oracle user data, Umqua Systems, Inc. network test example, 424–425

- .org domains, 216
- OSI (Open System Interconnection)
 - IS-IS routing protocol, 250
 - reference model, 5
 - layers, 6
 - scope network design, 17
 - transparent switching, 225–226
- OSPF (Open Shortest Path First), 237, 262, 280
 - classless routing, 200
 - IP routing protocol, 247–250
- ospf auto-cost reference-bandwidth command, 248
- OTP (one-time passwords), 51
- out-of-band monitoring, 306
- out-of-band signaling, QoS, 441
- overloading addresses, 197

P

- P reference point, ISDN, 370
- Packet Capture group, RMON, 310
- packet classifiers, RSVP, 123
- packet filters
 - ATM (Asynchronous Transfer Mode), 340
 - security design, 277
- packet infrastructure layer, 103
- Packet Over SONET (POS), 379
- packets
 - booting
 - AppleTalk, 473–474
 - DHCP, 474–475
 - NetBIOS, 475–476
 - NetWare, 472
 - SNA, 477
 - TCP/IP, 474
 - schedulers, RSVP, 123
 - serialization delay optimization, 435
 - LFI (Link-Layer Fragmentation and Interleaving), 435–436
 - RTP (Real Time Protocol), 436–437
 - SNMP, 308
 - switching, 444–445
 - CEF (Cisco Express Forwarding), 447–448
 - classic methods, 445–446
 - NetFlow switching, 446–447
- packets per second (PPS), throughput, 39–40

- packet-switching delays, 46
- PAP (Password Authentication Protocol), 282, 366–367
- parameter RAM, 190
- partial updates, 246
- partial-mesh topologies, 138
- Password Authentication Protocol (PAP), 282, 366
- passwords, 271–272
- paths
 - attributes, 252
 - backup, redundant topology, 146–147
 - layers, SONET, 380
- payload, RTP (Real-Time Protocol), 436
- PCR (peak cell rate), 122
- PDIOO (Plan Design Implement Operate Optimize), 9–10
- PDPs (policy-decision points), 443
- peak cell rate (PCR), 122
- PEAP (Protected EAP), 292
- peer relationships, 179
- peer-to-peer traffic flow, 101–102
- PEPs (policy-enforcement points), 443
- Per VLAN Spanning Tree+ (PVST+), 162
- performance
 - documenting, 462
 - existing networks, 76
 - accuracy, 81–83
 - baseline, 77
 - devices, 87–88
 - efficiency, 84–85
 - response time, 86–87
 - utilization, 78–81
 - management, 54, 301–302
 - prototypes tests, 408
 - technical goals, 35
 - accuracy, 42–43
 - definitions, 35–36
 - delay, 45–48
 - efficiency, 43–45
 - optimum utilization, 36–38
 - response time, 48–49
 - throughput, 39–41
 - testing designs, 403–404
 - goals, 403
 - independent test labs, 404–405
 - prototype, 405–412
 - tools, 412–416
 - Umqua Systems, Inc. example, 416–427
- Periscope Network Analysis Appliance, 90
- permanent virtual circuits (PVCs), 336, 381
- personal identification number (PIN), 272
- personnel
 - issues, business constraints (clients), 21
 - network operation affordability, 57
- phantom routers, 168
- photonic layers, SONET, 380
- physical designs, documenting designs, 464–465
- physical security, 180, 272
- PIM (Protocol-Independent Multicast), 432–433
 - dense mode, 433–434
 - sparse mode, 434–435
- PIN (personal identification number), 272
- ping packets, 192
- ping-pong protocols, 117
- pinhole congestion, 148
- plain text data, 274
- Plan Design Implement Operate Optimize (PDIOO), 9–10
- planning
 - disaster recovery, availability, 30–31
 - scalability, 27–28
 - security, 269–270
- plesiochronous systems, 380
- point-to-point Ethernet, 328
- point-to-point EVCs, 337
- Point-to-Point Protocol. *See* PPP
- poison-reverse, distance-vector routing protocols, 237
- policies
 - business constraints (clients), 21–23
 - security, 270–271
- policy-decision points (PDPs), 443
- policy-enforcement points (PEPs), 443
- politics, business constraints (clients), 21–23
- port translation, NAT (Network Address Translation), 197
- PortFast, 227–228
- POS (Packet Over SONET), 379
- PPP (Point-to-Point Protocol), 282, 363
 - enterprise network remote access, 365
 - CHAP (Challenge Handshake Authentication Protocol), 366–367
 - MPPP (Multilink PPP), 365–366
 - PAP (Password Authentication Protocol), 366–367
 - layers, 365
- PPP over ATM (PPPoA), 373–374

- PPP over Ethernet (PPPoE), 373–374
- PPPoA (PPP over ATM), 373–374
- PPPoE (PPP over Ethernet), 373–374
- PPS (packets per second), throughput, 39–40
- PRAM (parameter RAM), 190
- prefix, IPv6 address, 206
- PRI ISDN (Primary Rate Interface ISDN), 368
- Primary Rate Interface ISDN (PRI ISDN), 368
- principle of least privilege, authorization, 273
- priority queuing, 449
- privacy policy, security, 271
- private IP addresses, 195–196
 - disadvantages, 196
 - NAT (Network Address Translation), 197
- privileges, security, 271
- proactive management, 300
- Probe Configuration group, RMON2, 311
- procedures, security, 271
- process switching, 445
- projects
 - goals, documenting designs, 460
 - scope, documenting designs, 460–461
- propagation delays, 46
- Protected EAP (PEAP), 292
- Protocol-Independent Multicast (PIM), 432–433
 - dense mode, 433–434
 - sparse mode, 434–435
- protocols
 - analyzers, 81, 413
 - existing network, 89
 - traffic load, 106
 - broadcast frame, 113
 - burst-mode, 117
 - classful routing, 200
 - classless routing, 200
 - load sharing, 148
 - network management
 - CDP, 311
 - SNMP, 307–311
 - traffic estimations, 312
 - ping-pong, 117
 - routing, 234
 - AppleTalk, 252–254
 - characterizing, 234–243
 - comparisons, 261–263
 - IP, 243–252
 - multiple protocols, 257–261
 - NetWare, 254–257
 - traffic
 - efficiency, 114–116
 - load, 109–111
 - translation services, 375
- prototypes, testing designs, 405
 - documenting devices, 409–410
 - implementation, 412
 - objectives, 407–408
 - project timeline, 411
 - scope, 405–407
 - test scripts, 410–411
 - topology drawing, 409–410
 - types, 408–409
- provider-assigned address space, 188
- provider-independent address space, 187
- provisioning, 377
- proxy ARPs, 167
- proxy firewalls, 278
- PSPF (Publicly Secure Packet Forwarding), 295
- PSTN (Public Switched Telephone Network), 282
- public servers, securing Internet connections, 280–281
- Public Switched Telephone Network (PSTN), 282
- public/private keys, encryption, 275–276
- Publicly Secure Packet Forwarding (PSPF), 295
- PVCs (permanent virtual circuits), 336, 381
- PVST+ (Per VLAN Spanning Tree+), 162

Q

- QoS (Quality of Service), 119
 - ATM (Asynchronous Transfer Mode), 340
 - optimizing network design, 437–438
 - COPS protocol, 443
 - IEEE 802.1p, 443–444
 - IP precedence, 438–440
 - IPv6, 440
 - RSVP, 441–442
 - type-of-service, 438–440
 - requirements, 55
 - signaling protocols, 441
 - traffic requirements, 107, 119
 - ATM, 119–122

- Differentiated Services Working Group, 125–126
- documenting, 127
- GoS (grade of service), 126–127
- Integrated Services Working Group, 122–125
- Quality of Service. *See* QoS
- queuing
 - delays, 47
 - IOS tools, 448
 - CBWFQ (Class-Based Weighted Fair Queuing), 451–452
 - custom queuing, 450–451
 - FIFO, 448–449
 - LLQ (Low-Latency Queuing), 452–453
 - priority queuing, 449
 - WFQ (Weighted Fair Queuing), 451

R

- R reference point, ISDN, 370
- RADIUS (Remote Authentication Dial-In User Server), 282
- random early detection (RED), 453–454
- ranging slots, cable modems, 371
- Rapid Reconfiguration, STP (Spanning Tree Protocol), 155
- RARP (Reverse Address Resolution Protocol), 191
- RDP (Router Discovery Protocol), 168
- Real Time Protocol (RTP), design optimization, 436–437
- realtime bit rate (rt-VBR), 121
- receive window, traffic efficiency, 116
- reconnaissance attacks, 52–53
- record-route, 301
- RED (random early detection), 453–454
- redistribution, multiple routing protocols, 259–261
- redundancy
 - access points, WLANs, 161–162
 - availability, 30
 - LANs, 162–163
 - topologies, 145–146
 - backup paths, 146–147
 - load sharing, 147–148
- reference points, ISDN, 370
- reflection, RF signal problems, 74
- refraction, RF signal problem, 75
- regression testing, 409
- relative usage
 - bandwidth, 393
 - utilization, 80
- relay agents, routers, 192–193
- reliability
 - availability, 29
 - IGRP (Interior Gateway Routing Protocol), 245
- remote access, 18
 - security, 282–283
 - servers, 375
- Remote Authentication Dial-In User Server (RADIUS), 282
- remote monitoring (RMON), 90, 309
- remote-access
 - enterprise networks, 364
 - cable modem, 370–372
 - device selection, 374–377
 - DSL (Digital Subscriber Line), 372–374
 - ISDN (Integrate Services Digital Network), 367–370
 - PPP (Point-to-Point Protocol), 365–367
 - VPNs, 177
- remote-node services, 375
- rendezvous points, PIM (Protocol Independent Multicast), 434
- repeaters, 332, 341
- repudiation, security, 284
- Request For Comments (RFCs), 242
- request for proposal (RFPs), 457
- requirements
 - availability, 31–32
 - downtime costs, 34
 - five nines, 32–33
 - MTBF (mean time between failures), 34–35
 - MTTR (mean time to repair), 34–35
 - documenting
 - business goals, 461–462
 - technical goals, 462
- research, client business, 10–12
- reserved slots, cable modems, 371
- resiliency, 30
- resolver software, 216
- resource management cells, 121
- Resource Reservation Protocol. *See* RSVP

- response packets, SNMP, 308
- response times, 36
 - existing networks, 86–87
 - performance, 48–49
 - testing, 408
- return-on-investment (ROI), 467–468
- Reverse Address Resolution Protocol (RARP), 191
- RFCs (Request For Comments), 242
 - private IP addresses, 195
 - SNMP (Simple Network Management Protocol), 308
 - traffic flow, 97
- RFPs (request for proposal), 457–459
- rights, security, 271
- Rijndael algorithm, 293
- RIP (Routing Information Protocol), 243–244, 262, 280
 - classless routing, 200
 - traffic load, 111
- risks
 - security, 51–52, 268–269
 - denial-of-service (DoS) attacks, 53
 - reconnaissance attacks, 52–53
 - tolerance, 22
- RLQ (Root Link Query), 229
- RLQ Response, 229
- RM cells, 121
- RMON (remote monitoring), 309–311
- RMON MIB, 90
- Roads Home: Seven Pathways to Midlife Wisdom*, 300
- Robust Security Network (RSN), 293–294
- rogue access points, 287
- ROI (return-on-investment), 24, 467–468
- root bridge, STP (Spanning Tree Protocol), 153–154
- Root Guards, 154
- Root Link Query (RLQ), 229
- round trip time (RTT), 86, 301
- Router Discovery Protocol (RDP), 168
- routers, 341
 - advertisement packets, 168
 - DHCP relay agent, 192–193
 - existing network analysis, 87–88
 - LANs devices, 343
 - protocol forwarding, 193
 - solicitation packets, 168
 - summarization, 198
 - WANs, 387
- RouterTester (Agilent), 415
- routes
 - aggregation, 68
 - summarization, 68, 201
 - network example, 201–202
 - requirements, 202–203
 - tags, RIP (Routing Information Protocol), 244
- routing
 - CIDR (classless interdomain routing), 199
 - classful. *See* classful routing
 - classless. *See* classless routing
 - hierarchical, 198
 - IP multicast, 432
 - MOSPF (Multicast Open Shortest Path First), 432–433
 - PIM (Protocol Independent Multicast), 433–435
 - LANs design example, 355–356
 - protocol selection, 234
 - AppleTalk, 252–254
 - characterizing, 234–243
 - comparisons, 261–263
 - IP, 243–252
 - multiple protocols, 257–261
 - NetWare, 254–257
 - protocols, traffic load, 111
 - switches, protocol selection, 223–234
- Routing Information Protocol (RIP), 200, 243–244, 280
- Routing Table Maintenance Protocol (RTMP), AppleTalk, *See* RTMP
- RSN (Robust Security Network), 293–294
- RSPEC (service-request specification), 123
- RSVP (Resource Reservation Protocol), 122, 441
 - optimizing network design, 441–442
 - QoS implementation, 123
- RTMP (Routing Table Maintenance Protocol), 262
 - AppleTalk, 252–253
 - traffic load, 111
 - workstation-to-router redundancy, 166
- RTP (Real Time Protocol), design optimization, 436–437
- RTT (round trip time), 86, 301
- rt-VBR (realtime variable bit rate), 121
- runt frames, 42, 85

S

SAA (Service Assurance Agent), 91, 314

SACK (Selective ACK), 118

SAFE (Secure Architecture for Enterprises), 67

scalability

- 10-Mbps Ethernet, 330

- documenting, 462

- routing protocols, 241–243

- STP (Spanning Tree Protocol), 155

- technical goals, 27

- constraints, 29

- data access, 28–29

- expansion planning, 27–28

schedules, implementation plan, 466–467

scope

- network design, 16–18

- project scope documentation, 460–461

scripts, prototype testing, 410–411

SDH (Synchronous Digital Hierarchy), 363, 378

SDSL (symmetric DSL), 372

secret keys, 275

section layers, SONET, 380

Secure Architecture for Enterprises (SAFE), 67

Secure Sockets Layer (SSL), 51

security, 267–268

- accounting, 274

- assessment, 274

- authentication, 272–273

- authorization, 273

- cables, 322

- cards, 272

- compromising, 269

- documenting, 462

- encryption, 274–276

- firewalls, 277–278

- IDS, 278

- LANs design example, 358–359

- management, 54, 304

- modular

- design, 278–281

- network services, 284–285

- remote access, 282–283

- server farms, 285–286

- user services, 286–287

- VPNs, 283–284

- wireless networks, 287–295

network

- firewalls, 180–181

- physical, 180

- packet filters, 277

- physical, 272

- planning, 269–270

- policy

- development, 270–271

- naming recommendations, 212

- private IP addresses, 195

- procedures, 271

- risk assessment, 268–269

- technical goals, 49–50

- analyzing risks, 51–53

- identifying network assets, 50–51

- requirements, 53–54

security defense in depth principle, 278

security wheel, 268

segments, 18

Selective ACK (SACK), 118

send window, traffic efficiency, 116

sequence numbers, RTP (Real-Time Protocol), 436

Sequenced Packet Exchange (SPX), 368

serialization delays, 45–46

- design optimization, 435

- LFI (Link-Layer Fragmentation and

- Interleaving), 435–436

- RTP (Real Time Protocol), 436–437

Server Message Block (SMB), 100

server/server traffic flow, 102

server-based computing, 101

servers

- DNS, NetBT, 214–215

- documenting designs, 463

- farms, security design, 285–286

- identifier options, 192

- Klamath Paper Products WAN, 392

- LANs design example, 349

- Name, 164

- public, securing Internet connections, 280–281

- redundancy, 163–165

- WANs, 375

- WINS, NetBT, 214–215

Service Assurance Agent (SAA), 91, 314

Service Location Protocol (SLP), 256–257

service provider edge

- Enterprise Composite Network Model, 149

- topology, 178–180

- service providers, WANs, 387–389
- Service Set Identifier (SSID), 290
- service-level management tools, 413
- service-level-agreements (SLA), 388
- service-request specification (Rspec), 123
- services
 - documentation, 465
 - networks, security, 284–285
- Set Request packets, SNMP, 308
- set spantree priority command, 153
- set spantree root command, 154
- set spantree root secondary command, 154
- SGBP (Stack Group Bidding Protocol), 366
- shared keys, authentication, 289
- shielded copper cables, 323
- shielded twisted-pair cables (STPs), 323
- short-wavelength specification Ethernet, 334
- show buffers command, 87, 394
- show cdp neighbors detail command, 91, 311
- show environment command, 87
- show interface ethernet command, collision count, 43
- show interface serial command, collision count, 42
- show interfaces command, 87, 394
- show memory command, 87
- show port capabilities command, 233
- show processes command, 88, 394
- show processes cpu command, 355
- show running-config command, 88
- show startup-config command, 88
- signal strength, wireless utility analysis, 75
- signaling protocols, QoS, 441
- signatures, digital, 276
- Silicon Switch Processor (SSP), 446
- silicon switching, 446
- Simple Network Management Protocol. *See* SNMP
- simulation tools, network testing, 413
- single-mode fiber optic cables, 325
- site-local addresses, 207
- site-to-site VPNs, 176
- sizing
 - frames, 84
 - traffic flow, 98
 - windows, 116–117
- SLA (service-level-agreements), 388
- SLP (Service Location Protocol), 256–257
- Smartcards, 272
- SMB (Server Message Block), 100
- SNA
 - booting, 477
 - custom queuing, 451
- snapshot routing, 368
- Sniffer Network Analyzer, 89
- SNMP (Simple Network Management Protocol), 307–308
 - MIBs, 308–309
 - RMON, 309–311
 - securing network services, 285
- software, resolver, 216
- SONET (Synchronous Optical Network), 363, 379–380
- source-route bridging (SRB), 223
- source-route switching (SRS), 223
- source-route transparent bridging (SRT bridging), 223
- source-specific shortest-path trees, PIM (Protocol Independent Multicast), 435
- Spanning Tree Protocol (STP), campus network topology, 151
 - convergence, 151–153
 - root bridge, 153–154
 - scaling, 155
 - topology change process, 154
- spantree-template 1 priority command, 153
- sparse modes, PIM (Protocol Independent Multicast), 433–435
- split horizon
 - Frame Relay, 383
 - hub-and-spoke topology, 382
 - technique, distance-vector routing protocols, 236
- Spohn, Darren L., *ATM Theory and Applications*, 108
- spoofing, 368
- SPX (Sequenced Packet Exchange), 368
- SRB (source-route bridging), 223
- SRS (source-route switching), 223
- SRT bridging (source-route transparent bridging), 223
- SSID (Service Set Identifier), 290
- SSL (Secure Sockets Layer), 51
- SSP (Silicon Switch Processor), 446
- SSRC fields, synchronization source fields), 436
- Stack Group Bidding Protocol (SGBP), 366

- stack groups, 366
- staffing, business constraints (clients), 23–24
- Stallings, William, *Local and Metropolitan Area Networks*, 106
- standard deviation, 85
- standby tracking, 169
- star topologies, cabling, 320
- startup ranges, 190
- stateful autoconfiguration model, 193
- stateful firewalls, 278
- stateless autoconfiguration, 193
- static packet-filter firewalls, 278
- static routing protocols, *versus* dynamic routing protocols, 240–241
- Statistics group, RMON, 309
- store-and-forward devices, 225
- storms, broadcasts, 112
- STP (Spanning Tree Protocol), campus network topology, 151
 - convergence, 151–153
 - root bridge, 153–154
 - scaling, 155
 - topology change process, 154
- STPs (shielded twisted-pair cables), 323
- stress, prototypes tests, 408
- structured model for addressing, network layers, 186–187
- STS-1 (Synchronous Transport Signal level 1), 378
- stub networks, 240
- subinterfaces, WANs frame relay, 382–383
- submodules, campus network topology, 150
- subnets, 200
 - discontiguous, 69, 203–204
 - masks, RIP (Routing Information Protocol), 244
 - route summarization, 201
 - VLSM (variable-length subnet masking), 204–205
- summaries, Executive Summaries, 460, 468
- summarization, 198, 201
 - network example, 201–202
 - requirements, 202–203
- supernetting, 68
- SVCs (switched virtual circuits), 381
- switched virtual circuits (SVCs), 381
- switches, 341
 - accuracy, 82–83
 - existing networks, analyzing, 87–88
 - LANs devices, 342–343
 - NetBEUI, 212
 - packets, 444–445
 - CEF (Cisco Express Forwarding), 447–448
 - classic methods, 445–446
 - NetFlow switching, 446–447
 - protocol selection, 223
 - spanning-tree algorithm, 227–231
 - transparent bridging, 224–225
 - transparent switching, 225–227
 - VLANs, 231–234
 - STP (Spanning Tree Protocol), 151
 - convergence, 151–153
 - root bridge, 153–154
 - scaling, 155
 - topology change process, 154
- switching fabric, 225
- switching tables, 224
- symmetric DSL (SDSL), 372
- symmetric keys, 275
- symmetric traffic, peer-to-peer, 101
- synchronization source fields (SSRC fields), 436
- synchronized porpoise dive, 453
- Synchronous Digital Hierarchy (SDH), 363, 378
- synchronous distance learning, 391
- Synchronous Optical Network (SONET), 363, 379–380
- Synchronous Transport Signal level 1 (STS-1), 378
- system development life cycles, 7–8

T

- T reference point, ISDN, 370
- TACACS (Terminal Access Controller Access Control System), 284
- Tag Protocol Identifier (TPID), 232
- tags
 - route, RIP (Routing Information Protocol), 244
 - VLANs, 159
- TAs (terminal adapters), ISDN, 369
- TCP (Transmission Control Protocol)
 - congestion control, 384
 - flow control, 117
 - traffic load, 109

TCP/IP

- booting, 474–475
- NetBT, 213
 - broadcasts, 213
 - DNS, 214–215
 - lmhosts files, 214
 - WINS, 214–215
- tcpdump utility, 89
- TDR (time-domain reflectometer), 71
- technical goals, 27
 - adaptability, 55–56
 - affordability, 56–57
 - availability, 29–30
 - disaster recovery, 30–31
 - requirements, 31–35
 - checklist, 59
 - design tradeoffs, 58
 - documenting designs, 462
 - LANs design example, 346
 - manageability, 54
 - performance, 35
 - accuracy, 42–43
 - definitions, 35–36
 - delay, 45–48
 - efficiency, 43–45
 - optimum utilization, 36–38
 - response time, 48–49
 - throughput, 39–41
 - scalability, 27
 - constraints, 29
 - data access, 28–29
 - expansion planning, 27–28
 - security, 49–50
 - analyzing risks, 51–53
 - identifying network assets, 50–51
 - requirements, 53–54
 - usability, 55
- technologies, management designs, 313
 - NetFlow, 313–314
 - SAA (Service Assurance Agent), 314
- Telnet protocol, delay sensitivity, 45
- Temporal Key Integrity Protocol (TKIP), 293
- Terminal Access Controller Access Control System (TACACS), 284
- terminal adapters (TAs), ISDN, 369
- terminal services, 375
- terminal/host traffic flow, 99

testing

- backup paths, 147
- designs, 403–404
 - goals, 403
 - independent test labs, 404–405
 - prototype, 405–412
 - tools, 412–416
 - Umqua Systems, Inc. example, 416–427
- documenting designs, 465
- existing networks, 76
- TFTP (Trivial File Transfer Protocol), 280
- thick Ethernet cables (10BASE5), 323
- thin client traffic flow, 100–101
- thin Ethernet cables (10Base2), 323
- threats, security, 51–52
 - denial-of-service (DoS) attacks, 53
 - reconnaissance attacks, 52–53
- three-layer hierarchical topologies, 141
 - access layer, 143
 - core layer, 142
 - distribution layer, 142–143
- three-part firewall topology, 181
- throughput, 36, 39
 - application layer, 40–41
 - internetwork devices, 39–40
 - testing, 408
- ticks, IPX RIP routing metric, 255
- time stamps, RTP (Real-Time Protocol), 436
- time-domain reflectometer (TDR), 71
- timeframes
 - business networks, 24
 - uptime requirements, 32
- timelines, documenting prototype tests, 411
- time-to-live (TTL) field, 237, 302
- TKIP (Temporal Key Integrity Protocol), 293
- token buckets, 125
- token passing, performance, 37
- Token Ring networks, switches, 223
- Tolly Group, 404
- tools
 - characterizing existing networks
 - Cisco tools, 91–92
 - monitoring, 89–90
 - protocol analyzer, 89
 - remote monitoring, 90
 - mapping, 64

- network design tests
 - Agilent RouterTester, 415
 - IPM (CiscoWorks Internetwork Performance Monitor), 414
 - NetIQ, 415
 - NetPredictor, 415–416
 - NPAT, 414
 - OPNET technologies, 415
 - types, 412–414
- network management, 312–314
- top-down network design, methodology, 5–6
 - PDIOO life cycle, 9–10
 - structured process, 7
 - system development life cycle, 7–8
- topologies, 133
 - cabling, 320
 - buildings, 321
 - campus, 322–323
 - campus network, 150
 - redundant LANs, 162–163
 - server redundancy, 163–165
 - STP (Spanning Tree Protocol), 151–155
 - VLANs, 156–159
 - WLANs, 160–162
 - workstation-to-router redundancy, 165–170
 - documenting
 - designs, 464
 - prototype testing, 409–410
 - enterprise edge, 170
 - multihoming, 171–174
 - redundant WANs, 170–171
 - service provider, 178–180
 - VPNs (virtual private networks), 175–177
 - full-mesh, 138–140
 - hierarchical, 133–134
 - guidelines, 143–145
 - reasons for use, 135–140
 - three-layer, 141–143
 - hub-and-spoke, 140, 382–383
 - Klamath Paper Products WAN, 394–396
 - loop, 137
 - mapping, 66–67
 - modular, 135, 148–149
 - redundant, 145–146
 - backup paths, 146–147
 - load sharing, 147–148
 - security, 180–181. *See also* security
 - tables, EIGRP (Enhanced Interior Gateway Routing Protocol), 247
 - three-part firewall, 181
 - totally stubby areas, 249
 - TPID (Tag Protocol Identifier), 232
 - traceroute command, 302
 - tradeoffs, design, 58
 - traffic
 - capacity planning, 28
 - characterizing, 105
 - application usage, 107–108
 - broadcast frame, 112–113
 - calculating, 106–107
 - checklist, 128
 - client/server, 99–100
 - distributed computing, 102–103
 - documenting, 104–105
 - efficiency, 113–118
 - existing networks, 97–98
 - multicast frame, 112–113
 - peer-to-peer, 101–102
 - QoS requirements, 119–127
 - refining application usage, 108–110
 - routing protocols, 111
 - server/server, 102
 - terminal/host, 99
 - thin client, 100–101
 - VoIP networks, 103–104
 - class fields, 440
 - flow, 95–96
 - IOS, shaping, 454
 - Klamath Paper Products WAN, 392–394
 - LANs, IEEE 802.1p, 443–444
 - load (offered load), 106
 - management design, 312
 - specification (Tspec), 123
 - Umqua Systems, Inc. example
 - DS-1 circuit, 423–424
 - FDDI backbone, 419–423
 - Wandering Valley Community College campus LAN, 352–354
 - WANs frame relay, 384–385
 - transit networks, 174
 - translation, IPv4 to IPv6 addresses, 209
 - translational bridging, 223
 - Transmission Control Protocol (TCP), congestion control, 384

- transmission delays, 435
- transparent bridges, spanning-tree algorithm, 227
 - BackboneFast, 228–229
 - Loop Guard, 230–231
 - PortFast, 227–228
 - UDLD (Unidirectional Link Detection), 230
 - UplinkFast, 228–229
- transparent bridging, 223–225
- transparent switching, 225
 - multilayers, 226–227
 - OSI layers, 225–226
- Trap packets, SNMP, 308
- triggered updates, IGRP (Interior Gateway Routing Protocol), 245
- Trivial File Transfer Protocol (TFTP), 280
- troubleshooting
 - count-to-infinity problems, 237
 - fault management, 302–303
- Trunk Frame Relay fragmentation, 436
- trunk links, 159
- trunk networks, Gigabit Ethernet, 333
- TSPEC (traffic specification), 123
- TTL (time-to-live) field, 302
- tunneling, IPv4 to IPv6 addresses, 209
- twinax cables, 323
- twin-axial cables (twinax), 323
- type-of-service, QoS, 438–439
 - DS (Differentiated Services) field, 440
 - field, 439

U

- U reference point, ISDN, 369–370
- UBR (unspecified bit rate), 121
- UDLD (Unidirectional Link Detection), 230
- UDP (User Datagram Protocol), 302
 - flow control, 117
 - traceroute packet, 302
- umbrella NMSs, 306
- Umqua Systems, Inc. design testing example
 - background information, 416
 - conclusions, 426–427
 - current network, 418
 - DS-1 circuit, 423–424
 - FDDI backbone traffic, 419–423
 - goals, 416–417

- methods, 419
- network applications, 417
- Oracle user data, 424–425
- unicast addresses, IPv6, 206
 - aggregatable global, 207–208
 - IPv4 in IPv6, 208–209
 - link-local, 207
 - site-local, 207
- Unidirectional Link Detection (UDLD), 230
- UNIX, RIP daemon, 167
- unshielded copper cables, 323
- unshielded twisted-pair cables (UTP cables), 320, 324
- unspecified bit rate (UBR), 121
- UplinkFast, 228–229
- upstream bandwidth, cable modems, 371
- uptime
 - availability, 31
 - reliability, 30
- usability
 - documenting, 462
 - technical goals, 55
- User Datagram Protocol. *See* UDP
- User History Collection group, RMON2, 311
- users
 - communities, 96
 - documenting designs, 463
 - Klamath Paper Products WAN, 391
 - LANs design example, 347–348
 - remote access device, 374–375
 - securing services, 286–287
 - traffic flow, 95–96
- utilization, 36
 - existing networks, 78–81
 - performance, 36–38
- UTP cables (unshielded twisted-pair cables), 320, 324

V

- variable-length subnet masking (VLSM), 198, 204
- variance
 - IGRP (Interior Gateway Routing Protocol), 245
 - load sharing, 148
 - measurements, 86
- VDSL (Very-High-Bit-Rate DSL), 373

version logging, 303
 vertical wiring, 70–72
 Very-High-Bit-Rate DSL (VDSL), 373
 videoconferencing, traffic, 102
 virtual private networking. *See* VPNs
 Virtual Router Redundancy Protocol (VRRP), 168
 virtual routers, 168
 Vivinet Assessor (NetIQ), 415
 VLAN Trunking Protocol (VTP), 233–234, 304
 VLANs
 campus network topology, 156–159
 hierarchical topology distribution layer, 142
 limiting broadcast domains, 112
 switches, 223
 switching protocols, 231
 DISL (Dynamic Inter-Switch Link),
 231–232
 IEEE 802.1Q document, 232–233
 ISL (Inter-Switch Link), 231
 VTP (VLAN Trunk Protocol), 233–234
 VLSM (variable-length subnet masking), 198,
 204–205
 voice networks, GoS (grade of service)
 requirements, 126–127
 Voice over IP networks (VoIP networks), 103–104
 voice-grade cabling, 324
 VoIP networks (Voice over IP networks), 103–104
 VPNs (virtual private networks), 14, 175
 concentrators, 376–377
 encryption, 275
 enterprise edge topology, 175
 remote-access, 177
 site-to-site, 176
 security, 283–284
 software, securing wireless networks, 294–295
 VRRP (Virtual Router Redundancy Protocol), 168
 VTP (VLAN Trunking Protocol), 233–234, 304

W

WAN Survival Guide, 174
 Wandering Valley Community College (WVCC),
 LANs design example
 background information, 345
 business goals, 345–346
 current network, 349–355

data stores, 349
 network applications, 347
 redesign, 355–359
 technical goals, 346
 user communities, 347–348
 WANDL, Inc. Network-Planning and Analysis Tool
 (NPAT), 414
 WANs (wide area networks), 18, 37, 363–364, 377
 accuracy goals, 42
 ATM (Asynchronous Transfer Mode), 385–387
 bandwidth, 377–378
 cable modem, 370–372
 design example
 background information, 389–390
 business goals, 390
 current network, 392–394
 data stores, 392
 network applications, 390–391
 technical goals, 390
 topology, 394–396
 user communities, 391
 device selection
 central sites, 375–377
 remote users, 374–375
 DSL (Digital Subscriber Line), 372
 ADSL PPP implementation, 373–374
 supported services, 373
 flat topologies, 136–137
 Frame Relay, 381–382
 ATM (Asynchronous Transfer Mode), 385
 congestion, 383–384
 hub-and-spoke topology, 382–383
 split horizon, 383
 subinterfaces, 382–383
 traffic control, 384–385
 ISDNs (Integrate Services Digital Networks),
 367–370
 leased lines, 379
 operation affordability, 56
 optimum utilization, 37
 PPP (Point-to-Point Protocol), 365
 CHAP (Challenge Handshake
 Authentication Protocol), 366–367
 MPPP (Multilink PPP), 365–366
 PAP (Password Authentication Protocol),
 366–367
 redundant, 170–171

- routers, 387
 - servers, 375
 - service providers, 387–389
 - SONET (Synchronous Optical Network), 379–380
- wave-division multiplexing (WDM), 324, 385
- WDM (wave-division multiplexing), 324, 385
- websites
 - Frame Relay Forum, 385
 - Zeroconf, 194
- Weighted Fair Queuing (WFQ), 449–451
- Weighted Random Early Detection (WRED), 453–454
- Welcherm, Dr. Peter, fur-ball networks, 135
- WEP keys (Wired Equivalent Privacy keys), 289
- WFQ (Weighted Fair Queuing), 449–451
- wide area networks. *See* WANs
- wide wavelength-division multiplexing (WWDM), 335
- Wi-Fi Protected Access (WPA), 293–294
- WildPackets AiroPeek analyzer, 75
- windowing, traffic efficiency, 116–118
- windows, sizing, 116–117
- WINS
 - booting, 476
 - NetBT, 214–215
- Wired Equivalent Privacy keys (WEP keys), 289
- wireless
 - access points, LANs devices, 343–344
 - cells, 160
 - networks
 - LANs design example, 356–358
 - security, 287–295
 - site surveys, 74–76
- wiring existing networks, 70–76
- WLANs
 - campus network topology, 160
 - access points, 160–161
 - multiple access points, 161
 - redundant access points, 161–162
 - LANs redesign example, 356–358
- work-area wiring, 70–72
- workstations, initialization, 109–110

- workstation-to-router redundancy, 165–166
 - AppleTalk, 166
 - IP, 167–168
 - GLBP (Gateway Load Balancing Protocol), 170
 - HSRP (Hot Standby Router Protocol), 168–169
 - Novell NetWare, 167
- World Wide Web, public server access, 280
- WPA (Wi-Fi Protected Access), 293–294
- WRED (Weighted Random Early Detection), 453–454
- WWDM (wide wavelength-division multiplexing), 335

X-Y-Z

- X Windows, 100
- XOR operation, EtherChannel, 338
- your address (yiaddr) fields, 192
- Zeroconf (Zero Configuration Networking), 194–195
- ZIP (Zone Information Protocol), 190, 252–253
- Zone Information Protocol (ZIP), 190, 252–253
- zone information tables, 253

Your first-step to networking starts here

Are you new to the world of networking? Whether you are beginning your networking career or simply need a better understanding of technology to gain more meaningful discussions with networking experts, Cisco Press First-Step books are right for you.

- **No experience required**
- **Includes clear and easily understood explanations**
- **Makes learning easy**

Check out each of these First-Step books that cover key networking topics:



- **Computer Networking First-Step**
ISBN: 1-58720-101-1



- **Network Security First-Step**
ISBN: 1-58720-099-6



- **Routing First-Step**
ISBN: 1-58720-122-4



- **TCP/IP First-Step**
ISBN: 1-58720-108-9
- **Wireless Networks First-Step**
ISBN: 1-58720-111-9

Visit **www.ciscopress.com/firststep** to learn more.


What's your next step?

Eager to dig deeper into networking technology? Cisco Press has the books that will help you move to the next level. Learn more at **www.ciscopress.com/series**.

DISCUSS

**NETWORKING PRODUCTS AND
TECHNOLOGIES WITH CISCO
EXPERTS AND NETWORKING
PROFESSIONALS WORLDWIDE**

**VISIT NETWORKING PROFESSIONALS
A CISCO ONLINE COMMUNITY
WWW.CISCO.COM/GO/DISCUSS**

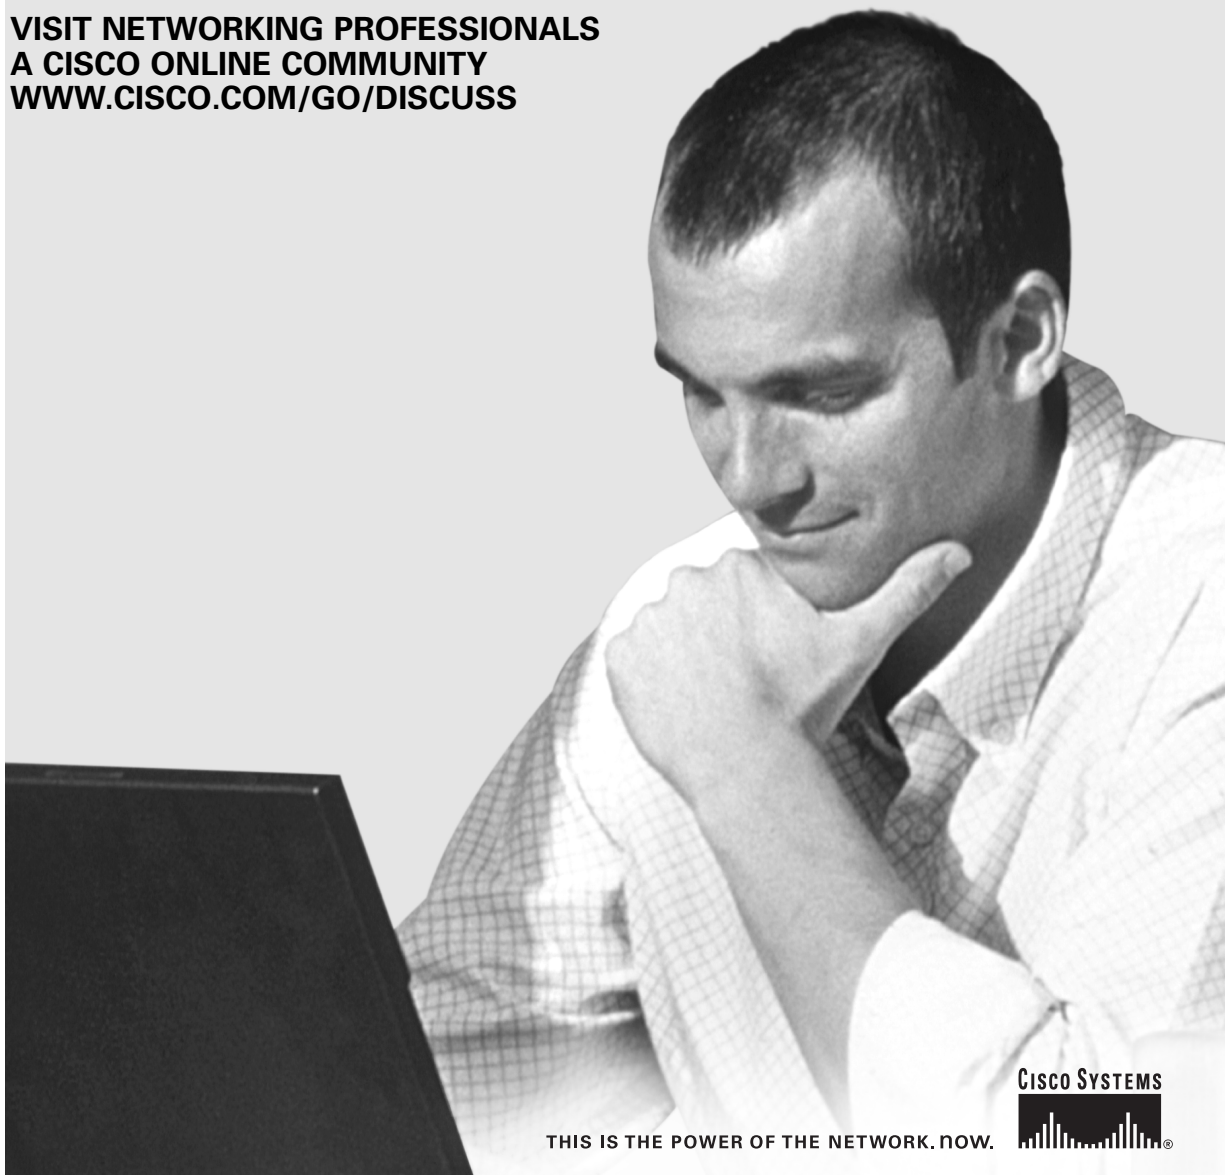

CISCO SYSTEMS



THIS IS THE POWER OF THE NETWORK. NOW.

SAVE UP TO 25%

Become a member and save at **ciscopress.com**!



Complete a **User Profile** at **ciscopress.com** today to become a member and benefit from discounts of up to **25% on every purchase** at **ciscopress.com**. You can also sign up to get your first **30 days FREE on InformIT Safari Bookshelf** and **preview Cisco Press content**. With Safari Bookshelf, you can access Cisco Press books online and build your own customized, searchable IT library. And don't forget to subscribe to the monthly Cisco Press newsletter.

Visit **www.ciscopress.com/register** to sign up and start saving today!

The profile information we collect is used in aggregate to provide us with better insight into your technology interests and to create a better user experience for you. You must be logged into **ciscopress.com** to receive your discount. Discount is on Cisco Press products only; shipping and handling are not included.



Wouldn't it be great
if the world's leading technical
publishers joined forces to deliver
their best tech books in a common
digital reference platform?

They have. Introducing
InformIT Online Books
powered by Safari.

■ **Specific answers to specific questions.**

InformIT Online Books' powerful search engine gives you relevance-ranked results in a matter of seconds.

■ **Immediate results.**

With InformIT Online Books, you can select the book you want and view the chapter or section you need immediately.

■ **Cut, paste and annotate.**

Paste code to save time and eliminate typographical errors. Make notes on the material you find useful and choose whether or not to share them with your work group.

■ **Customized for your enterprise.**

Customize a library for you, your department or your entire organization. You only pay for what you need.

Get your first 14 days FREE!

InformIT Online Books is offering its members a 10 book subscription risk-free for 14 days. Visit <http://www.informit.com/onlinebooks/cp> for details.

POWERED BY
Safari
TECH BOOKS ONLINE®

informIT
Online Books

informit.com/onlinebooks/cp


3 STEPS TO LEARNING

STEP 1



First-Step

STEP 2

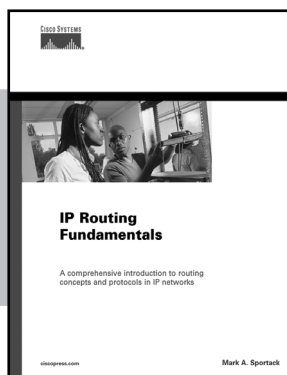

Fundamentals

STEP 3




Networking Technology Guides

STEP 1 First-Step—Benefit from easy-to-grasp explanations.
No experience required!

STEP 2 Fundamentals—Understand the purpose, application, and management of technology.

STEP 3 Networking Technology Guides—Gain the knowledge to master the challenge of the network.



NETWORK BUSINESS SERIES

The Network Business series helps professionals tackle the business issues surrounding the network. Whether you are a seasoned IT professional or a business manager with minimal technical expertise, this series will help you understand the business case for technologies.


Justify Your Network Investment.

Look for Cisco Press titles at your favorite bookseller today.

Visit www.ciscopress.com/series for details on each of these book series.



Cisco Press Solutions




Designing Network Security, Second Edition

Merike Kaero

1-58705-117-6 • **Available Now**

Designing Network Security, Second Edition, is a practical guide designed to help you understand the fundamentals of securing your corporate network infrastructure. This book takes a comprehensive look at underlying security technologies, the process of creating a security policy, and the practical requirements necessary to implement a corporate security policy.

You will gain a thorough understanding of basic cryptography, the most widely deployed security technologies, and key emerging security technologies. You will be able to guide the architecture and implementation of a security policy for a corporate environment by knowing possible threats and vulnerabilities and understanding the steps required to perform a risk management assessment. Through the use of specific configuration examples, you will learn about the features required in network infrastructure equipment to implement the given security policy, including securing the internal corporate infrastructure, Internet access, and the remote access environment.




Optical Network Design and Implementation

Vivek Alwayn

1-58705-105-2 • **Available Now**

Multiservice optical networking has multiple applications in service provider and enterprise environments. To help you make the most of these applications, *Optical Network Design and Implementation* provides a complete reference of technology solutions for next-generation optical networks. The book explains the differences among various MAN technologies, getting you up to speed on the solutions you need to use.

Optical Network Design and Implementation contains a broad range of technical details on multiservice optical networking and covers optical networking theory, design, and configuration by providing informative text, illustrations, and examples. It can be used as a reference for anyone designing, implementing, or supporting an optical network. Even if you're not using Cisco ONS equipment, this book can increase your awareness and understanding of optical technologies and provide you with detailed design concepts and rules for building highly scalable multiservice optical networks.



CCDA/CCDP Flash Cards and Exam Practice Pack

Anthony Sequeira and Kevin Wallace


1-58720-117-8 • **Available Now**

CCDA/CCDP Flash Cards and Exam Practice Pack includes the following three tried-and-true methods of late-stage test preparation:

- More than 350 flash cards. Test your understanding of CCDA and CCDP concepts with flash cards in print and electronic formats. The electronic version is PC-, Palm OS-, and Pocket PC-compatible, allowing for supreme flexibility. Shuffle the electronic cards, work from preset groups of cards, or create and save your own challenging set for focused review.
- 550 practice exam questions. Verify your knowledge with this robust exam engine. Test your proficiency in two modes—study mode and practice mode—and identify areas of weakness so you can concentrate on specific topics for which you need the most help.
- 55+ quick reference sheets. Review crucial CCDA and CCDP exam objectives with these comprehensive reference sheets. Succinct text overviews of complex concepts are supported with detailed diagrams to provide a valuable late-stage review of all that must be mastered for exam success.

Are you ready to take your CCDA DESGN or CCDP ARCH exam? You've learned the concepts, you have the experience to put them into real-world use, and now you want to practice, practice, practice until exam time. *CCDA/CCDP Flash Cards and Exam Practice Pack* gives you three methods of proven, late-stage CCDA and CCDP exam preparation in one package.

CCIE Security



BGP Design and Implementation

Randy Zhang and Micah Bartell

1-58705-109-5 • **Available Now**

BGP Design and Implementation focuses on real-world problems and provides not only design solutions, but also the background on why they are appropriate and a practical overview of how they apply in a top-down design. The BGP protocol is used in both service provider and enterprise networks. The design goals of these two groups are different, leading to different architectures in each environment. *BGP Design and Implementation* breaks out the separate goals, and resulting solutions for each group to assist the reader in further understanding of different solution strategies.

This book starts by identifying key features and functionality in BGP. It then delves into the topics of performance tuning, routing policy development, and architectural scalability. It progresses by examining the challenges for both the service provider and enterprise customers, and provides practical guidelines and a design framework for each. *BGP Design and Implementation* finishes up by closely looking at the more recent extensions to BGP through Multi-Protocol BGP for MPLS-VPN, IP Multicast, IPv6, and CLNS.