

CCNA Routing and Switching

Portable Command Guide

Third Edition

All the CCNA Routing and Switching
commands in one compact, portable resource

ciscopress.com

Scott Empson

FREE SAMPLE CHAPTER



SHARE WITH OTHERS

Steps to Configuring a Router

1. Create an IP plan as per your diagram.
 - a. Subnetting
 - b. VLSM
2. Cable your equipment as per your diagram.
3. Establish a basic router configuration.
 - a. Host names
 - b. Passwords:
 - i. Secret
 - ii. Console
 - iii. Terminal—vty
 - iv. Auxiliary
 - c. Turn off DNS so spelling mistakes will not slow you down
 - d. Banners: login or MOTD
4. Configure your interfaces.
 - a. Addresses and masks: IPv4/IPv6
 - b. Clock rates (for serial DCE interfaces)
 - c. Descriptions
5. Create IP host name tables for remote access.
6. Configure IPv4 routing.
 - a. Static
 - b. Default
 - c. Dynamic—Pick the routing protocol that best suits your needs:
 - i. OSPF
 - ii. EIGRP
7. Configure IPv6 routing.
 - a. Static
 - b. Default
 - c. Dynamic—Pick the routing protocol that best suits your needs:
 - i. OSPF
 - ii. EIGRP
8. Configure access control lists (ACL):
 - a. Standard
 - b. Extended
 - c. Named
9. Change the WAN encapsulation type.
 - a. PPP (authentication: CHAP)
 - b. HDLC (if returning to default)
10. Apply advanced IP configuration topics.
 - a. NAT/PAT
 - b. DHCP
11. Save your configuration.
 - a. Locally
 - b. Remote

First part of the table
will be placed on the
last page of the book.

CCNA Routing and Switching Portable Command Guide

Third Edition

Scott Empson

Cisco Press

800 East 96th Street
Indianapolis, IN 46240

CCNA Routing and Switching Portable Command Guide

Third Edition

Scott Empson

Copyright© 2013 Cisco Systems, Inc.

Published by:

Cisco Press

800 East 96th Street

Indianapolis, IN 46240 USA

All rights reserved. No part of this book may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without written permission from the publisher, except for the inclusion of brief quotations in a review.

ISBN-13: 978-1-58720-430-2

ISBN-10: 1-58720-430-4

Library of Congress Control Number: 2013939799

Printed in the United States of America 1 2 3 4 5 6 7 8 9 0

Fourth Printing: May 2015

Trademark Acknowledgments

All terms mentioned in this book that are known to be trademarks or service marks have been appropriately capitalized. Cisco Press or Cisco Systems, Inc. cannot attest to the accuracy of this information. Use of a term in this book should not be regarded as affecting the validity of any trademark or service mark.

Warning and Disclaimer

This book is designed to provide information about the Certified Cisco Networking Associate (CCNA) Routing and Switching exam and the commands needed at this level of network administration. Every effort has been made to make this book as complete and as accurate as possible, but no warranty or fitness is implied.

The information is provided on an “as is” basis. The authors, Cisco Press, and Cisco Systems, Inc., shall have neither liability nor responsibility to any person or entity with respect to any loss or damages arising from the information contained in this book or from the use of the discs or programs that may accompany it.

The opinions expressed in this book belong to the author and are not necessarily those of Cisco Systems, Inc.

Corporate and Government Sales

The publisher offers excellent discounts on this book when ordered in quantity for bulk purchases or special sales, which may include electronic versions and/or custom covers and content particular to your business, training goals, marketing focus, and branding interests. For more information, please contact:

U.S. Corporate and Government Sales
1-800-382-3419
corpsales@pearsontechgroup.com

For sales outside of the U.S. please contact:

International Sales
international@pearsoned.com

Feedback Information

At Cisco Press, our goal is to create in-depth technical books of the highest quality and value. Each book is crafted with care and precision, undergoing rigorous development that involves the unique expertise of members from the professional technical community.

Readers' feedback is a natural continuation of this process. If you have any comments regarding how we could improve the quality of this book, or otherwise alter it to better suit your needs, you can contact us through e-mail at feedback@ciscopress.com. Please make sure to include the book title and ISBN in your message.

We greatly appreciate your assistance.

Publisher	Paul Boger
Business Operation Manager, Cisco Press	Jan Cornelssen
Associate Publisher:	Dave Dusthimer
Executive Editor	Mary Beth Ray
Senior Development Editor	Christopher A. Cleveland
Managing Editor	Sandra Schroeder
Copy Editor	Keith Cline
Project Editor	Mandie Frank
Technical Editor	Elan Beer
Editorial Assistant	Vanessa Evans
Proofreader	Debbie Williams
Cover Designer	Mark Shirar
Composition	Trina Wurst



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV
Amsterdam, The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

CCDE, CCENT, Cisco Eos, Cisco HealthPresence, the Cisco logo, Cisco Lumin, Cisco Nexus, Cisco StadiumVision, Cisco TelePresence, Cisco WebEx, DCE, and Welcome to the Human Network are trademarks; Changing the Way We Work, Live, Play, and Learn and Cisco Store are service marks; and Access Registrar, Aironet, AsyncOS, Bringing the Meeting To You, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, CCVP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Collaboration Without Limitation, EtherFast, EtherSwitch, Event Center, Fast Step, Follow Me Browsing, FormShare, Gigaset, HomeLink, Internet Quotient, IOS, iPhone, iQuick Study, IronPort, the IronPort logo, LightStream, Linksys, MediaTone, MeetingPlace, MeetingPlace Chime Sound, MGX, Networkers, Networking Academy, Network Registrar, PCNow, PIX, PowerPanel, ProConnect, ScriptShare, SenderBase, SMARTnet, Spectrum Expert, StackWise, The Fastest Way to Increase Your Internet Quotient, TransPath, WebEx, and the WebEx logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0812R)

About the Author

Scott Empson is the chair of the Bachelor of Applied Information Systems Technology degree program at the Northern Alberta Institute of Technology in Edmonton, Alberta, Canada, where he teaches Cisco routing, switching, network design, and leadership courses in a variety of different programs (certificate, diploma, and applied degree) at the postsecondary level. Scott is also the program coordinator of the Cisco Networking Academy Program at NAIT, an Area Support Centre for the province of Alberta. He has a Masters of Education degree along with three undergraduate degrees: a Bachelor of Arts, with a major in English; a Bachelor of Education, again with a major in English/Language Arts; and a Bachelor of Applied Information Systems Technology, with a major in Network Management. He currently holds several industry certifications, including CCNP, CCDP, CCAI, CIEH and Network+. Before instructing at NAIT, he was a junior/senior high school English/language arts/computer science teacher at different schools throughout Northern Alberta. Scott lives in Edmonton, Alberta, with his wife, Trina, and two children, Zachariah and Shaelyn.

About the Technical Reviewer

Elan Beer, CCIE No. 1837, is a senior consultant and Cisco instructor specializing in data center architecture and multiprotocol network design. For the past 25 years, Elan has designed networks and trained thousands of industry experts in data center architecture, routing, and switching. Elan has been instrumental in large-scale professional service efforts designing and troubleshooting internetworks, performing data center and network audits, and assisting clients with their short- and long-term design objectives. Elan has a global perspective of network architectures through his international clientele. Elan has used his expertise to design and troubleshoot data centers and internetworks in Malaysia, North America, Europe, Australia, Africa, China, and the Middle East. Most recently, Elan has been focused on data center design, configuration, troubleshooting, and service provider technologies. In 1993, Elan was among the first to obtain the Cisco Certified System Instructor (CCSI) certification, and in 1996, Elan was among the first to attain Cisco System's highest technical certification, the Cisco Certified Internetworking Expert. Since then, Elan has been involved in numerous large-scale data center and telecommunications networking projects worldwide.

Dedications

As always, this book is dedicated to Trina, Zach, and Shae.

Acknowledgments

Anyone who has ever had anything to do with the publishing industry knows that it takes many, many people to create a book. It may be my name on the cover, but there is no way that I can take credit for all that occurred to get this book from idea to publication.

Therefore, I must thank:

The team at Cisco Press. Once again, you amaze me with your professionalism and the ability to make me look good. Mary Beth, Chris, Mandie: Thank you for your continued support and belief in my little engineering journal.

To my technical reviewer, Elan: Thanks for keeping me on track and making sure that what I wrote was correct and relevant.

Contents at a Glance

Introduction xx

Part I TCP/IP v4

- CHAPTER 1 How to Subnet 1
- CHAPTER 2 VLSM 15
- CHAPTER 3 Route Summarization 25

Part II Introduction to Cisco Devices

- CHAPTER 4 Cables and Connections 31
- CHAPTER 5 The Command Line Interface 37

Part III Configuring a Router

- CHAPTER 6 Configuring a Single Cisco Router 45

Part IV Routing

- CHAPTER 7 Static Routing 57
- CHAPTER 8 EIGRP 63
- CHAPTER 9 Single-Area OSPF 73
- CHAPTER 10 Multi-Area OSPF 83

Part V Switching

- CHAPTER 11 Configuring a Switch 91
- CHAPTER 12 VLANs 101
- CHAPTER 13 VLAN Trunking Protocol and Inter-VLAN Communication 107
- CHAPTER 14 Spanning Tree Protocol and EtherChannel 121

Part VI Layer 3 Redundancy

- CHAPTER 15 HSRP and GLBP 137

Part VII IPv6

- CHAPTER 16 IPv6 153
- CHAPTER 17 OSPFv3 163
- CHAPTER 18 EIGRP for IPv6 171

Part VIII Network Administration and Troubleshooting

- CHAPTER 19** Backing Up and Restoring Cisco IOS Software and Configurations 177
- CHAPTER 20** Password-Recovery Procedures and the Configuration Register 187
- CHAPTER 21** Cisco Discovery Protocol (CDP) 193
- CHAPTER 22** Remote Connectivity Using Telnet or SSH 195
- CHAPTER 23** Verifying End-to-End Connectivity 199
- CHAPTER 24** Configuring Network Management Protocols 203
- CHAPTER 25** Basic Troubleshooting 207
- CHAPTER 26** Cisco IOS Licensing 213

Part IX Managing IP Services

- CHAPTER 27** Network Address Translation 219
- CHAPTER 28** Dynamic Host Configuration Protocol (DHCP) 227

Part X WANs

- CHAPTER 29** Configuring Serial Encapsulation: HDLC and PPP 233
- CHAPTER 30** Establishing WAN Connectivity Using Frame Relay 239
- CHAPTER 31** Configuring Generic Routing Encapsulation (GRE) Tunnels 249
- CHAPTER 32** Configuring Point-to-Point Protocol over Ethernet (PPPoE) 251

Part XI Network Security

- CHAPTER 33** Managing Traffic Using Access Control Lists (ACL) 257

Part XII Appendixes

- APPENDIX A** Binary/Hex/Decimal Conversion Chart 271
- APPENDIX B** Create Your Own Journal Here 296

Table of Contents

Introduction xx

Part I TCP/IP v4

CHAPTER 1	How to Subnet	1
	Class A–E Addresses	1
	Converting Between Decimal Numbers and Binary	2
	Subnetting a Class C Network Using Binary	2
	Subnetting a Class B Network Using Binary	5
	Binary ANDing	9
	So Why AND?	10
	Shortcuts in Binary ANDing	11
	The Enhanced Bob Maneuver for Subnetting (or How to Subnet Anything in Under a Minute)	12
CHAPTER 2	VLSM	15
	IP Subnet Zero	15
	VLSM Example	16
	Step 1 Determine How Many H Bits Will Be Needed to Satisfy the <i>Largest</i> Network	16
	Step 2 Pick a Subnet for the Largest Network to Use	17
	Step 3 Pick the Next Largest Network to Work With	18
	Step 4 Pick the Third Largest Network to Work With	20
	Step 5 Determine Network Numbers for Serial Links	21
CHAPTER 3	Route Summarization	25
	Example for Understanding Route Summarization	25
	Step 1: Summarize Winnipeg’s Routes	26
	Step 2: Summarize Calgary’s Routes	27
	Step 3: Summarize Edmonton’s Routes	27
	Step 4: Summarize Vancouver’s Routes	28
	Route Summarization and Route Flapping	30
	Requirements for Route Summarization	30

Part II Introduction to Cisco Devices

CHAPTER 4	Cables and Connections	31
	Connecting a Rollover Cable to Your Router or Switch	31
	Using a USB Cable to Connect to Your Router or Switch	31
	Terminal Settings	32
	LAN Connections	33

- Serial Cable Types 33
- Which Cable to Use? 35
- 568A Versus 568B Cables 35

- CHAPTER 5** The Command Line Interface 37
 - Shortcuts for Entering Commands 37
 - Using the (Tab) Key to Complete Commands 37
 - Console Error Messages 38
 - Using the Question Mark for Help 38
 - enable Command 39
 - exit Command 39
 - disable Command 39
 - logout Command 39
 - Setup Mode 39
 - Keyboard Help 40
 - History Commands 41
 - terminal Commands 41
 - show Commands 42
 - Using the Pipe Parameter (|) with the show Command 42

Part III Configuring a Router

- CHAPTER 6** Configuring a Single Cisco Router 45
 - Router Modes 45
 - Entering Global Configuration Mode 46
 - Configuring a Router Name 46
 - Configuring Passwords 46
 - Password Encryption 47
 - Interface Names 47
 - Moving Between Interfaces 50
 - Configuring a Serial Interface 50
 - Configuring a Fast Ethernet Interface 51
 - Configuring a Gigabit Ethernet Interface 51
 - Creating a Message-of-the-Day Banner 51
 - Creating a Login Banner 51
 - Setting the Clock Time Zone 52
 - Assigning a Local Host Name to an IP Address 52
 - The no ip domain-lookup Command 52
 - The logging synchronous Command 52
 - The exec-timeout Command 53
 - Saving Configurations 53
 - Erasing Configurations 53
 - show Commands 53

EXEC Commands in Configuration Mode: The do Command	54
Configuration Example: Basic Router Configuration	54
Boston Router	55

Part IV Routing

CHAPTER 7 Static Routing 57

Configuring a Static Route on a Router	57
The permanent Keyword (Optional)	58
Static Routes and Administrative Distance (Optional)	58
Configuring a Default Route on a Router	59
Verifying Static Routes	59
Configuration Example: Static Routes	60
Boston Router	60
Buffalo Router	61
Bangor Router	61

CHAPTER 8 EIGRP 63

Configuring Enhanced Interior Gateway Routing Protocol (EIGRP)	63
EIGRP Auto-Summarization	65
EIGRP Manual Summarization	65
Passive EIGRP Interfaces	65
Equal-Cost Load Balancing: Maximum Paths	66
Unequal-Cost Load Balancing: Variance	66
Bandwidth Use	67
Authentication	67
Verifying EIGRP	68
Troubleshooting EIGRP	69
Configuration Example: EIGRP	69
Austin Router	70
Houston Router	71

CHAPTER 9 Single-Area OSPF 73

Configuring OSPF	73
Using Wildcard Masks with OSPF Areas	74
Loopback Interfaces	75
Router ID	75
DR/BDR Elections	76
Modifying Cost Metrics	76
OSPF auto-cost reference-bandwidth	77
Authentication: Simple	77
Authentication: Using MD5 Encryption	78
Timers	78

Propagating a Default Route	78
Verifying OSPF Configuration	79
Troubleshooting OSPF	79
Configuration Example: Single Area OSPF	80
Austin Router	80
Houston Router	81
Galveston Router	82

CHAPTER 10 Multi-Area OSPF 83

Configuring Multi-Area OSPF	83
Passive Interfaces	84
Route Summarization	84
Configuration Example: Multi-Area OSPF	85
ASBR Router	86
ABR-1 Router	87
ABR-2 Router	88
Internal Router	89

Part V Switching

CHAPTER 11 Configuring a Switch 91

Help Commands	91
Command Modes	91
Verifying Commands	92
Resetting Switch Configuration	92
Setting Host Names	92
Setting Passwords	93
Setting IP Addresses and Default Gateways	93
Setting Interface Descriptions	94
The mdix auto Command	94
Setting Duplex Operation	95
Setting Operation Speed	95
Managing the MAC Address Table	95
Configuring Static MAC Addresses	95
Switch Port Security	96
Verifying Switch Port Security	96
Sticky MAC Addresses	97
Configuration Example	97

CHAPTER 12 VLANs 101

Creating Static VLANs	101
Using VLAN Configuration Mode	101
Using VLAN Database Mode	102

Assigning Ports to VLANs	102
Using the range Command	103
Verifying VLAN Information	103
Saving VLAN Configurations	103
Erasing VLAN Configurations	104
Configuration Example: VLANs	104
CHAPTER 13 VLAN Trunking Protocol and Inter-VLAN Communication	107
Dynamic Trunking Protocol	107
Dynamic Trunking Protocol (DTP)	108
Setting the Encapsulation Type	108
VLAN Trunking Protocol (VTP)	109
Verifying VTP	110
Inter-VLAN Communication Using an External Router: Router-on-a-Stick	110
Inter-VLAN Communication on a Multilayer Switch Through a Switch Virtual Interface	111
Removing L2 Switchport Capability of a Switch Port	111
Configuring Inter-VLAN Communication	111
Inter-VLAN Communication Tips	112
Configuration Example: Inter-VLAN Communication	112
ISP Router	113
CORP Router	114
L2Switch2 (Catalyst 2960)	116
L3Switch1 (Catalyst 3560)	118
L2Switch1 (Catalyst 2960)	119
CHAPTER 14 Spanning Tree Protocol and EtherChannel	121
Spanning Tree Protocol	121
Enabling Spanning Tree Protocol	121
Configuring the Root Switch	122
Configuring a Secondary Root Switch	122
Configuring Port Priority	123
Configuring the Path Cost	123
Configuring the Switch Priority of a VLAN	123
Configuring STP Timers	124
Verifying STP	124
Optional STP Configurations	125
Changing the Spanning-Tree Mode	126
Extended System ID	126
Enabling Rapid Spanning Tree	127
Troubleshooting Spanning Tree	127
Configuration Example: STP	127

EtherChannel	129
Interface Modes in EtherChannel	130
Guidelines for Configuring EtherChannel	130
Configuring Layer 2 EtherChannel	131
Verifying EtherChannel	131
Configuration Example: EtherChannel	132

Part VI Layer 3 Redundancy

CHAPTER 15	HSRP and GLBP	137
	Hot Standby Router Protocol	137
	Configuring HSRP on a Router	138
	Configuring HSRP on an L3 Switch	138
	Default HSRP Configuration Settings	139
	Verifying HSRP	139
	HSRP Optimization Options	139
	Preempt	140
	HSRP Message Timers	140
	Interface Tracking	141
	Multiple HSRP	141
	Debugging HSRP	142
	Virtual Router Redundancy Protocol	143
	Configuring VRRP	143
	Verifying VRRP	144
	Debugging VRRP	145
	Gateway Load Balancing Protocol	145
	Configuring GLBP	145
	Verifying GLBP	147
	Debugging GLBP	148
	Configuration Example: GLBP	148
	DLS1	149
	DLS2	150

Part VII IPv6

CHAPTER 16	IPv6	153
	Assigning IPv6 Addresses to Interfaces	153
	IPv6 and RIPng	154
	Configuration Example: IPv6 RIP	155
	Austin Router	155
	IPv6 Tunnels: Manual Overlay Tunnel	157
	Juneau Router	157
	Fairbanks Router	158

Static Routes in IPv6	159
Floating Static Routes in IPv6	160
Default Routes in IPv6	160
Verifying and Troubleshooting IPv6	160
IPv6 Ping	162
IPv6 Traceroute	162

CHAPTER 17 OSPFv3 163

IPv6 and OSPFv3	163
Enabling OSPF for IPv6 on an Interface	163
Enabling an OSPF for IPv6 Area Range	164
Enabling an IPv4 Router ID for OSPFv3	165
Forcing an SPF Calculation	165
Verifying and Troubleshooting IPv6 and OSPFv3	165
Configuration Example: OSPFv3	166
R3 Router	166
R2 Router	167
R1 Router	168
R4 Router	169

CHAPTER 18 EIGRP for IPv6 171

IPv6 and EIGRP	171
Enabling EIGRP for IPv6 on an Interface	171
Configuring the Percentage of Link Bandwidth Used by EIGRP	172
Configuring Summary Addresses	172
Configuring EIGRP Route Authentication	172
Configuring EIGRP Timers	172
Logging EIGRP Neighbor Adjacency Changes	173
Adjusting the EIGRP for IPv6 Metric Weights	173
Verifying and Troubleshooting EIGRP for IPv6	173
Configuration Example: EIGRP for IPv6	174
R3 Router	174
R2 Router	175
R1 Router	176

Part VIII Network Administration and Troubleshooting**CHAPTER 19 Backing Up and Restoring Cisco IOS Software and Configurations 177**

Boot System Commands	177
The Cisco IOS File System	178
Viewing the Cisco IOS File System	178
Commonly Used URL Prefixes for Cisco Network Devices	178

- Deciphering IOS Image Filenames 179
- Backing Up Configurations to a TFTP Server 180
- Restoring Configurations from a TFTP Server 180
- Backing Up the Cisco IOS Software to a TFTP Server 181
- Restoring/Upgrading the Cisco IOS Software from a TFTP Server 181
- Restoring the Cisco IOS Software from ROM Monitor Mode Using Xmodem 182
- Restoring the Cisco IOS Software Using the ROM Monitor Environmental Variables and tftpdnld Command 184

- CHAPTER 20** Password-Recovery Procedures and the Configuration Register 187
 - The Configuration Register 187
 - A Visual Representation 187
 - What the Bits Mean 187
 - The Boot Field 188
 - Console Terminal Baud Rate Settings 188
 - Changing the Console Line Speed: CLI 189
 - Changing the Console Line Speed: ROM Monitor Mode 189
 - Password-Recovery Procedures for Cisco Routers 190
 - Password Recovery for 2960 Series Switches 191

- CHAPTER 21** Cisco Discovery Protocol (CDP) 193
 - Cisco Discovery Protocol 193

- CHAPTER 22** Remote Connectivity Using Telnet or SSH 195
 - Configuring a Device to Accept a Remote Telnet Connection 195
 - Using Telnet to Remotely Connect to Other Devices 196
 - Verifying Telnet 197
 - Configuring the Secure Shell Protocol (SSH) 197
 - Verifying SSH 198

- CHAPTER 23** Verifying End-to-End Connectivity 199
 - ICMP Redirect Messages 199
 - The ping Command 199
 - Examples of Using the ping and the Extended ping Commands 200
 - The traceroute Command 201

- CHAPTER 24** Configuring Network Management Protocols 203
 - Configuring SNMP 203
 - Configuring Syslog 204
 - Syslog Message Format 204
 - Syslog Severity Levels 205

Syslog Message Example 205
Configuring NetFlow 206
Verifying NetFlow 206

CHAPTER 25 Basic Troubleshooting 207

Viewing the Routing Table 207
Clearing the Routing Table 208
Determining the Gateway of Last Resort 208
Determining the Last Routing Update 208
OSI Layer 3 Testing 208
OSI Layer 7 Testing 209
Interpreting the show interface Command 209
Clearing Interface Counters 209
Using CDP to Troubleshoot 209
The traceroute Command 209
The show controllers Command 210
debug Commands 210
Using Time Stamps 210
Operating System IP Verification Commands 211
The ip http server Command 211
The netstat Command 211
The arp Command 211

CHAPTER 26 Cisco IOS Licensing 213

Cisco Licensing Earlier Than IOS 15.0 213
Cisco Licensing for the ISR G2 Platforms: IOS 15.0 and Later 215
Verifying Licenses 215
Cisco License Manager 215
Installing a Permanent License 216
Installing an Evaluation License 217
Backing Up a License 217
Uninstalling a License 217

Part IX Managing IP Services

CHAPTER 27 Network Address Translation 219

Configuring Dynamic NAT: One Private to One Public Address Translation 219
Configuring PAT: Many Private to One Public Address Translation 221
Configuring Static NAT: One Private to One Permanent Public Address Translation 222
Verifying NAT and PAT Configurations 223
Troubleshooting NAT and PAT Configurations 224

Configuration Example: PAT 224
 ISP Router 224
 Company Router 225

CHAPTER 28 Dynamic Host Configuration Protocol (DHCP) 227
 Configuring a DHCP Server on an IOS Router 227
 Verifying and Troubleshooting DHCP Configuration 228
 Configuring a DHCP Helper Address 228
 DHCP Client on a Cisco IOS Software Ethernet Interface 229
 Configuration Example: DHCP 229
 Edmonton Router 229
 Gibbons Router 231

Part X WANS

CHAPTER 29 Configuring Serial Encapsulation: HDLC and PPP 233
 Configuring HDLC Encapsulation on a Serial Line 233
 Configuring Point-to-Point Protocol (PPP) on a Serial Line (Mandatory Commands) 233
 Configuring PPP on a Serial Line (Optional Commands): Compression 234
 Configuring PPP on a Serial Line (Optional Commands): Link Quality 234
 Configuring PPP on a Serial Line (Optional Commands): Multilink 234
 Configuring PPP on a Serial Line (Optional Commands): Authentication 234
 Verifying and Troubleshooting a Serial Link/PPP Encapsulation 235
 Configuration Example: PPP with CHAP Authentication 236
 Boston Router 236
 Buffalo Router 237

CHAPTER 30 Establishing WAN Connectivity Using Frame Relay 239
 Configuring Frame Relay 239
 Setting the Frame Relay Encapsulation Type 239
 Setting the Frame Relay Encapsulation LMI Type 239
 Setting the Frame Relay DLCI Number 240
 Configuring a Frame Relay map Statement 240
 Configuring a Description of the Interface (Optional) 240
 Configuring Frame Relay Using Subinterfaces 240
 Verifying Frame Relay 241
 Troubleshooting Frame Relay 242
 Configuration Example: Point-to-Point Frame Relay Using Subinterfaces and OSPF 242

Houston Router	242
Austin Router	244
Galveston Router	244
Laredo Router	245
Configuration Example: Point-to-Multipoint Frame Relay Using Subinterfaces and EIGRP	246
R1 Router	246
R2 Router	247
R3 Router	248
CHAPTER 31 Configuring Generic Routing Encapsulation (GRE) Tunnels	249
Configuring a GRE Tunnel	249
Branch Router	249
HQ Router	250
Verifying a GRE Tunnel	250
CHAPTER 32 Configuring Point-to-Point Protocol over Ethernet (PPPoE)	251
Configuring a DSL Connection using PPPoE	251
Step 1: Configure PPPoE (External Modem)	252
Step 2: Configure the Dialer Interface	253
Step 3: Define Interesting Traffic and Specify Default Routing	253
Step 4: Configure NAT Using an ACL	254
Step 5: Configure NAT Using a Route Map	254
Step 6: Configure DHCP Service	255
Step 7: Apply NAT Programming	255
Step 8: Verify a PPPoE Connection	255
Part XI Network Security	
CHAPTER 33 Managing Traffic Using Access Control Lists (ACL)	257
Access List Numbers	257
Using Wildcard Masks	258
ACL Keywords	258
Creating Standard ACLs	259
Applying Standard ACLs to an Interface	260
Verifying ACLs	260
Removing ACLs	260
Creating Extended ACLs	261
Applying Extended ACLs to an Interface	262
The established Keyword (Optional)	262
Creating Named ACLs	262
Using Sequence Numbers in Named ACLs	263

- Removing Specific Lines in Named ACLs Using Sequence Numbers 264
- Sequence Number Tips 264
- Including Comments About Entries in ACLs 265
- Restricting Virtual Terminal Access 265
- Tips for Configuring ACLs 266
- ACLs and IPv6 266
- Configuration Examples: ACLs 267

Part XII Appendixes

APPENDIX A Binary/Hex/Decimal Conversion Chart 271

APPENDIX B Create Your Own Journal Here 279

Command Syntax Conventions

The conventions used to present command syntax in this book are the same conventions used in the IOS Command Reference. The Command Reference describes these conventions as follows:

- **Boldface** indicates commands and keywords that are entered literally, as shown. In actual configuration examples and output (not general command syntax), boldface indicates commands that are manually input by the user (such as a show command).
- *Italics* indicate arguments for which you supply actual values.
- Vertical bars (|) separate alternative, mutually exclusive elements.
- Square brackets [] indicate optional elements.
- Braces { } indicate a required choice.
- Braces within brackets [{ }] indicate a required choice within an optional element.

Introduction

Welcome to CCNA Routing and Switching! This book is the result of a massive redesign by Cisco of their entry-level certification exams to more closely align with industry's need for networking talent as we enter into the era of “the Internet of Everything.” The success of the previous two editions of this book prompted Cisco Press to approach me with a request to update the book with the necessary new content to help both students and IT professionals in the field study and prepare for the new CCNA Routing and Switching exam. For someone who originally thought that this book would be less than 100 pages in length and limited to the Cisco Networking Academy program for its complete audience, I am continually amazed that my little engineering journal has caught on with such a wide range of people throughout the IT community.

I have long been a fan of what I call the “engineering journal,” a small notebook that can be carried around and that contains little nuggets of information—commands that you forget, the IP addressing scheme of some remote part of the network, little reminders about how to do something you only have to do once or twice a year (but is vital to the integrity and maintenance of your network). This journal has been a constant companion by my side for the past 15 years; I only teach some of these concepts every second or third year, so I constantly need to refresh commands and concepts and learn new commands and ideas as they are released by Cisco. My journals are the best way for me to review because they are written in my own words (words that I can understand). At least, I had better understand them, because if I can't, I have only myself to blame.

My first published engineering journal was the *CCNA Quick Command Guide*; it was organized to match to the (then) order of the Cisco Networking Academy program. That book then morphed into the *Portable Command Guide*, the third edition of which you are reading right now. This book is my “industry” edition of the engineering journal. It contains a different logical flow to the topics, one more suited to someone working in the field. Like topics are grouped together: routing protocols, switches, troubleshooting. More-complex examples are given. New topics have been added, such as OSPFv3 and EIGRPv6 for IPv6, multi-area OSPF, PPPoE, GRE tunnels, and Cisco IOS Version 15. The popular “Create Your Own Journal” appendix is still here (blank pages for you to add in your own commands that you need in your specific job). We all recognize the fact that no network administrator's job can be so easily pigeonholed as to just working with CCNA topics; you all have your own specific jobs and duties assigned to you. That is why you will find those blank pages at the end of the book. Make this book your own; personalize it with what you need to make it more effective. That way your journal will not look like mine.

Networking Devices Used in the Preparation of This Book

To verify the commands in this book, I had to try them out on a few different devices. The following is a list of the equipment I used when writing this book:

- C2821 ISR with PVD2, CMME, a WIC-2T, FXS and FXO VICs, running 12.4(10a) IPBase IOS
- WS-C2960-24TT-L Catalyst switch, running 12.2(25)SE IOS
- WS-C2950-12 Catalyst switch, running Version C2950-C3.0(5.3)WC(1) Enterprise Edition software
- C1941 ISRG2 router with WIC 2T and HWIC-4ESW, running Version 15.1(1)T Cisco IOS with a technology package of IPBaseK9

Those of you familiar with Cisco devices will recognize that a majority of these commands work across the entire range of the Cisco product line. These commands are not limited to the platforms and Cisco IOS Software versions listed. In fact, these devices are in most cases adequate for someone to continue his or her studies into the CCNP level, too.

Private Addressing Used in this Book

This book makes use of RFC 1918 addressing throughout. Because I do not have permission to use public addresses in my examples, I have done everything with private addressing. Private addressing is perfect for use in a lab environment or in a testing situation because it works exactly like public addressing, with the exception that it cannot be routed across a public network. That is why you will see private addresses in my WAN links between two routers using serial connections or in my Frame Relay cloud.

Who Should Read This Book

This book is for those people preparing for the CCNA Routing and Switching exam, whether through self-study, on-the-job training and practice, or through study within the Cisco Networking Academy program. There are also some handy hints and tips along the way to make life a bit easier for you in this endeavor. It is small enough that you will find it easy to carry around with you. Big, heavy textbooks might look impressive on your bookshelf in your office, but can you really carry them all around with you when you are working in some server room or equipment closet somewhere?

Optional Sections

A few sections in this book have been marked as optional. These sections cover topics that are not on the CCNA Routing and Switching certification exam, but they are valuable topics that I believe should be known by someone at a CCNA level. Some of the optional topics might also be concepts that are covered in the Cisco Networking Academy program courses.

Organization of This Book

This book follows what I think is a logical approach to configuring a small to mid-size network. It is an approach that I give to my students when they invariably ask for some sort of outline to plan and then configure a network. Specifically, this approach is as follows:

Part I: TCP/IP v4

- **Chapter 1, “How to Subnet”**—An overview of how to subnet, examples of subnetting (both a Class B and a Class C address), the use of the binary AND operation, the Enhanced Border Gateway Protocol to Subnetting
- **Chapter 2, “VLSM”**—An overview of VLSM, an example of using VLSM to make your IP plan more efficient
- **Chapter 3, “Route Summarization”**—Using route summarization to make your routing updates more efficient, an example of how to summarize a network, necessary requirements for summarizing your network

Part II: Introduction to Cisco Devices

- **Chapter 4, “Cables and Connections”**—An overview of how to connect to Cisco devices, which cables to use for which interfaces, and the differences between the TIA/EIA 568A and 568B wiring standards for UTP
- **Chapter 5, “The Command-Line Interface”**—How to navigate through Cisco IOS Software: editing commands, keyboard shortcuts, and help commands

Part III: Configuring a Router

- **Chapter 6, “Configuring a Single Cisco Router”**—Commands needed to configure a single router: names, passwords, configuring interfaces, MOTD and login banners, IP host tables, saving and erasing your configurations

Part IV: Routing

- **Chapter 7, “Static Routing”**—Configuring static routes in your internetwork
- **Chapter 8, “EIGRP”**—Configuring and verifying EIGRP
- **Chapter 9, “Single Area OSPF”**—Configuring and verifying single-area OSPF
- **Chapter 10, “Multi-Area OSPF”**—Configuring and verifying multi-area OSPF

Part V: Switching

- **Chapter 11, “Configuring a Switch”**—Commands to configure Catalyst 2960 switches: names, passwords, IP addresses, default gateways, port speed and duplex; configuring static MAC addresses; managing the MAC address table; port security
- **Chapter 12, “VLANs”**—Configuring static VLANs, troubleshooting VLANs, saving and deleting VLAN information.
- **Chapter 13, “VLAN Trunking Protocol and Inter-VLAN Communication”**—Configuring a VLAN trunk link, configuring VTP, verifying VTP, inter-VLAN communication, router-on-a-stick, subinterfaces, and SVIs.

- **Chapter 14, “Spanning Tree Protocol and EtherChannel”**—Verifying STP, setting switch priorities, and creating and verifying EtherChannel groups between switches

Part VI: Layer 3 Redundancy

- **Chapter 15, “HSRP and GLBP”**— Configuring HSRP, interface tracking, setting priorities, configuring GLBP.

Part VII: IPv6

- **Chapter 16, “IPv6”**— Transitioning to IPv6; format of IPv6 addresses; configuring IPv6 (interfaces, tunneling, static routing)
- **Chapter 17, “OSPFv3”**— Configuring OSPF to work with IPv6,
- **Chapter 18, “EIGRP for IPv6”**— Configuring EIGRP to work with IPv6.

Part VIII: Network Administration and Troubleshooting

- **Chapter 19, “Backing Up and Restoring Cisco IOS Software and Configurations”**—Boot commands for Cisco IOS Software, backing up and restoring Cisco IOS Software using TFTP, Xmodem, and ROMmon environmental variables
- **Chapter 20, “Password-Recovery Procedures and the Configuration Register”**—The configuration register, password recovery procedure for routers and switches
- **Chapter 21, “Cisco Discovery Protocol (CDP)”**—Customizing and verifying CDP
- **Chapter 22, “Remote Connectivity Using Telnet or SSH”**—Commands used for Telnet and SSH to remotely connect to other devices
- **Chapter 23, “Verifying End-to-End Connectivity”**—Commands for both **ping** and extended **ping**; the **traceroute** command
- **Chapter 24, “Configuring Network Management Protocols”**—Configuring SNMP, working with syslog, Severity Levels, Configuring NetFlow
- **Chapter 25, “Basic Troubleshooting”**—Various **show** commands used to view the routing table; interpreting the **show** interface command; verifying your IP settings using different operating systems
- **Chapter 26, “Cisco IOS Licensing”**— Differences between licensing pre- and post-Cisco IOS Version 15, installing permanent and evaluation licenses, backing up and uninstalling licenses

Part IX: Managing IP Services

- **Chapter 27, “Network Address Translation”**—Configuring and verifying NAT and PAT
- **Chapter 28, “Dynamic Host Configuration Protocol (DHCP)”**—Configuring and verifying DHCP on a Cisco IOS router

Part X: WANs

- **Chapter 29, “Configuring Serial Encapsulation: HDLC and PPP”**—Configuring PPP, authentication of PPP using CHAP, compression in PPP; multilink in PPP, troubleshooting PPP, returning to HDLC encapsulation
- **Chapter 30, “Establishing WAN Connectivity Using Frame Relay”**—Configuring basic Frame Relay, Frame Relay and subinterfaces, DLCIs, verifying and troubleshooting Frame Relay
- **Chapter 31, “Configuring Generic Routing Encapsulation (GRE) Tunnels”**—Configuring and verifying GRE tunnels
- **Chapter 32, “Configuring Point-to-Point Protocol over Ethernet (PPPoE)”**—Configuring a DSL connection using PPPoE

Part XI: Network Security

- **Chapter 33, “Managing Traffic Using Access Control Lists (ACL)”**—Configuring standard ACLs, wildcard masking, creating extended ACLs, creating named ACLs, using sequence numbers in named ACLs, verifying and troubleshooting ACLs, ACLs and IPv6

Part XII: Appendixes

- **Appendix A, “Binary/Hex/Decimal Conversion Chart”**—A chart showing numbers 0 through 255 in the three numbering systems of binary, hexadecimal, and decimal
- **Appendix B, “Create Your Own Journal Here”**—Some blank pages for you to add in your own specific commands that might not be in this book

Did I Miss Anything?

I am always interested to hear how my students, and now readers of my books, do on both certification exams and future studies. If you would like to contact me and let me know how this book helped you in your certification goals, please do so. Did I miss anything? Let me know. Contact me at ccnaguide@empson.ca or through the Cisco Press website, <http://www.ciscopress.com>.

This page intentionally left blank

Route Summarization

Route summarization, or supernetting, is needed to reduce the number of routes that a router advertises to its neighbor. Remember that for every route you advertise, the size of your update grows. It has been said that if there were no route summarization, the Internet backbone would have collapsed from the sheer size of its own routing tables back in 1997!

Routing updates, whether done with a distance vector or link-state protocol, grow with the number of routes you need to advertise. In simple terms, a router that needs to advertise ten routes needs ten specific lines in its update packet. The more routes you have to advertise, the bigger the packet. The bigger the packet, the more bandwidth the update takes, reducing the bandwidth available to transfer data. But with route summarization, you can advertise many routes with only one line in an update packet. This reduces the size of the update, allowing you more bandwidth for data transfer.

Also, when a new data flow enters a router, the router must do a lookup in its routing table to determine which interface the traffic must be sent out. The larger the routing tables, the longer this takes, leading to more used router CPU cycles to perform the lookup. Therefore, a second reason for route summarization is that you want to minimize the amount of time and router CPU cycles that are used to route traffic.

NOTE This example is a very simplified explanation of how routers send updates to each other. For a more in-depth description, I highly recommend you go out and read Jeff Doyle's book *Routing TCP/IP*, Volume 1, 2nd edition, Cisco Press. This book has been around for many years and is considered by most to be the authority on how the different routing protocols work. If you are considering continuing on in your certification path to try and achieve the CCIE, you need to buy Doyle's book—and memorize it; it's that good.

Example for Understanding Route Summarization

Refer to Figure 3-1 to assist you as you go through the following explanation of an example of route summarization.

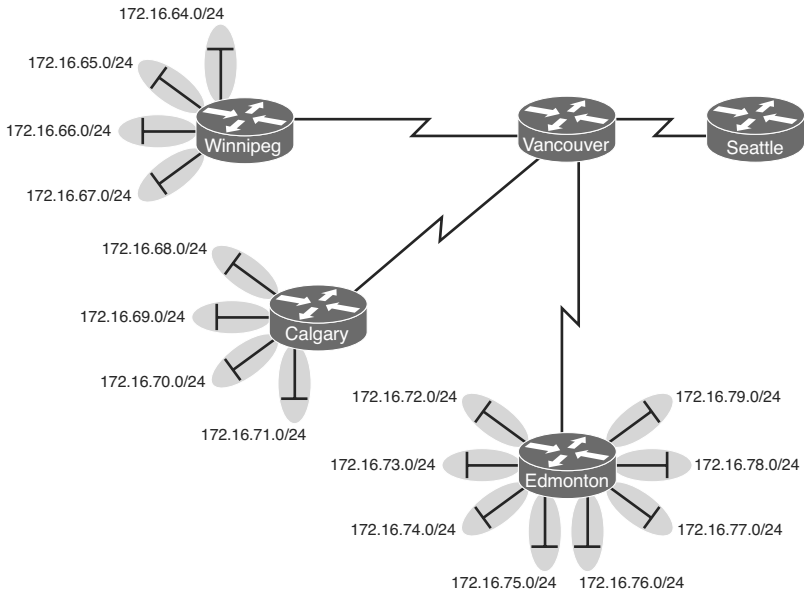


Figure 3-1 Four-City Network Without Route Summarization

As you can see from Figure 3-1, Winnipeg, Calgary, and Edmonton each have to advertise internal networks to the main router located in Vancouver. Without route summarization, Vancouver would have to advertise 16 networks to Seattle. You want to use route summarization to reduce the burden on this upstream router.

Step 1: Summarize Winnipeg’s Routes

To do this, you need to look at the routes in binary to see if there are any specific bit patterns that you can use to your advantage. What you are looking for are common bits on the network side of the addresses. Because all of these networks are /24 networks, you want to see which of the first 24 bits are common to all four networks.

```

172.16.64.0 = 10101100.00010000.01000000.00000000
172.16.65.0 = 10101100.00010000.01000001.00000000
172.16.66.0 = 10101100.00010000.01000010.00000000
172.16.67.0 = 10101100.00010000.01000011.00000000
Common bits: 10101100.00010000.010000xx
    
```

You see that the first 22 bits of the four networks are common. Therefore, you can summarize the four routes by using a subnet mask that reflects that the first 22 bits are common. This is a /22 mask, or 255.255.252.0. You are left with the summarized address of

```
172.16.64.0/22
```

This address, when sent to the upstream Vancouver router, will tell Vancouver: “If you have any packets that are addressed to networks that have the first 22 bits in the pattern of 10101100.00010000.010000xx.xxxxxxxx, then send them to me here in Winnipeg.”

By sending one route to Vancouver with this supernetted subnet mask, you have advertised four routes in one line, instead of using four lines. Much more efficient!

Step 2: Summarize Calgary’s Routes

For Calgary, you do the same thing that you did for Winnipeg—look for common bit patterns in the routes:

172.16.68.0 = 10101100.00010000.01000100.00000000

172.16.69.0 = 10101100.00010000.01000101.00000000

172.16.70.0 = 10101100.00010000.01000110.00000000

172.16.71.0 = 10101100.00010000.01000111.00000000

Common bits: 10101100.00010000.010001xx

Once again, the first 22 bits are common. The summarized route is therefore

172.16.68.0/22

Step 3: Summarize Edmonton’s Routes

For Edmonton, you do the same thing that we did for Winnipeg and Calgary—look for common bit patterns in the routes:

172.16.72.0 = 10101100.00010000.01001000.00000000

172.16.73.0 = 10101100.00010000.01001001.00000000

172.16.74.0 = 10101100.00010000 01001010.00000000

172.16.75.0 = 10101100.00010000 01001011.00000000

172.16.76.0 = 10101100.00010000.01001100.00000000

172.16.77.0 = 10101100.00010000.01001101.00000000

172.16.78.0 = 10101100.00010000.01001110.00000000

172.16.79.0 = 10101100.00010000.01001111.00000000

Common bits: 10101100.00010000.01001xxx

For Edmonton, the first 21 bits are common. The summarized route is therefore

172.16.72.0/21

Figure 3-2 shows what the network looks like, with Winnipeg, Calgary, and Edmonton sending their summarized routes to Vancouver.

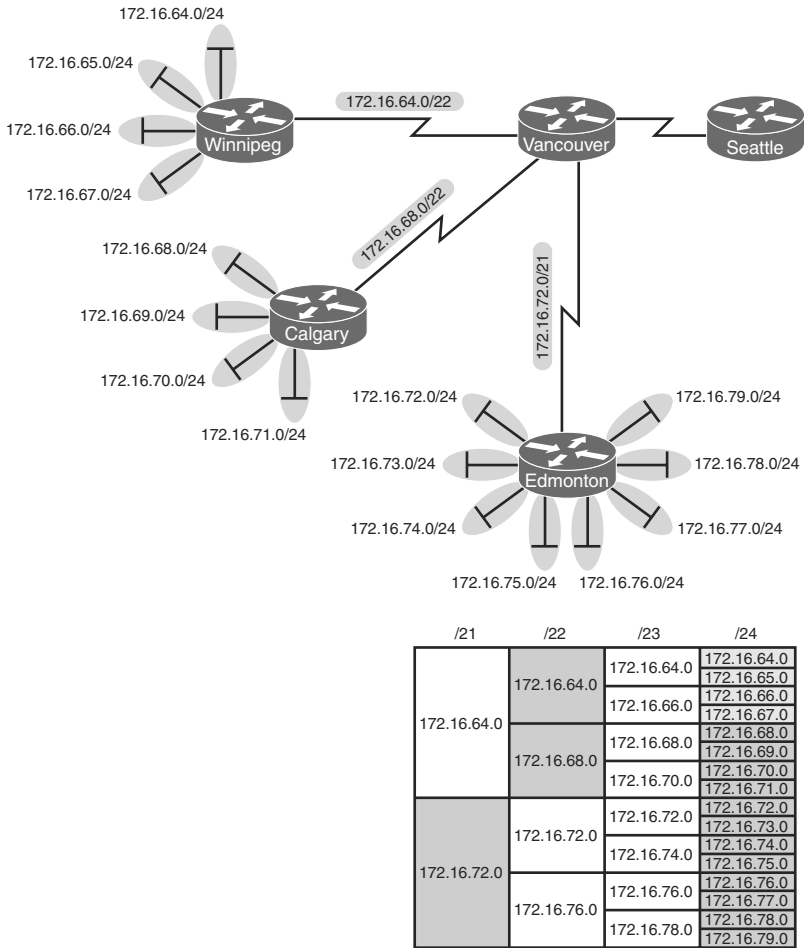


Figure 3-2 Four-City Network with Edge Cities Summarizing Routes

Step 4: Summarize Vancouver’s Routes

Yes, you can summarize Vancouver’s routes to Seattle. You continue in the same format as before. Take the routes that Winnipeg, Calgary, and Edmonton sent to Vancouver, and look for common bit patterns:

172.16.64.0 = 10101100.00010000.01000000.00000000
 172.16.68.0 = 10101100.00010000.01000100.00000000
 172.16.72.0 = 10101100.00010000.01001000.00000000
 Common bits: 10101100.00010000.0100xxxx

Because there are 20 bits that are common, you can create one summary route for Vancouver to send to Seattle:

172.16.64.0/20

Vancouver has now told Seattle that in one line of a routing update, 16 different networks are being advertised. This is much more efficient than sending 16 lines in a routing update to be processed.

Figure 3-3 shows what the routing updates would look like with route summarization taking place.

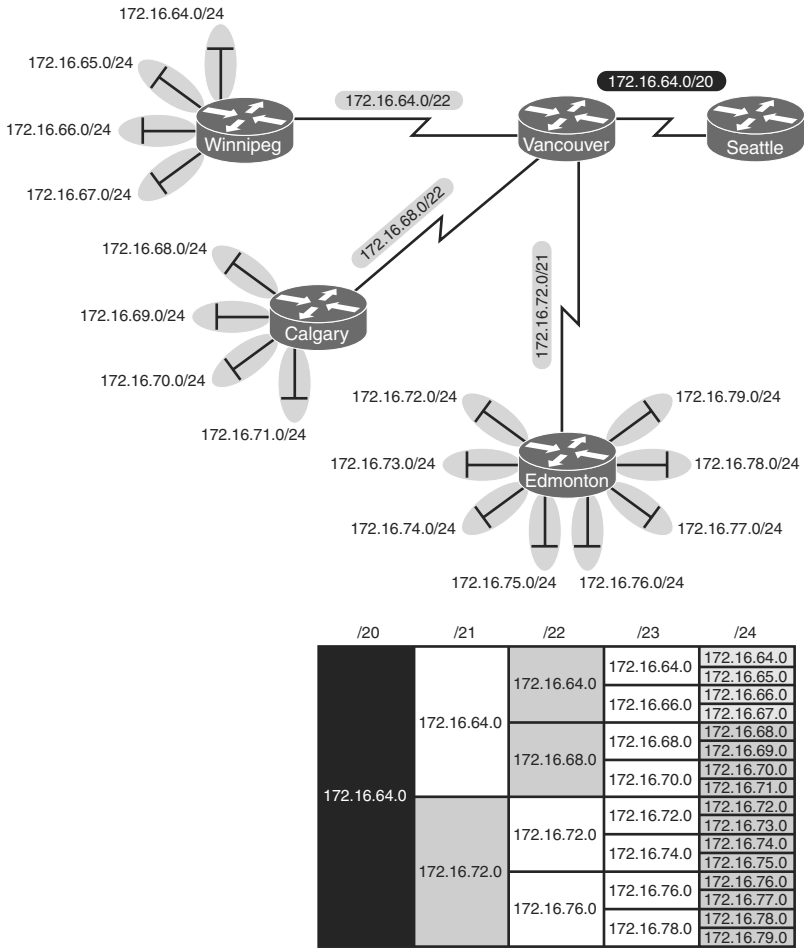


Figure 3-3 Four-City Network with Complete Route Summarization

Route Summarization and Route Flapping

Another positive aspect of route summarization has to do with route flapping. *Route flapping* is when a network, for whatever reason (such as interface hardware failure or misconfiguration), goes up and down on a router, causing that router to constantly advertise changes about that network. Route summarization can help insulate upstream neighbors from these problems.

Consider router Edmonton from Figure 3-1. Suppose that network 172.16.74.0/24 goes down. Without route summarization, Edmonton would advertise Vancouver to remove that network. Vancouver would forward that same message upstream to Calgary, Winnipeg, Seattle, and so on. Now assume the network comes back online a few seconds later. Edmonton would have to send another update informing Vancouver of the change. Each time a change needs to be advertised, the router must use CPU resources. If that route were to flap, the routers would constantly have to update their own tables, as well as advertise changes to their neighbors. In a CPU-intensive protocol such as OSPF, the constant hit on the CPU might make a noticeable change to the speed at which network traffic reaches its destination.

Route summarization enables you to avoid this problem. Even though Edmonton would still have to deal with the route constantly going up and down, no one else would notice. Edmonton advertises a single summarized route, 172.16.72.0/21, to Vancouver. Even though one of the networks is going up and down, this does not invalidate the route to the other networks that were summarized. Edmonton will deal with its own route flap, but Vancouver will be unaware of the problem downstream in Edmonton. Summarization can effectively protect or insulate other routers from route flaps.

Requirements for Route Summarization

To create route summarization, there are some necessary requirements:

- Routers need to be running a classless routing protocol, as they carry subnet mask information with them in routing updates. (Examples are RIP v2, OSPF, EIGRP, IS-IS, and BGP.)
- Addresses need to be assigned in a hierarchical fashion for the summarized address to have the same high-order bits. It does no good if Winnipeg has network 172.16.64.0 and 172.16.67.0 while 172.16.65.0 resides in Calgary and 172.16.66.0 is assigned in Edmonton. No summarization could take place from the edge routers to Vancouver.

TIP Because most networks use NAT and the ten networks internally, it is important when creating your network design that you assign network subnets in a way that they can be easily summarized. A little more planning now can save you a lot of grief later.