

# EXAM ✓ CRAM

# CEH

## Certified Ethical Hacker



Cram  
Sheet



Flash  
Cards



Practice  
Tests



Dr. CHUCK EASTTOM

FREE SAMPLE CHAPTER

SHARE WITH OTHERS



EXAM ✓ **CRAM**

**CEH Certified  
Ethical Hacker  
Exam Cram**

**Dr. Chuck Easttom**

## CEH Certified Ethical Hacker Exam Cram

Copyright © 2022 by Pearson Education, Inc.

All rights reserved. This publication is protected by copyright, and permission must be obtained from the publisher prior to any prohibited reproduction, storage in a retrieval system, or transmission in any form or by any means, electronic, mechanical, photocopying, recording, or likewise. For information regarding permissions, request forms, and the appropriate contacts within the Pearson Education Global Rights & Permissions Department, please visit [www.pearson.com/permissions](http://www.pearson.com/permissions).

No patent liability is assumed with respect to the use of the information contained herein. Although every precaution has been taken in the preparation of this book, the publisher and author assume no responsibility for errors or omissions. Nor is any liability assumed for damages resulting from the use of the information contained herein.

ISBN-13: 978-0-13-751344-4

ISBN-10: 0-13-751344-5

Library of Congress Control Number: 2021921550

ScoutAutomatedPrintCode

### Trademarks

All terms mentioned in this book that are known to be trademarks or service marks have been appropriately capitalized. Pearson IT Certification cannot attest to the accuracy of this information. Use of a term in this book should not be regarded as affecting the validity of any trademark or service mark.

### Warning and Disclaimer

Every effort has been made to make this book as complete and as accurate as possible, but no warranty or fitness is implied. The information provided is on an “as is” basis. The author and the publisher shall have neither liability nor responsibility to any person or entity with respect to any loss or damages arising from the information contained in this book.

### Special Sales

For information about buying this title in bulk quantities, or for special sales opportunities (which may include electronic versions; custom cover designs; and content particular to your business, training goals, marketing focus, or branding interests), please contact our corporate sales department at [corpsales@pearsoned.com](mailto:corpsales@pearsoned.com) or (800) 382-3419.

For government sales inquiries, please contact [governmentsales@pearsoned.com](mailto:governmentsales@pearsoned.com).

For questions about sales outside the U.S., please contact [intlcs@pearson.com](mailto:intlcs@pearson.com).

### Editor-in-Chief

Mark Taub

### Director, ITP Product Management

Brett Bartow

### Executive Acquisitions Editor

James Manly

### Development Editor

Ellie Bru

### Managing Editor

Sandra Schroeder

### Project Editor

Mandie Frank

### Copy Editor

Kitty Wilson

### Indexer

Timothy Wright

### Proofreader

Donna Mulder

### Technical Editor

Akhil Behl

### Publishing Coordinator

Cindy Teeters

### Designer

Chuti Prasertsith

### Composer

codeMantra

# Pearson's Commitment to Diversity, Equity, and Inclusion

Pearson is dedicated to creating bias-free content that reflects the diversity of all learners. We embrace the many dimensions of diversity, including but not limited to race, ethnicity, gender, socioeconomic status, ability, age, sexual orientation, and religious or political beliefs.

Education is a powerful force for equity and change in our world. It has the potential to deliver opportunities that improve lives and enable economic mobility. As we work with authors to create content for every product and service, we acknowledge our responsibility to demonstrate inclusivity and incorporate diverse scholarship so that everyone can achieve their potential through learning. As the world's leading learning company, we have a duty to help drive change and live up to our purpose to help more people create a better life for themselves and to create a better world.

Our ambition is to purposefully contribute to a world where:

- ▶ Everyone has an equitable and lifelong opportunity to succeed through learning.
- ▶ Our educational products and services are inclusive and represent the rich diversity of learners.
- ▶ Our educational content accurately reflects the histories and experiences of the learners we serve.
- ▶ Our educational content prompts deeper discussions with learners and motivates them to expand their own learning (and worldview).

While we work hard to present unbiased content, we want to hear from you about any concerns or needs with this Pearson product so that we can investigate and address them.

- ▶ Please contact us with concerns about any potential bias at <https://www.pearson.com/report-bias.html>.

# Credits

<b>Figure</b>	<b>Attribution/Credit</b>
Figure 1-1	Screenshot of Google Search © 2021 Google LLC
Figure 1-2	Screenshot of Google Advanced Search © Google LLC
Figure 1-3	Screenshot of Google Hacking Database © OffSec Services Limited 2021
Figure 1-4	Screenshot of netcraft.com Scan © 1995 - 2021 Netcraft Ltd
Figure 1-5	Screenshot of Shodan Search © Shodan
Figure 1-6	Screenshot of Archive.org Search © The Internet Archive
Figure 1-7	Screenshot of OSINT Page © Osintframework.com
Figure 1-8	Screenshot of Neustar Geolocation ©2021 Neustar, Inc.
Figure 1-9	Screenshot of <a href="https://mxtoolbox.com/DNSLookup.aspx">https://mxtoolbox.com/DNSLookup.aspx</a> DNS Results © Copyright 2004-2021, MXToolBox, Inc
Figure 1-10	Screenshot of tracert Results © Microsoft 2021
Figure 1-11	Screenshot of recon-ng © OffSec Services Limited 2021
Figure 1-12	Screenshot of UPnP SSDP M-SEARCH © Rapid7
Figure 1-13	Screenshot of Zenmap Tool © Insecure.Org
Figure 2-1	Screenshot of Colasoft Main Screen © 2001 - 2021 Colasoft
Figure 2-2	Screenshot of Colasoft Packet Editing © 2001 - 2021 Colasoft
Figure 2-3	Screenshot of Ping Scan © Microsoft 2021
Figure 2-4	Screenshot of Network Pinger Main Screen © Gonçalo Ferreira
Figure 2-5	Screenshot of Network Pinger Results © Gonçalo Ferreira
Figure 2-7	Screenshot of Lan Helper © 2021 Dan.com
Figure 2-8	Screenshot of nbtstat © Microsoft 2021
Figure 2-9	Screenshot of net view © Microsoft 2021
Figure 2-10	Screenshot of Zone Transfer © Microsoft 2021
Figure 2-11	Screenshot of tcpdump © OffSec Services Limited 2021
Figure 2-12	Screenshot of Wireshark Main Screen © Wireshark Foundation
Figure 2-13	Screenshot of Wireshark Color Coding © Wireshark Foundation
Figure 2-14	Screenshot of Nessus Main Screen © 2021 Tenable <sup>®</sup> , Inc
Figure 2-15	Screenshot of Nessus Scan Results © 2021 Tenable <sup>®</sup> , Inc
Figure 3-2	Screenshot of Winrtgen © Massimiliano Montoro
Figure 3-3	Screenshot of pwdump7 © Andres and Miguel Tarasco
Figure 3-4	Screenshot of RainbowCrack © 2020 RainbowCrack Project
Figure 3-5	Screenshot of ADS © Microsoft 2021
Figure 3-6	Screenshot of DeepSound © 2012-2021 Jpinsoft   Jozef Batora

- Figure 3-7 Screenshot of QuickStego © 2020 cybernescence ltd  
Pictorial Press Ltd / Alamy Stock Photo
- Figure 3-8 Screenshot of OpenStego © 2017-2021 Samir Vaidya
- Figure 3-9 Screenshot of ClearLogs © Microsoft 2021
- Figure 3-10 Screenshot of Launching Metasploit in Kali Linux © OffSec  
Services Limited 2021
- Figure 3-11 Screenshot of Launching Metasploit © OffSec Services  
Limited 2021
- Figure 3-12 Screenshot of SMB Scan © OffSec Services Limited 2021
- Figure 3-13 Screenshot of Getting a reverse Shell © Microsoft 2021
- Figure 4-1 Screenshot of eLiTeWrap © Microsoft 2021
- Figure 4-2 Screenshot of DarkHorse Trojan Maker © Trojan virus  
maker 1.2
- Figure 4-3 Screenshot of TeraBIT Virus Maker © TeraBIT Virus Maker
- Figure 4-4 Screenshot of BlackHost Virus Maker © 2021 - BlackHost
- Figure 4-5 Screenshot of Internet Worm Maker Thing © Internet Worm  
Maker Thing
- Figure 4-6 Screenshot of BinText © 2021 McAfee, LLC
- Figure 4-7 Screenshot of IDA Decompiler © 2021 Hex-Rays
- Figure 4-8 Screenshot of Sysinternals Process Explorer © Microsoft 2021
- Figure 5-4 Screenshot of Antivirus System PRO © Antivirus System Pro
- Figure 5-5 Screenshot of Netcraft Anti-phishing © 1995 - 2021 Netcraft  
Ltd
- Figure 5-6 Screenshot of Social Engineer Toolkit © 2021 by TrustedSec
- Figure 5-8 Screenshot of macof © OffSec Services Limited 2021
- Figure 5-9 Screenshot of Changing a MAC Address in Windows 10  
© Microsoft 2021
- Figure 5-10 Screenshot of Technitium MAC Spoofer © Technitium
- Figure 6-1 Screenshot of LOIC © 2021 Slashdot Media
- Figure 6-2 Screenshot of DoSHTTP © Socketsoft LLC
- Figure 6-3 Screenshot of XOIC © 2008-2038 of AppNee Freeware  
Group
- Figure 6-4 Screenshot of HOIC © 2021 Slashdot Media
- Figure 6-5 Screenshot of Burp Suite © 2021 PortSwigger Ltd.
- Figure 7-1 Screenshot of Snort Installation: Choose Components Screen  
©2021 Cisco
- Figure 7-2 Screenshot of Executing Snort ©2021 Cisco
- Figure 7-4a Studio\_G/Shutterstock
- Figure 7-5a
- Figure 7-6a
- Figure 9-7c

- Figure 8-7 Screenshot of Metasploit Main Screen © OffSec Services Limited 2021
- Figure 8-8 Screenshot of Metasploit SMB Scan © OffSec Services Limited 2021
- Figure 8-9 Screenshot of Metasploit Success © OffSec Services Limited 2021
- Figure 9-8 Screenshot of Wigle.net © 2001-2021 bobzilla && arkasha && uhtu
- Figure 9-9 Screenshot of Windows Network Settings © Microsoft 2021
- Figure 9-10 Screenshot of Hot Spot Properties © Microsoft 2021
- Figure 9-11 Screenshot of Linux ifconfig © OffSec Services Limited 2021
- Figure 9-12 Screenshot of Wifi Honey Help © OffSec Services Limited 2021
- Figure 9-13 Screenshot of Setting Up Wifi Honey © OffSec Services Limited 2021
- Figure 10-3 Screenshot of Rogue © Check Point
- Figure 10-4 Screenshot of DroidSheep © DroidSheep
- Figure 13-3 Screenshot of Online Hash Calculator © Tools 4 noobs 2007-2020
- Figure 13-4 Screenshot of Advanced Encryption Package © 2014-1998 InterCrypto Software
- Figure 13-5 Screenshot of Cryptool Version 1 © 1998 - 2021 CrypTool Contributors
- Figure 13-8 Screenshot of Certificate Store © Microsoft 2021
- Figure 11-7 Screenshot of HVAC Vulnerabilities © Shodan
- Figure 11-8 Screenshot of OWASP Top 10 © 2021, OWASP Foundation, Inc.
- Figure 11-9 Screenshot of IoTsploit © IoTsploit
- Figure 11-10 Screenshot of Bitdefender IoT Scanner © 1997-2021 Bitdefender
- Figure 11-11 Screenshot of Foren6 Scanner © GitHub, Inc.

# Contents at a Glance

	Introduction	xx
<b>CHAPTER 1</b>	Reconnaissance and Scanning	1
<b>CHAPTER 2</b>	Enumeration and Vulnerability Scanning	33
<b>CHAPTER 3</b>	System Hacking	65
<b>CHAPTER 4</b>	Malware	93
<b>CHAPTER 5</b>	Packet Sniffing and Social Engineering	123
<b>CHAPTER 6</b>	Denial of Service and Session Hijacking	151
<b>CHAPTER 7</b>	Evading Security Measures	173
<b>CHAPTER 8</b>	Hacking Web Servers and Web Applications	205
<b>CHAPTER 9</b>	Hacking Wireless	233
<b>CHAPTER 10</b>	Hacking Mobile	259
<b>CHAPTER 11</b>	IOT and OT Hacking	283
<b>CHAPTER 12</b>	Cloud Computing and Hacking	309
<b>CHAPTER 13</b>	Cryptography	333
	Glossary	367
	Index	391

# Table of Contents

<b>Introduction</b> . . . . .	<b>xx</b>
<b>CHAPTER 1:</b>	
<b>Reconnaissance and Scanning</b> . . . . .	<b>1</b>
Reconnaissance Types . . . . .	1
Passive Reconnaissance Techniques . . . . .	3
Active Reconnaissance Techniques . . . . .	22
SSDP Scan . . . . .	25
Nmap . . . . .	26
hping . . . . .	28
Banner Grabbing . . . . .	29
TTL and TCP Scanning . . . . .	29
Evading IDS/Firewall . . . . .	30
What Next? . . . . .	32
<b>CHAPTER 2:</b>	
<b>Enumeration and Vulnerability Scanning</b> . . . . .	<b>33</b>
Scanning . . . . .	33
TCP Scanning . . . . .	34
ICMP Scanning . . . . .	37
Scanning Process . . . . .	43
Network Mapping . . . . .	45
Network Packet Capture . . . . .	52
tcpdump . . . . .	52
tcpdump -i eth0 . . . . .	53
tcpdump -c 500 -i eth0 . . . . .	53
tcpdump -D . . . . .	53
Wireshark . . . . .	54
Vulnerability Scanning . . . . .	57
Scoring Vulnerabilities . . . . .	59
Nessus . . . . .	60
Nexpose . . . . .	61
SAINT . . . . .	61
Additional Vulnerability Assessment Tools . . . . .	62
What Next? . . . . .	63

<b>CHAPTER 3:</b>	
<b>System Hacking</b> . . . . .	<b>65</b>
CEH Methodology . . . . .	65
Password Cracking . . . . .	67
pwdump . . . . .	70
RainbowCrack . . . . .	70
Other Password Cracking Tools . . . . .	71
Pass the Hash . . . . .	73
LLMNR/NBT-NS Poisoning . . . . .	74
DLL Hijacking and Injection . . . . .	74
Alternate Data Streams . . . . .	75
macOS Attacks . . . . .	76
Malware . . . . .	76
Rootkits . . . . .	77
Spyware . . . . .	79
Steganography . . . . .	80
Covering Tracks . . . . .	83
Metasploit . . . . .	84
Session Hijacking . . . . .	89
What Next? . . . . .	92
<b>CHAPTER 4:</b>	
<b>Malware</b> . . . . .	<b>93</b>
Malware Types . . . . .	94
Trojan Horses . . . . .	94
Backdoor . . . . .	99
Spyware . . . . .	99
Ransomware . . . . .	100
Rootkits . . . . .	101
Fileless Malware . . . . .	102
Botnet . . . . .	103
Advanced Persistent Threats . . . . .	103
Exploit Kits . . . . .	104
How Malware Spreads . . . . .	104
Malware Components . . . . .	105
Malware Evasion Techniques . . . . .	106
Viruses . . . . .	108
Types of Viruses . . . . .	109

Creating a Virus . . . . .	111
Logic Bombs . . . . .	114
Protecting Against Malware . . . . .	115
Indicators of Malware . . . . .	116
Sheep Dipping . . . . .	116
Backups . . . . .	117
Malware Analysis . . . . .	117
Antivirus . . . . .	120
What Next? . . . . .	122

**CHAPTER 5:****Packet Sniffing and Social Engineering . . . . . 123**

Social Engineering . . . . .	123
Human-Based Social Engineering . . . . .	128
Computer-Based Social Engineering . . . . .	129
Mobile-Based Social Engineering . . . . .	132
Insider Threats . . . . .	132
More on Social Engineering . . . . .	133
Social Engineering Countermeasures . . . . .	134
Packet Sniffing . . . . .	138
Passive Versus Active Sniffing . . . . .	139
Hardware Protocol Analyzers . . . . .	139
Network Information . . . . .	140
Active Attack Techniques . . . . .	142
Protocol Scanning . . . . .	148
What Next? . . . . .	150

**CHAPTER 6:****Denial of Service and Session Hijacking . . . . . 151**

Denial of Service . . . . .	151
Protocol Attacks . . . . .	152
Application Layer Attacks . . . . .	154
Volumetric Attacks . . . . .	155
Other DoS Attacks . . . . .	156
Common Tools Used for DoS Attacks . . . . .	159
Countermeasures to DoS and DDoS Attacks . . . . .	162
DoS in the Real World . . . . .	164
Session Hijacking . . . . .	165
The Session Hijacking Process . . . . .	167

Specific Session Hijacking Methods . . . . . 167  
Countermeasures for Session Hijacking . . . . . 170  
What Next? . . . . . 172

**CHAPTER 7:**

**Evading Security Measures . . . . . 173**

Intrusion Detection Systems . . . . . 173  
    Types of IDSs . . . . . 174  
    Intrusions . . . . . 180  
Firewalls and Honeypots . . . . . 183  
    Packet Filtering . . . . . 185  
    Stateful Packet Inspection Firewalls . . . . . 185  
    Application Gateways . . . . . 185  
    Next-Generation Firewalls (NGFWs) . . . . . 186  
    Honeypots . . . . . 187  
Virtual Private Networks . . . . . 189  
IDS Evasion Techniques . . . . . 192  
    Obfuscation . . . . . 193  
    Insertion Attacks . . . . . 194  
    Denial of Service (DoS) Attacks . . . . . 194  
    Session Splicing . . . . . 194  
    Fragment Attacks . . . . . 195  
    Time to Live Attacks . . . . . 195  
    Invalid RST Packet Attacks . . . . . 196  
    Urgency Flag . . . . . 196  
    Polymorphism . . . . . 196  
    Desynchronization . . . . . 197  
    Evasion Countermeasures . . . . . 197  
Firewall Evasion Techniques . . . . . 198  
    Firewall Identification . . . . . 200  
    Obfuscation . . . . . 200  
    Source Routing . . . . . 201  
    Tunneling . . . . . 201  
    WAF Bypass . . . . . 202  
    Firewall Evasion Tools . . . . . 202  
    Firewall Evasion Countermeasures . . . . . 203  
What Next? . . . . . 204

**CHAPTER 8:****Hacking Web Servers and Web Applications . . . . . 205**

Web Servers . . . . .	205
Web Server Architecture . . . . .	207
Web Server Issues . . . . .	208
Attacks on Web Servers . . . . .	209
Web Shells . . . . .	211
Securing the Web Server . . . . .	211
Web Applications . . . . .	214
SQL Script Injection . . . . .	216
XSS . . . . .	220
Remote File Inclusion . . . . .	221
CSRF . . . . .	221
Forceful Browsing . . . . .	222
Parameter Tampering . . . . .	222
Cookie Poisoning . . . . .	223
LDAP Injection . . . . .	223
Command Injection . . . . .	224
Web API . . . . .	224
Webhook . . . . .	224
OWASP Top 10 . . . . .	225
Web Footprinting . . . . .	227
Metasploit . . . . .	229
What Next? . . . . .	232

**CHAPTER 9:****Hacking Wireless . . . . . 233**

Wireless Technology . . . . .	233
Wireless Terminology . . . . .	234
IEEE 802.11 Standard . . . . .	235
Wi-Fi Security . . . . .	239
Bluetooth . . . . .	243
Zigbee . . . . .	243
Hacking Wireless . . . . .	245
General Attacks . . . . .	246
Wi-Fi Discovery and Scanning . . . . .	246
Rogue Access Attacks . . . . .	247
MAC Spoofing . . . . .	248
Key Reinstallation (KRACK) Attacks . . . . .	248

Jamming Attacks . . . . .	249
Geo Mapping Wi-Fi . . . . .	250
Aircrack-ng . . . . .	250
Wireless ARP Poisoning . . . . .	251
Wireless Security . . . . .	252
Bluetooth Attacks . . . . .	252
Creating a Wireless Hot Spot . . . . .	255
What Next? . . . . .	258
<b>CHAPTER 10:</b>	
<b>Hacking Mobile . . . . .</b>	<b>259</b>
Mobile Technologies . . . . .	259
Cellular Networks . . . . .	260
Cell System Components . . . . .	263
Mobile Operating Systems . . . . .	265
Mobile Threats . . . . .	274
Mobile Attack Vectors . . . . .	275
SSL Stripping . . . . .	276
Mobile Spam . . . . .	276
Open Access Points . . . . .	276
Vulnerable Sandboxing . . . . .	276
Smishing . . . . .	277
Malicious Apps . . . . .	277
Attack Software . . . . .	280
Pen Testing Methodology . . . . .	281
What Next? . . . . .	282
<b>CHAPTER 11:</b>	
<b>IOT and OT Hacking . . . . .</b>	<b>283</b>
IoT Fundamentals . . . . .	283
V2X . . . . .	287
Protocols . . . . .	287
MQTT . . . . .	289
Wired . . . . .	290
NFC . . . . .	290
Operating Systems . . . . .	290
IoT Architectures . . . . .	291
SCADA/ICS . . . . .	293

Operational Technology (OT)	294
Healthcare IoT	294
IoT Platforms	294
IOT Security and Hacking	296
IoT Security Layers	297
HVAC Exploitation	297
BlueBorne Attack	298
Mirai	298
Sybil Attacks	299
Black Hole Attacks	299
Rushing Attacks	299
Rolling Code Attacks	299
Jamming Attacks	300
Hello Flood	300
Mozi Botnet	300
Attify Zigbee	300
OWASP TOP 10	300
Ethical Hacking Process	302
Scanning	304
Attacking	307
What Next?	308

**CHAPTER 12:**

<b>Cloud Computing and Hacking</b>	<b>309</b>
Cloud Fundamentals	309
Basic Cloud Concepts	310
Cloud Security Issues	317
Serverless Computing	321
Containers	321
Cloud Computing Attacks	323
General Threats	324
Service Hijacking	325
Cross-Site Scripting	326
SOAP Attacks	326
Man-in-the-Cloud Attacks	327
DNS Attacks	327
Side-Channel Attacks	328
Authentication Attacks	328

Specific Vulnerabilities . . . . .	329
Cloud Penetration Testing . . . . .	329
What Next? . . . . .	331
<b>CHAPTER 13:</b>	
<b>Cryptography . . . . .</b>	<b>333</b>
Cryptography Concepts . . . . .	333
Symmetric Ciphers . . . . .	335
Asymmetric Ciphers . . . . .	337
Hashes . . . . .	342
Cryptographic Tools . . . . .	346
PKI . . . . .	349
Digital Certificates . . . . .	351
Digital Signatures . . . . .	352
SSL/TLS . . . . .	352
Cryptographic Attacks . . . . .	357
Cryptanalysis . . . . .	358
Rainbow Tables . . . . .	360
The Birthday Paradox . . . . .	362
DUHK . . . . .	363
Poodle . . . . .	363
DROWN . . . . .	363
CRIME . . . . .	364
What Next? . . . . .	365
<b>Glossary . . . . .</b>	<b>367</b>
<b>Index . . . . .</b>	<b>391</b>

# About the Author

**Dr. Chuck Easttom** is the author of 34 books, including several on computer security, forensics, and cryptography. He holds a doctor of science degree in cybersecurity, a Ph.D. in nanotechnology, a Ph.D. in computer science, and three master's degrees (one in applied computer science, one in education, and one in systems engineering). He is also an inventor with 23 patents. He is a senior member of both the IEEE and the ACM. He is also a Distinguished Speaker of the ACM and a Distinguished Visitor of the IEEE. Dr. Easttom is currently an adjunct professor for Georgetown University and for University of Dallas.

# Dedication

*For my wife, Teresa, who is always so supportive of my work.*  
—Chuck Easttom

# Acknowledgments

Thanks are due to Eleanor (Ellie) Bru for working on this title once more and making it as strong as it can be.

—Chuck Easttom

# About the Technical Editor

**Akhil Behl, CCIE Emeritus No. 19564**, is a passionate IT executive with key focus on cloud and security. He has 18+ years of experience in the IT industry, working across several leadership, advisory, consultancy, and business development profiles with various organizations. His technology and business specializations include cloud, security, infrastructure, data center, and business communication technologies. Currently he leads business development for cloud for a global systems integrator.

Akhil is a published author. Over the span of the past few years, he has authored multiple titles on security and business communication technologies. He has contributed as technical editor for over a dozen books on security, networking, and information technology. He has published four books with Pearson Education/Cisco Press.

He has published several research papers in national and international journals, including *IEEE Xplore*, and presented at various IEEE conferences, as well as other prominent ICT, security, and telecom events. Writing and mentoring are his passion.

He holds CCIE Emeritus (Collaboration and Security), Azure Solutions Architect Expert, Google Professional Cloud Architect, Azure AI Certified Associate, Azure Data Fundamentals, CCSK, CHFI, PMP, ITIL, VCP, TOGAF, CEH, ISM, CCDP, and many other industry certifications. He has a bachelor's degree in technology and a master's in business administration.

# We Want to Hear from You!

As the reader of this book, *you* are our most important critic and commentator. We value your opinion and want to know what we're doing right, what we could do better, what areas you'd like to see us publish in, and any other words of wisdom you're willing to pass our way.

We welcome your comments. You can email or write to let us know what you did or didn't like about this book—as well as what we can do to make our books better.

*Please note that we cannot help you with technical problems related to the topic of this book.*

When you write, please be sure to include this book's title and author as well as your name and email address. We will carefully review your comments and share them with the author and editors who worked on the book.

Email: [community@informit.com](mailto:community@informit.com)

\*Be sure to check the box indicating that you would like to hear from us to receive exclusive discounts on future editions of this product.

# Introduction

Welcome to *CEH Certified Ethical Hacker Exam Cram*. This book is designed to prepare you to take—and pass—the CEH exam. The CEH exam has become the leading introductory-level network certification available today. It is recognized by both employers and industry giants as providing candidates with a solid foundation of networking concepts, terminology, and skills.

## About *CEH Exam Cram*

Exam Crams are designed to give you the information you need to know to prepare for a certification exam. They cut through the extra information, focusing on the areas you need to get through the exam. With this in mind, the elements within Exam Crams are aimed at providing the exam information you need in the most succinct and accessible manner.

This book is organized to closely follow the actual EC-Council objectives for exam CEH v11. As such, it is easy to find the information required for each of the specified EC-Council CEH v11 objectives. The objective focus design used by this Exam Cram is an important feature because the information you need to know is easily identifiable and accessible.

Within the chapters, potential exam hot spots are clearly highlighted with Exam Alerts. They have been carefully placed to let you know that the surrounding discussion is an important area for the exam. To further help you prepare for the exam, a Cram Sheet is included that you can use in the final stages of test preparation. Be sure to pay close attention to the bulleted points on the Cram Sheet because they pinpoint the technologies and facts you will probably encounter on the test.

Finally, great effort has gone into the questions that appear throughout the chapter and the practice tests to ensure that they accurately represent the look and feel of the ones you will see on the real CEH v11 exam. Be sure, before taking the exam, that you are comfortable with both the format and content of the questions provided in this book.

# About the CEH v11 Exam

The CEH v11 exam is the newest iteration of several versions of the exam. The new CEH v11 objectives are aimed toward those who have at least two years of experience in cybersecurity and some exposure to penetration testing.

You will have a maximum of four hours to answer the 125 questions on the exam. The allotted time is quite generous, so when you finish, you will probably have time to double-check a few of the answers you were unsure of. Time is not typically an issue for this exam. The issue is ensuring that you fully understand the material in this book! Note that the exam includes 20 practical challenges. So when you see tools and techniques in this book, make sure you practice with them!

You need a minimum score of 70% to pass the CEH v11 exam. This means you can miss some questions and still pass. Your goal should be to get as many correct as you can, but if you feel like you don't really know the answers to a few questions, don't panic. Even if you get a few wrong, you can still pass the exam. The 70% is actually an estimate. CEH uses an adaptive format, described at [https://cert.eccouncil.org/faq.html?\\_ga=2.167294973.253704694.1632148579-1175590966.1632148579](https://cert.eccouncil.org/faq.html?_ga=2.167294973.253704694.1632148579-1175590966.1632148579).

## EC-Council CEH v11 Exam Topics

Table I.1 lists general exam topics (that is, objectives) and specific topics under each general topic (that is, subobjectives) for the CEH v11 exam. This table also lists the chapter in which each exam topic is covered.

TABLE I.1 **Certified Ethical Hacker Exam Topics**

Chapter	CEH Exam Objective
Chapter 1: Reconnaissance and Scanning	Introduction to ethical hacking/concepts
Chapter 1: Reconnaissance and Scanning	Footprinting and reconnaissance
Chapter 2: Enumeration and Vulnerability Scanning	Enumeration
Chapter 2: Enumeration and Vulnerability Scanning	Vulnerability analysis
Chapter 3: System Hacking	System hacking
Chapter 4: Malware	Malware threats

Chapter	CEH Exam Objective
Chapter 5: Packet Sniffing and Social Engineering	Sniffing
Chapter 5: Packet Sniffing and Social Engineering	Social engineering
Chapter 6: Denial of Service and Session Hacking	Denial of service
Chapter 6: Denial of Service and Session Hacking	Session hijacking
Chapter 7: Evading Security Measures	Evading IDS, firewalls, and honeypots
Chapter 8: Hacking Web Servers and Applications	Hacking web servers
Chapter 8: Hacking Web Servers and Applications	Hacking web applications
Chapter 8: Hacking Web Servers and Applications	SQL injection
Chapter 9: Hacking Wireless	Hacking wireless
Chapter 10: Hacking Mobile	Hacking mobile
Chapter 11: IoT and OT Hacking	IoT and OT hacking
Chapter 12: Cloud Computing and Hacking	Cloud computing
Chapter 13: Cryptography	Cryptography

## Booking and Taking the CEH v11 Exam

In order to be considered for the EC-Council CEH exam without attending official network security training, a candidate must have at least two years of work experience in the information security domain. A candidate who has the required work experience can submit an eligibility application form (see <https://cert.eccouncil.org/application-process-eligibility.html>) along with a nonrefundable fee of US\$100. The exam itself costs \$850.

When booking the exam, you need to provide the following information:

- ▶ Your name as you would like it to appear on your certificate
- ▶ Your Social Security or social insurance number
- ▶ Contact phone numbers (to be called in the event of a problem)
- ▶ Mailing address to which you want your certificate mailed

- ▶ Exam number and title
- ▶ Email address for contact purposes
- ▶ Credit card information so that you can pay online (You can redeem a voucher by calling the respective testing center.)

## What to Expect from the Exam

If you haven't taken a certification test, the process can be a little unnerving. Even if you've taken numerous tests, it is not much better. Mastering the inner mental game often can be as much of a battle as knowing the material. Knowing what to expect before heading in can make the process a little more comfortable.

Certification tests are administered on a computer system at a Pearson VUE authorized testing center. The format of the exams is straightforward: For each question you have several possible answers to choose from. The questions in this book provide a good example of the types of questions you can expect on the exam. If you are comfortable with the questions provided in the book, the test should hold few surprises. The questions vary in length. Some of them are longer scenario questions, whereas others are short and to the point. Carefully read each question; a longer question typically has a key point that will lead you to the correct answer.

Most of the questions on the CEH v11 exam require you to choose a single correct answer, but a few require multiple answers. When there are multiple correct answers, a message at the bottom of the screen prompts you with the message "Choose all that apply." Be sure to read these messages.

Also make sure you are prepared for practical questions. These questions ask you to actually use tools and techniques described in this book. This is often done as a separate test with six hours to do 20 practical problems. As you can imagine, these questions are very involved. So practice, practice, practice,....

## A Few Exam-Day Details

It is recommended that you arrive at the examination room at least 15 minutes early, although a few minutes earlier certainly would not hurt. This will give you time to prepare and will give the test administrator time to answer any questions you might have before the test begins. Many people suggest that you

review the most critical information about the test you're taking just before the test. (Exam Cram books provide a reference—the Cram Sheet, located inside the front of the book—that lists the essential information from the book in distilled form.) Arriving a few minutes early will give you some time to compose yourself and mentally review this critical information.

You will be asked to provide two forms of ID, one of which must be a photo ID. Each of the IDs you present should have a signature. You also might need to sign in when you arrive and sign out when you leave.

Be warned: The rules are clear about what you can and cannot take into the examination room. Books, laptops, note sheets, and so on are not allowed in the examination room. The test administrator will hold these items, to be returned after you complete the exam. You might receive either a wipe board or a pen and a single piece of paper for making notes during the exam. The test administrator will ensure that no paper is removed from the examination room.

## After the Test

Whether you want it or not, as soon as you finish your test, your score displays on the computer screen. In addition to the results appearing on the computer screen, a hard copy of the report prints for you. Like the onscreen report, the hard copy displays your exam results and provides a summary of how you did on each section and on each technology. If you were unsuccessful, this summary can help you determine the areas you need to brush up on.

When you pass the CEH v11 exam, you will have earned the CEH certification, and your certificate will be mailed to you within a few weeks. Should you not receive your certificate and information packet within five weeks of passing your exam, contact [feedback@eccouncil.org](mailto:feedback@eccouncil.org).

## Last-Minute Exam Tips

Studying for a certification exam is no different than studying for any other exam, but a few hints and tips can give you the edge on exam day:

- ▶ **Read all the material:** EC-Council has been known to include material not expressly specified in the objectives. This book includes additional information not reflected in the objectives to give you the best possible preparation for the examination.

- ▶ **Watch for the Exam Alerts:** The CEH v11 objectives include a wide range of technologies. Exam Tips and Notes throughout each chapter are designed to highlight exam-related hot spots. They can be your best friends when preparing for the exam.
- ▶ **Use the questions to assess your knowledge:** Don't just read the chapter content; use the exam questions in each chapter to find out what you know and what you don't. If you struggle, study some more, review, and then assess your knowledge again.
- ▶ **Review the exam objectives:** Develop your own questions and examples for each topic listed. If you can develop and answer several questions for each topic, you should not find it difficult to pass the exam.

Good luck!

## Companion Website

Register this book to get access to the Pearson Test Prep practice test software and other study materials plus additional bonus content. Check this site regularly for new and updated postings written by the author that provide further insight into the more troublesome topics on the exams. Be sure to check the box that you would like to hear from us to receive updates and exclusive discounts on future editions of this product or related products.

To access this companion website, follow these steps:

1. Go to **[www.pearsonITcertification.com/register](http://www.pearsonITcertification.com/register)** and log in or create a new account.
2. Enter the ISBN **9780137513444**.
3. Answer the challenge question as proof of purchase.
4. Click the **Access Bonus Content** link in the Registered Products section of your account page to be taken to the page where your downloadable content is available.

Please note that many of our companion content files can be very large, especially image and video files.

If you are unable to locate the files for this title by following these steps, please visit **[www.pearsonITcertification.com/contact](http://www.pearsonITcertification.com/contact)** and select the **Site Problems/Comments** option. Our customer service representatives will assist you.

# Pearson Test Prep Practice Test Software

As noted previously, this book comes complete with the Pearson Test Prep practice test software and two full exams. These practice tests are available to you either online or as an offline Windows application. To access the practice exams that were developed with this book, please see the instructions in the card inserted in the sleeve in the back of the book. This card includes a unique access code that enables you to activate your exams in the Pearson Test Prep practice test software.

## Note

The cardboard sleeve in the back of this book includes a piece of paper. The paper lists the activation code for the practice exams associated with this book. Do not lose the activation code. On the opposite side of the paper from the activation code is a unique, one-time-use coupon code for the purchase of the Premium Edition eBook and Practice Test.

## Accessing the Pearson Test Prep Software Online

The online version of this software can be used on any device with a browser and connectivity to the Internet, including desktop machines, tablets, and smartphones. To start using your practice exams online, follow these steps:

1. Go to **www.PearsonTestPrep.com**.
2. Select **Pearson IT Certification** as your product group.
3. Enter your email/password for your account. If you don't have an account on [PearsonITCertification.com](http://PearsonITCertification.com), establish one by going to **PearsonITCertification.com/join**.
4. In the My Products tab, click the **Activate New Product** button.
5. Enter the access code printed on the insert card in the back of your book to activate your product. The product is now listed in your My Products page.
6. Click the **Exams** button to launch the exam settings screen and start a practice exam.

# Accessing the Pearson Test Prep Software Offline

If you want to study offline, you can download and install the Windows version of the Pearson Test Prep software. There is a download link for this software on the book's companion website, or you can enter the following link in your browser:

**[www.pearsonitcertification.com/content/downloads/pcpt/engine.zip](http://www.pearsonitcertification.com/content/downloads/pcpt/engine.zip)**

To access the book's companion website and the software, follow these steps:

1. Register your book by going to **PearsonITCertification.com/register** and entering the ISBN **9780137513444**.
2. Respond to the challenge questions.
3. Go to your account page and select the **Registered Products** tab.
4. Click the **Access Bonus Content** link under the product listing.
5. Click the **Install Pearson Test Prep Desktop Version** link under the Practice Exams section of the page to download the software.
6. After the software downloads, unzip all the files on your computer.
7. Double-click the application file to start the installation and follow the onscreen instructions to complete the registration.
8. When the installation is complete, launch the application and click the **Activate Exam** button on the My Products tab.
9. Click the **Activate a Product** button in the Activate Product Wizard.
10. Enter the unique access code found on the card in the sleeve in the back of your book and click the **Activate** button.
11. Click **Next** and then click **Finish** to download the exam data to your application.
12. Start using the practice exams by selecting the product and clicking the **Open Exam** button to open the exam settings screen.

Note that the offline and online versions will sync together, so saved exams and grade results recorded in one version will be available to you on the other as well.

# Customizing Your Exams

When you are in the exam settings screen, you can choose to take exams in one of three modes:

- ▶ Study mode
- ▶ Practice Exam mode
- ▶ Flash Card mode

Study mode allows you to fully customize an exam and review answers as you are taking the exam. This is typically the mode you use first to assess your knowledge and identify information gaps. Practice Exam mode locks certain customization options in order to present a realistic exam experience. Use this mode when you are preparing to test your exam readiness. Flash Card mode strips out the answers and presents you with only the question stem. This mode is great for late-stage preparation, when you really want to challenge yourself to provide answers without the benefit of seeing multiple-choice options. This mode does not provide the detailed score reports that the other two modes provide, so it is not the best mode for helping you identify knowledge gaps.

In addition to these three modes, you will be able to select the source of your questions. You can choose to take exams that cover all of the chapters, or you can narrow your selection to just a single chapter or the chapters that make up specific parts in the book. All chapters are selected by default. If you want to narrow your focus to individual chapters, simply deselect all the chapters and then select only those on which you wish to focus in the Objectives area.

You can also select the exam banks on which to focus. Each exam bank comes complete with a full exam of questions that cover topics in every chapter. The two exams printed in the book are available to you, as are two additional exams of unique questions. You can have the test engine serve up exams from all four banks or just from one individual bank by selecting the desired banks in the exam bank area.

You can make several other customizations to your exam from the exam settings screen, such as the time of the exam, the number of questions, whether to randomize questions and answers, whether to show the number of correct answers for multiple answer questions, or whether to serve up only specific types of questions. You can also create custom test banks by selecting only questions that you have marked or questions on which you have added notes.

## Updating Your Exams

If you are using the online version of the Pearson Test Prep software, you should always have access to the latest version of the software as well as the exam data. If you are using the Windows desktop version, every time you launch the software, it will check to see if there are any updates to your exam data and automatically download any changes made since the last time you used the software. This requires that you be connected to the Internet at the time you launch the software.

Sometimes, due to a number of factors, the exam data might not fully download when you activate your exam. If you find that figures or exhibits are missing, you might need to manually update your exams.

To update a particular exam you have already activated and downloaded, simply select the Tools tab and click the Update Products button. Again, this is only an issue with the desktop Windows application.

If you wish to check for updates to the Windows desktop version of the Pearson Test Prep exam engine software, simply select the Tools tab and click the Update Application button. Doing so allows you to ensure that you are running the latest version of the software engine.

## Assessing Exam Readiness

Exam candidates never really know whether they are adequately prepared for the exam until they have completed about 30% of the questions. At that point, if you are not prepared, it is too late. The best way to determine your readiness is to work through all of the quizzes in each chapter and review the foundation and key topics presented in each chapter. It is best to work your way through the entire book unless you can complete each subject without having to do any research or look up any answers.

## Premium Edition eBook and Practice Tests

This book also includes an exclusive offer for 70% off the Premium Edition eBook and Practice Tests edition of this title. Please see the coupon code included with the cardboard sleeve for information on how to purchase the Premium Edition.

*This page intentionally left blank*

## CHAPTER 6

# Denial of Service and Session Hijacking

**This chapter covers the following CEH exam objectives:**

- ▶ Understand various DoS attacks
- ▶ Be able to implement DoS countermeasures
- ▶ Use common DoS tools
- ▶ Comprehend session hijacking techniques
- ▶ Implement session hijacking countermeasures

## Denial of Service

Denial of service (DoS) attacks, as the name suggests, are not about breaking into a system but rather about denying legitimate users the opportunity to use the system. In most cases, a DoS attack is easy to execute. This makes DoS attacks a very serious problem. Every technology has limits; if you can exceed those limits, then you can make a system unusable.

## CramSaver

If you can correctly answer these CramSaver questions, save time by skimming the Exam Alerts in this section and then completing the Cram Quiz at the end of the section. If you are in any doubt at all, read everything in this chapter.

1. Sharia has detected an attack on her company web server. In this attack, the message body is sent quite slowly. What best describes this attack?
  - A. Slowloris
  - B. HTTP post
  - C. Smurf
  - D. PDoS
2. Todd is concerned about DoS attacks against his network. He is particularly worried about attacks that used malformed ICMP packets. What type of attack is Todd concerned about?
  - A. PoD
  - B. Teardrop
  - C. PDoS
  - D. Smurf
3. How does SPI help mitigate DoS?
  - A. By detecting anomalies in the stream such as too many SYN packets from the same IP source
  - B. By blocking fake IP addresses and sending their traffic to a black hole
  - C. By carefully examining each packet and tracing back its origin
  - D. By encrypting traffic, preventing many attacks

## Answers

1. **B.** This is an HTTP post attack. Slowloris involves partial HTTP requests.
2. **A.** This is a PoD (ping of death) attack.
3. **A.** SPI (stateful packet inspection) looks at not just the individual packet but all the packets that came before it in the session. It can detect a range of DoS attacks.

## Protocol Attacks

A protocol attack tries to exploit some vulnerability in the protocol being used. Exploiting such vulnerabilities can cause a system to become unresponsive. The magnitude of a protocol attack is measured in packets per second (pps).

**ExamAlert**

**Objective** For the CEH exam, make certain you know the categories of attacks as well as how the magnitude is measured for each category.

## TCP SYN Flood Attacks

A TCP SYN flood attack is an older type of DoS attack, but it illustrates the concepts of denial of service quite well. This particular type of attack depends on the hacker's knowledge of how connections to a server are made. When a session is initiated between a client and a server in a network using TCP, a packet is sent to the server with a 1-bit flag called a SYN flag set. (SYN is short for synchronize.) This packet is asking the target server to synchronize communications. The server allocates appropriate resources and then sends to the client a packet with both the SYN (synchronize) and ACK (acknowledge) flags set. The client machine is then supposed to respond with an ACK flag set. This process, called a three-way handshake, is summarized as follows:

1. The client sends a packet with the SYN flag set.
2. The server allocates resources for the client and then responds with the SYN and ACK flags set.
3. The client responds with the ACK flag set.

There have been a number of well-known SYN flood attacks on web servers. This attack type is popular because any machine that engages in TCP communication is vulnerable to it—and all machines connected to the Internet engage in TCP communications. Such communication is obviously the entire reason for web servers. The easiest way to block DoS attacks is via firewall rules.

## Teardrop Attacks

Fragmentation attacks in general try to prevent targets from being able to reassemble packet fragments. They usually involve sending a large number of fragmented packets to the target. A teardrop attack is a specific type of fragmentation attack. In a teardrop attack, the attacker sends a fragmented message, where the two fragments overlap in ways that make it impossible to reassemble them properly without destroying the individual packet headers. Therefore, when the victim attempts to reconstruct the message, the message is destroyed. This causes the target system to halt or crash. There are a number of variations on the basic teardrop attack, such as TearDrop2, Boink, targa, Nestea Boink, NewTear, and SYNdrop.

## ACK Flood Attacks

As the name suggests, an ACK flood attack involves sending a flood of TCP ACK packets. Normally an ACK packet is an acknowledgment of something being received, be it data or a synchronization request. Some devices or services are stateful, which means they process each packet. When a target receives a flood of ACK packets, it tries to process it but, because it is not actually an acknowledgment of anything, it can overwhelm the target.

## TCP State Exhaustion Attacks

There are a variety of state exhaustion attacks, and the idea behind them all is essentially the same. They attack weaknesses in Layers 3 and 4 of the protocol stack and overconsume resources. Invalid name queries to a DNS server are a type of state exhaustion attack. TCP state exhaustion attacks operate on some aspect of the TCP handshake. For example, a SYN flood attack is a type of TCP state exhaustion.

## Application Layer Attacks

Application layer DoS attacks work to consume a given application's resources. The magnitude is usually measured in requests per second (rps). Basically, overwhelming a target server with too many requests is the basis for most application layer attacks.

## HTTP Post DoS Attacks

An HTTP post DoS attack involves sending a legitimate HTTP post message. Part of the post message is the content length, which indicates the size of the message to follow. In this type of attack, the attacker sends the actual message body at an extremely slow rate. The web server is then hung as it waits for the message to complete. For more robust servers, the attacker needs to use multiple HTTP post attacks simultaneously.

## Slowloris Attacks

A Slowloris attack is another attack against web servers. The attacker sends partial HTTP requests. When the target receives these requests, it opens a connection and waits for the requests to complete. But rather than complete a request, the attacker continues to send multiple partial requests. Eventually, the

server has opened so many connections that it exhausts its maximum connection pool limit and can no longer respond to legitimate requests.

## Volumetric Attacks

All volumetric attacks seek to overwhelm the target with an overwhelming number of packets. These attacks are not particularly sophisticated or difficult. They simply overwhelm the target. The magnitude of a volumetric attack is usually measured in bits per second (bps).

## Smurf IP Attacks

A UDP attack is a type of volumetric attack, and a Smurf attack is a very popular version of a DoS attack. An ICMP (Internet Control Message Protocol) packet is sent out to the broadcast address of the network. The network responds by echoing the packet out to the network hosts, which then send it to the spoofed source address. Also, the spoofed source address can be anywhere on the Internet, not just on the local subnet. A hacker who can continually send such packets can cause the network itself to perform a DoS attack on one or more of its member servers. This attack is clever and rather simple. The only problem for the hacker is getting the packets started on the target network. This task can be accomplished via some software, such as a virus or Trojan horse, that begins sending the packets.

In a Smurf attack, there are three people/systems involved: the attacker, the intermediary (who can also be a victim), and the victim. The attacker first sends an ICMP echo request packet to the intermediary's IP broadcast addresses. Since this is sent to the IP broadcast address, many of the machines on the intermediary's network receive this request packet and send back an ICMP echo reply packet. If all the machines on a network are responding to this request, the network becomes congested, and there may be outages.

The attacker impacts the third party—the intended victim—by creating forged packets that contain the spoofed source address of the victim. Therefore, when all the machines on the intermediary's network start replying to the echo request, those replies flood the victim's network. Thus, another network becomes congested and could become unusable. This type of attack is illustrated in Figure 4.4 in Chapter 4, “Malware.”

## UDP Flood Attacks

The UDP flood attack is another example of a volumetric attack. Keep in mind that UDP (User Datagram Protocol) is a protocol that does not verify each packet's delivery. In a UDP flood attack, the attacker sends a UDP packet to a random port on a target system. When the target system receives a UDP packet, the attacker determines what application is listening on the destination port. Then, if the attacker wants to attack that application, he or she just starts a flood of UDP packets to the IP address and port. If enough UDP packets are delivered to ports on the target, the system becomes overloaded trying to determine awaiting applications (which do not exist) and then generating and sending packets back.

## ICMP Flood Attacks

The ICMP flood attack is another volumetric attack. ICMP flood attacks are usually accomplished by broadcasting a large number of either pings or UDP packets. Like other flood attacks, the idea is to send so much data to the target system that the system slows down. If it can be forced to slow down enough, the target will time out (i.e., not send replies fast enough) and be disconnected from the Internet. This type of attack is far less effective against modern computers than it was against older ones. Even a low-end desktop PC now has 4 GB (or more) of RAM and a dual-core processor, making it difficult to generate enough pings to knock the machine offline. However, at one time, this was a very common form of DoS attack.

## Ping of Death Attacks

A ping of death attack, often simply called a PoD attack, is accomplished by sending malformed ICMP packets (e.g., sending a packet that is 65,536 bytes in size). RFC 791 specifies a maximum packet size of 65,535 bytes. A PoD attack can cause a vulnerable system to crash.

## Other DoS Attacks

Some DoS attack types don't fit neatly into one of the previously discussed categories. These attacks can nonetheless be quite effective against target systems.

## Multi-Vector Attacks

As the name suggests, a multi-vector attack is a combination of two or more of the other attacks (e.g., launching a SYN flood attack and a teardrop attack at the same time). Another method is to launch one type of attack and then, after a time, to shift to a different attack vector. This method can overcome DoS countermeasures the target may have implemented.

## DHCP Starvation Attacks

DHCP (Dynamic Host Configuration Protocol) is used to dynamically assign IP addresses to systems on a network. If an attacker floods a target network with DHCP requests for dynamic IP addresses, the attacker can completely exhaust the address space allocated by the DHCP server. Then legitimate users cannot get an IP address assigned and thus cannot connect to the network. There are tools such as gobblers that can do this for an attacker.

## PDoS Attacks

Though not terribly common, it is possible to have a DoS attack that leaves the system either inoperable or needing the operating system completely reinstalled. These are referred to as *permanent denial of service (PDoS) attacks*, or phlashing. Such attacks usually involve DoS attacks on a device's firmware.

## Registration DoS Attacks

A registration DoS attack is a very simplistic attack used against websites. The attacker creates a script or program that just keeps registering fake users on a website. This is one reason many registration websites use CAPTCHA.

## Login DoS Attacks

Login DoS attacks are similar to registration DoS attacks and also frequently use scripts or programs. The attacker tries to overload the login process by continually sending login information. This can overwhelm the target system or at least slow it down. Many websites use CAPTCHA to prevent automated login attempts.

## DDoS Attacks

Perhaps the most common form of DoS attack today is the *DDoS attack*. This type of attack is accomplished by getting various machines to attack the target. This is commonly done by sending out a Trojan horse that causes infected computers to attack a specified target at a particular date and time—which is a very effective way to execute a DDoS attack on any target. In this form of DDoS attack, the attacker does not have direct control of the various machines used in the attack. These machines are simply infected by some malware that causes them to participate in the attack on a particular date and at a particular time.

Another method is to use a botnet to orchestrate a DDoS attack. A *botnet* is a network of computers that have been compromised by an attacker so that the attacker has control of the computers. This is often accomplished via delivery of a Trojan horse. However, unlike in the previous DDoS example, the attacker has direct control over the attacking machines in the botnet.

A botnet usually has a command and control (C&C) that controls the various compromised machines. Then the botnet can be used for whatever the attacker wishes. DDoS is only one application of a botnet. Password cracking and sending phishing emails are other uses. The compromised systems can be attacked in any of the ways that malware is usually distributed: via phishing emails, compromised websites, vulnerable target systems, etc.

## Peer-to-Peer Attacks

While peer-to-peer (P2P) apps have become quite popular, so have P2P DoS attacks. One method is to force the client to disconnect from the legitimate P2P hub and get the client to connect to the attacker's fake hub. There have also been massive DDoS attacks on peer-to-peer networks. In addition, attackers attempt to exploit flaws in the protocols used, such as the Direct Connect (DC++) protocol that is used to share files between peer-to-peer clients.

## Distributed Reflection DoS Attacks

As previously stated, DDoS attacks are becoming more common. Most such attacks rely on getting various machines (i.e., servers or workstations) to attack the target. A distributed reflection DoS attack is a special type of DoS attack. As with all such attacks, it is accomplished by the hacker getting a number of machines to attack the selected target. However, this attack works a bit differently than other DoS attacks. Rather than getting computers to attack the target, this method tricks Internet routers into attacking a target.

Many of the routers on the Internet backbone communicate on port 179, particularly using BGP (Border Gateway Protocol) to exchange routing information. A distributed reflection DoS attack exploits that communication line and gets routers to attack a target system. What makes this attack particularly wicked is that it does not require the routers in question to be compromised in any way. The attacker does not need to get any sort of software on a router to get it to participate in the attack. Instead, the hacker sends a stream of packets to the various routers, requesting a connection. The packets have been altered so that they appear to come from the target system's IP address. The routers respond by initiating connections with the target system. What occurs is a flood of connections from multiple routers, all hitting the same target system. This has the effect of rendering the target system unreachable.

### ExamAlert

**Objective** For the CEH exam, you must be able to fully describe each of the attacks discussed in this section. It is worth your time to memorize these attacks.

## Common Tools Used for DoS Attacks

As with any of the other security issues discussed in this book, you will find that hackers have at their disposal a vast array of tools in the DoS arena. While it is certainly well beyond the scope of this book to begin to categorize or discuss all of these tools, a brief introduction to just a few of them will prove useful.

### LOIC

LOIC (Low Orbit Ion Cannon) is one of the most widely known DoS tools available. It has a very easy-to-use graphical user interface, shown in Figure 6.1.

This tool is very easy to use. As you can see in Figure 6.1, it simply requires the user to enter the target URL or IP address and then begin the attack. Fortunately, this tool also does nothing to hide the attacker's address and thus makes it relatively easy to trace the attack back to its source. It is an older tool but still widely used today. There is a tool similar to this named HOIC, which we discuss later in this section.

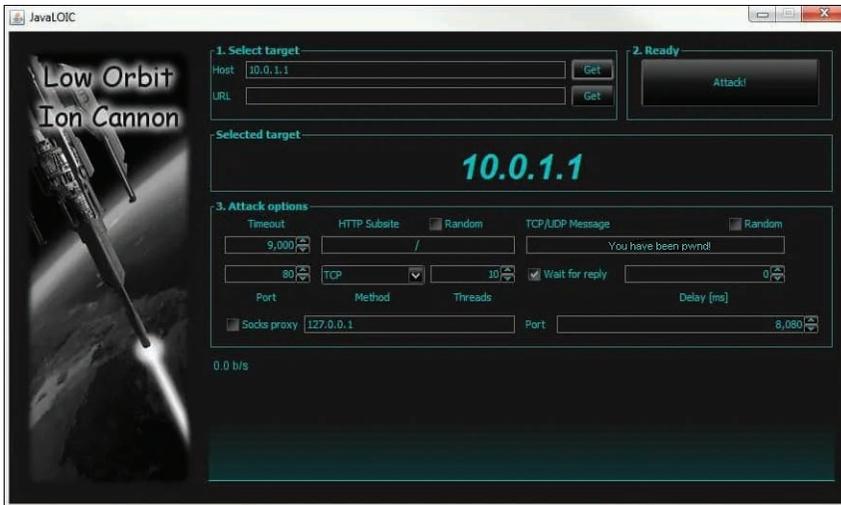


FIGURE 6.1 LOIC

## DoSHTTP

DoSHTTP is another tool that is simple to use. You select the target, the agent (i.e., the browser type to simulate), the number of sockets, and the requests and then start the flood. You can see this in Figure 6.2.

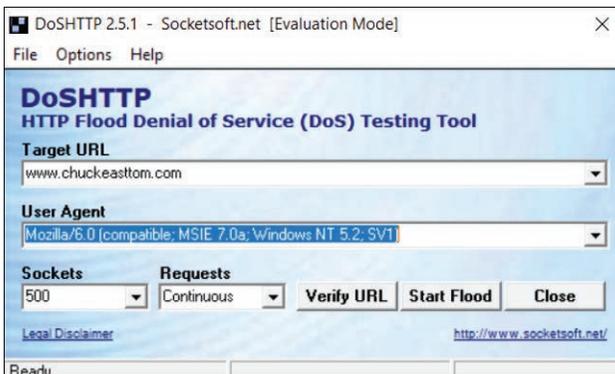


FIGURE 6.2 DoSHTTP

## XOIC

XOIC, which is similar to LOIC, has three modes: send a message, execute a brief test, or start a DoS attack. You can see these options in Figure 6.3.

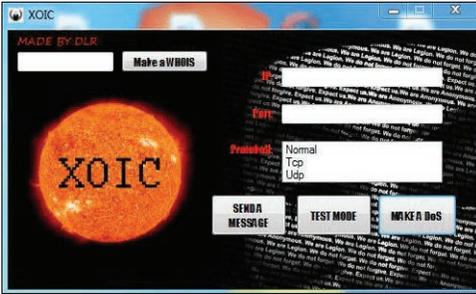


FIGURE 6.3 XOIC

Like LOIC, XOIC is very easy to use. It is just a point-and-click graphical user interface. Even attackers with minimal skill can launch a DoS attack using XOIC.

## HOIC

HOIC (High Orbit Ion Cannon) was developed by the Anonymous collective as an improvement on LOIC. It is available at <https://sourceforge.net/projects/highorbitioncannon/>. Although HOIC was meant to be more powerful than LOIC, it still has a very simple user interface, which can be seen in Figure 6.4.

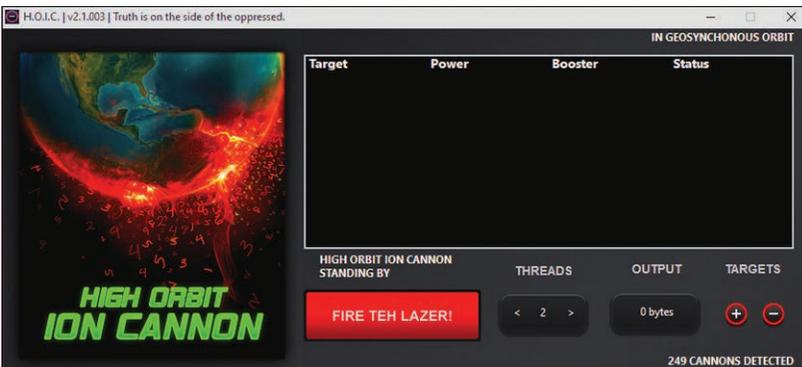


FIGURE 6.4 HOIC

## Other Tools for DoS and DDoS Attacks

There are many other tools for DoS and DDoS. A few are listed here:

- ▶ **Hulk:** A Python script, available at <https://github.com/grafov/hulk>
- ▶ **DAVOSET:** A command line tool for DoS attacks, available at <https://github.com/MustLive/DAVOSET>
- ▶ **R-U-Dead-Yet (RUDY):** Tool that uses POST attacks, available at <https://sourceforge.net/projects/r-u-dead-yet/>
- ▶ **AnDOSid:** An Android tool for DoS, available at <https://www.hackingtools.in/free-download-andosid/>

## Countermeasures to DoS and DDoS Attacks

The CEH exam will ask you about countermeasures to DoS and DDoS attacks. A few of them have already been discussed. For example, CAPTCHA can mitigate web DoS attacks. In general, three categories can be used in the case of overwhelming attacks:

- ▶ Simply shut down the targeted service. This is usually not a good choice, as it essentially means capitulating to the attack.
- ▶ Keep the critical services functioning by stopping noncritical services and use those resources for the critical services.
- ▶ Absorb the attack. This method is popular with internet service providers (ISPs; for an added charge). When the ISP detects a DoS or DDoS attack in progress, it allocates additional bandwidth to absorb that attack.

A good antivirus approach coupled with regular system updates can prevent one of your systems from becoming compromised and becoming part of a bot-net. Filtering incoming and outgoing traffic to your network can also mitigate DoS attacks. Rate limiting any service or IP address so that it can consume only a finite percentage of resources also helps mitigate DoS attacks.

Honeypots are gaining popularity in deflecting all sorts of attacks, including DoS attacks. A *honeypot* is a fake system set up for the sole purpose of attracting hackers. Essentially, if a honeypot looks realistic enough, the attacker may go after it rather than after a real system.

Robust network configuration can also help mitigate DoS attacks. Load balancing critical services is a very good first step in helping mitigate DoS attacks. Throttling or limiting traffic for a given service can also help. Being able to drop incoming requests when a certain threshold is reached is also helpful.

There is actually a standard for filtering. RFC 3704, “Ingress Filtering for Multihomed Networks,” is a standard to help limit the impact of DDoS attacks by blocking any traffic with spoofed IP addresses.

Black hole filtering is another common technique. A *black hole* is a network location where traffic is simply discarded/dropped, typically by sending traffic to an IP address that is not in use. When a DoS attack is detected, suspected DoS traffic can be forwarded to the network black hole.

As mentioned earlier in this book, the CEH exam has a strong emphasis on Cisco. You therefore need to be familiar with a couple Cisco commands that can help mitigate DoS attacks:

- ▶ **access-list access-list-number {deny | permit} tcp any destination destination-wildcard:** Defines an IP extended access list
- ▶ **ip tcp Intercept list access-list-number:** Enables TCP intercept

There are also a number of devices that can be added to a network to help mitigate DoS attacks, including:

- ▶ FortiDDoS-1200B
- ▶ Cisco Guard XT 5650
- ▶ Cisco IP reputation filtering
- ▶ Check Point DDoS Protector
- ▶ Active Reach DDoS mitigation device <https://activereach.net/solutions/network-security/protect/ddos-mitigation/perimeter-ddos-mitigation/>
- ▶ Verizon DDoS Shield <https://www.verizon.com/business/products/security/network-cloud-security/ddos-shield/>
- ▶ Netscout DDoS protection <https://www.netscout.com/solutions/ddos-protection>
- ▶ F5 DDoS protection <https://www.f5.com/solutions/application-security/ddos-protection>
- ▶ DDoS Mitigation <https://www.a10networks.com/products/thunder-tps/>

There are also software solutions that can help mitigate DoS attacks:

- ▶ **Anti DDoS Guardian:** <http://www.beethink.com>
- ▶ **DOSarrest's DDoS Protection Service:** <https://www.dosarrest.com>
- ▶ **DDoS-GUARD:** <https://ddos-guard.net>

SPI (stateful packet inspection) is an excellent way to mitigate DoS attacks. Many modern firewalls use SPI. These types of firewalls not only apply rules to each packet but maintain the state of communication between the client and the server. As an example of how this mitigates attacks, the firewall realizes that multiple SYN packets are coming from the same IP address and then blocks those packets. This is one major reason SYN floods are not seen much today. In addition, next-generation firewalls (NGFWs) combine traditional firewall capabilities and other functions, such as those of an application firewall or an intrusion detection system/prevention system (IDS/IPS). Using a modern advanced firewall is an excellent way to mitigate DoS and DDoS attacks.

### ExamAlert

**Objective** For the CEH exam, be sure you are very familiar with the DoS/DDoS countermeasures.

## DoS in the Real World

According to the security consulting firm Calyptix Security, the first quarter of 2018 set records for DoS and DDoS attacks. This included a massive DDoS attack against the GitHub site on February 28, 2018, peaking at 1.3 Tbps. This illustrates how effective and damaging these attacks can be, for the amount of data sent in DoS attacks is growing all the time.

One creative example comes from 2017. In February 2017, a new DDoS attack vector emerged. Attackers used memcache, a database caching system, to amplify traffic volume. A request could be amplified by a factor of several thousand by using this method. The aforementioned GitHub attack involved memcaching. This illustrates that new methods of DoS are being developed, and you should expect to see them out in the real world (though not on the CEH exam).

---

## Cram Quiz

Answer these questions. The answers follow the last question. If you cannot answer these questions correctly, consider reading this section again until you can.

1. What Cisco command enables TCP intercept?
  - A. `access-list access-list-number {deny | permit} tcp any destination destination-wildcard`
  - B. `ip tcp Intercept list access-list-number`
  - C. `ip tcp Intercept-enable`
  - D. `access-list access-list-number intercept-enable`
2. Which attack is based on an ICMP (Internet Control Message Protocol) packet sent to the broadcast address of the network?
  - A. Teardrop attack
  - B. Slowloris attack
  - C. Smurf attack
  - D. PDoS attack
3. What is the most effective countermeasure for registration DoS attacks?
  - A. Using an SPI firewall
  - B. Using CAPTCHA
  - C. Encrypting traffic
  - D. Using Cisco configuration

## Answers

1. **C.** If you are not familiar with Cisco router/switch commands, this can be one of the more challenging parts of the CEH exam.
2. **B.** A Smurf attack works by sending a flood of broadcast messages to the target system router, impersonating the target machine's IP address.
3. **B.** This is one reason so many sites use CAPTCHA: It prevents scripts from running registration DoS attacks.

---

## Session Hijacking

Conceptually, session hijacking is quite simple. The goal is to find an authentic TCP session and to take over that session. This is possible because, generally speaking, the session is authenticated at the beginning. Clearly, session hijacking is easier with some systems than with others.

## CramSaver

If you can correctly answer these CramSaver questions, save time by skimming the Exam Alerts in this section and then completing the Cram Quiz at the end of the section. If you are in any doubt at all, read everything in this chapter.

1. What type of session hijacking begins with the attacker attempting to get the user to authenticate to the target server, using a session ID prechosen by the attacker?
  - A. Man-in-the-browser
  - B. Session fixation
  - C. Session replay
  - D. Man-in-the-middle
2. Mohammed has discovered malware on a machine. This malware has an interface like a web browser library and appears to be intercepting browser calls. What type of attack is this?
  - A. Trojan horse
  - B. Session fixation
  - C. Man-in-the-middle
  - D. Man-in-the-browser
3. Gerard, who is a web developer, is concerned about session hijacking and is using the HTTPOnly flag. What does this flag do?
  - A. Permits only HTTP and not HTTPS
  - B. Only allows cookies to be accessed via HTTP
  - C. Prevents scripts running on the client
  - D. Logs all HTTP request queries and nothing else

## Answers

1. **B.** This is a classic description of session fixation.
2. **D.** This is a man-in-the-browser attack. A man-in-the-browser attack is a special type of man-in-the-middle attack, and it is possible that the malware was delivered via a Trojan horse, but the best answer is man-in-the-browser.
3. **B.** Allowing cookies to be accessible only via HTTP prevents client-side scripts or malware from manipulating cookies.

Several factors can make a system more vulnerable to session hijacking. Having a weak session ID generation algorithm is a common issue. This makes predicting or guessing session IDs much easier. Having no expiration or having a very long expiration on a session also increases the possibilities for an attacker.

There are two types of session hijacking:

- ▶ **Active:** In active session hijacking, the attacker identifies an active session and takes over that session.
- ▶ **Passive:** In passive hijacking, the attacker just sniffs the traffic. This is not true session hijacking but is identified as passive session hijacking by the CEH exam.

## The Session Hijacking Process

The CEH exam defines a process of five steps for session hijacking. An attacker won't always follow this process, but you should know it for the CEH exam:

1. Sniff the traffic going to the target so you can learn about how sessions are handled. This involves using a packet sniffer such as Wireshark or tcpdump (discussed in Chapter 2, “Enumeration and Vulnerability Scanning”) to see what is being sent between a client and a server.
2. Monitor the traffic to determine if you can predict the next valid sequence number or session ID.
3. Break the connection to the legitimate client.
4. Take over the session, posing as that client using a session and/or sequence ID that will appear legitimate to the target server.
5. Perform command injection, or inject packets into the target server.

## Specific Session Hijacking Methods

There are a number of mechanisms for getting a session token in order to take over a session. If data is unencrypted, you may be able to derive this information through packet sniffing. Or if the target uses a simple session ID, such as a date/time stamp, it is easy to predict the next session ID. However, there are other methods, as described in the following subsections.

### Web Session Hijacking

If the target is a web server, cross-site scripting (XSS) might be able to derive a token. XSS uses malicious JavaScript. The most typical method of XSS is to

insert the JavaScript into a website in a place where users normally enter text for other users to read, such as product reviews. However, it is also possible to send malicious scripts as part of an email. Or a phishing email may be able to get a user to a website that has malicious JavaScript built in.

Cross-site request forgery (CSRF) attacks an active session with a trusted site. The attacker might have a malicious link on some compromised site. Often users have more than one browser open at a time. If a user visits a compromised site and clicks on the link while they also have an active session open, the attacker can get the user's session ID for the target site. Then the attacker sends requests to the target website, posing as the user. Both XSS and CSRF are listed as OWASP (Open Web Application Security Project) top 10 vulnerabilities.

Session fixation is another method of session hijacking. The attacker tries to get the user to authenticate to the target server, using a session ID prechosen by the attacker. This works only if the server has a very weak session ID generation scheme—one that the attacker can readily emulate to produce a session ID that appears legitimate to the server.

Session replay attacks are still covered on the CEH exam, but they rarely work today. Such an attack involves simply intercepting authentication packets and re-sending them to the target. Although modern authentication methods make such attempts ineffective, you should be aware of this type of attack for the CEH exam.

Variations of the man-in-the-middle attack work whether the target is a web server or not. The attacker sits between the client and server, via a fake access point, a fake website, or using one of many other methods. One variation of the man-in-the-middle attack is the forbidden attack. This is targeted to older, flawed implementations of TLS. Older TLS versions would sometimes reuse a nonce (short for *number only used once*) during the TLS handshake, which made them vulnerable. The attacker would sniff the nonce and then use it to authenticate to the server. (Remember that TLS [Transport Layer Security] is the successor to SSL [Secure Sockets Layer] since 1999. However, many people still simply say SSL when they mean TLS.)

With a man-in-the-browser attack, malicious software is on the client machine and behaves like a software library or component that the browser uses. Then that malware intercepts data going out from the browser. This is a variation of a man-in-the-middle attack. A number of malicious Chrome extensions and Firefox add-ins have been man-in-the-browser malware.

Other attacks specifically target flaws in protocols such as SSL/TLS. CRIME (Compression Ratio Info-Leak Made Easy) is one such attack. Essentially, the compression used in earlier versions of TLS was flawed and could lead to data leaks. There have been similar issues such as the BREACH attack. BREACH (Browser Reconnaissance and Exfiltration via Adaptive Compression of Hypertext) is an improvement over CRIME that attacks an issue with the gzip compression algorithm.

## Network Session Hijacking

TCP/IP hijacking is the process of taking over a TCP connection between a client and a target machine. It often uses spoofed packets. If the attacker can cause the client machine to pause or hang, the attacker can pretend to be the client and send spoofed packets. To do this, the attacker must know the packet sequence number and be able to use the next sequence number. Modern authentication methods periodically re-authenticate, often rendering this type of attack unsuccessful.

RST hijacking is another method. The attacker uses an RST (reset) packet to spoof the client's IP address, but also uses the correct sequence number to cause the connection to reset. This resets the connection and allows the attacker to take over that session. A number of tools help craft custom packets, such as Packet Builder from Colasoft.

Some attackers simply inject forged packets into a data stream, spoofing the source IP address. With this method, the attacker cannot see the response, and it is thus called *blind hijacking*.

UDP hijacking is similar to TCP/IP hijacking, but using UDP packets. The attacker spoofs the server, sending the client a forged UDP reply, so the client connects to the attacker's machine.

There are a number of tools that can help perform any of these attacks. One of the most widely used—and heavily emphasized on the CEH exam—is Burp Suite. Burp Suite can be downloaded from <https://portswigger.net/burp>. There is a free community edition, and there are professional and enterprise editions. Using the default settings, the main screen of the Burp Suite community edition looks as shown in Figure 6.5.

The CEH exam won't test you on all the uses of Burp Suite, but it is probably a good idea to get familiar with this tool as it is very helpful in conducting penetration tests. Fortunately, the internet is replete with tutorials for Burp Suite.

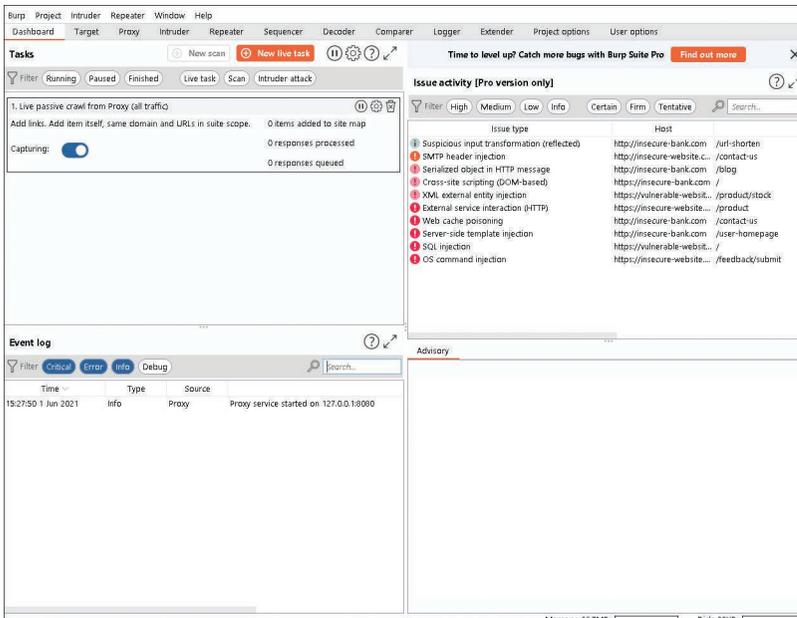


FIGURE 6.5 Burp Suite

There are other tools that can accomplish similar tasks:

- ▶ **OWASP ZAP:** A tool often touted as a website vulnerability scanner, which also allows you to intercept and alter packets, available at [www.owasp.org](http://www.owasp.org)
- ▶ **WebSploit Framework:** A tool explicitly designed for man-in-the-middle attacks, available at <https://sourceforge.net/projects/websploit/>
- ▶ **Bettercap:** A tool that is also useful for Bluetooth hacking, available at <https://www.bettercap.org>
- ▶ **DroidSheep:** A session hijacking tool that runs on Android, available at <https://droidsheep.info>
- ▶ **DroidSniff:** An Android tool designed for security scanning that can also be used for man-in-the-middle attacks, available at <https://github.com/evozi/DroidSniff>

## Countermeasures for Session Hijacking

There are many different methods for mitigating session hijacking. One of the easiest is to encrypt all data in transit. This includes using SSH for any secure communications. In addition to ensuring that communications are encrypted,

you should ensure that you are using up-to-date methods. Earlier in this chapter, we discussed attacks against TLS vulnerabilities. Using the latest TLS version (which is 1.3 as of this writing) will mitigate or eliminate most of them.

Never use session ID numbers that are easy to predict. They should be random numbers generated by a robust random number generation algorithm. Also ensure that session IDs are transmitted securely and that sessions time out.

Strong authentication techniques such as Kerberos will prevent at least some session hijacking attacks. Also ensure that you are using the normal antimalware protections, such as antivirus and intrusion prevention systems.

Web developers can combat session hijacking attacks on their websites by using a variety of additional techniques. For example, cookies with session information should be stored securely (encrypted), and a website should use the HTTPOnly attribute. HTTPOnly means the cookie can only be accessed with the HTTP protocol; any script or malware on the client computer cannot access it.

Websites should check to see that all traffic for a given session is coming from the same IP address that initiated the session. This will at least detect many session hijacking techniques. Always have timeouts for cookies, sessions, and so on. The shorter, the better—but, of course, it is important to keep user satisfaction in mind.

HTTP Strict-Transport-Security (HSTS) can also help mitigate session hijacking attacks. HSTS is a server setting that requires browsers to connect with HTTPS rather than HTTP. This makes all traffic encrypted. HTTP Public Key Pinning (HPKP) allows a web client to associate a specific public key with a specific server, so it is harder for an attacker to spoof a legitimate web server.

Always use secure protocols. Table 6.1 summarizes them.

TABLE 6.1 **Secure Protocol Replacement**

Insecure Protocol	Secure Replacement
HTTP	HTTPS
Telnet, rlogin	SSH
Any TCP/IP traffic	Encrypt with a VPN
FTP	SFTP or FTPS

### ExamAlert

**Objective** For the CEH exam, make certain you are very familiar with all of these secure protocols.

---

## Cram Quiz

Answer these questions. The answers follow the last question. If you cannot answer these questions correctly, consider reading this section again until you can.

1. John is logged into his company web portal using a secure session. However, he is simultaneously logged into a site that he did not realize has been compromised. What attack might John be vulnerable to?
  - A. Session fixation
  - B. Man-in-the-middle
  - C. Cross-site scripting
  - D. Cross-site request forgery
2. What is the key aspect of RST hijacking?
  - A. Intercepting RST packets
  - B. Spoofing RST packets to pretend to be the client
  - C. Spoofing RST packets from the client to reset the session
  - D. Blocking RST packets to force the session to stay active
3. What is the basis of a CRIME attack?
  - A. Flaws in TLS compression
  - B. Flaws in gzip compression
  - C. Flaws in TLS authentication nonces
  - D. Flaws in cryptographic key generation

## Answers

1. **D.** This is a very good description of cross-site request forgery.
  2. **C.** Causing the session to reset, making it seem like the client sent the reset, can allow the attacker to attempt to hijack the session.
  3. **A.** CRIME (Compression Ratio Info-Leak Made Easy) is an attack that targets flaws in TLS compression. The compression used in earlier versions of TLS was flawed and could lead to data leaks.
- 

## What Next?

If you want more practice on this chapter's exam objectives before you move on, remember that you can access all of the Cram Quiz questions on the book web page. The next chapter covers specific methods for avoiding security measures.

# Index

## Numerics

---

**3GPP (3rd Generation Partnership Project), 262**

**5G, 235, 262**

## A

---

**ACK flood attack, 154**

**active assessment, 58**

**active IDS (intrusion detection system), 176**

**active reconnaissance, 23. See also port scanners**

banner grabbing, 29

packets, 23, 24

scans

    IDLE, 24–25

    SSDP, 25

    TTL and TCP scanning, 29–30

**active sniffing, 139**

**Advanced Encryption Package, 346**

**Advanced Image Search, Google, 5**

**advanced persistent threats, 103**

**Advanced Search, Google, 5**

**AES (Advanced Encryption Standard), 336**

**Aircrack-ng, 250–251**

**algorithms, 68, 334**

**Android, 267–270**

attack software, 280–281

malicious apps, 277–279

policies, 269–270

rooting, 268–269

vulnerability scanners, 270

**antennas, 241–242**

**antivirus, 120–122, 162**

**Apache, 207**

**APIs (application programming interfaces), 224****application gateway, 185–186****application layer attacks, 154**

HTTP post DoS, 154

Slowloris, 154–155

**apps, malicious, 277–279****architecture**

IoT, 291–293

web server, 207–208

**archive.org, 10–11****armored virus, 110****ARP poisoning/spoofing, 145, 251****assessment, 58, 62****asymmetric ciphers, 337**

Diffie-Hellman, 341–342

elliptic curve cryptography, 342

RSA, 337–341

**attacks. See also DoS (denial of service) attacks**

ARP poisoning/spoofing, 145

Bluetooth, 252–254

brute force, 69

cloud computing, 323

authentication, 328

DNS, 327

man-in-the-cloud, 327

service hijacking, 325

session riding, 325

side-channel, 328

SOAP, 326–327

XSS (cross-site scripting), 326

cryptographic, 357–358

chosen plaintext, 359

cipher-only, 359

CRIME (Compression Ratio Info-leak Made Easy), 364

DROWN (Decrypting RSA with Obsolete and Weakened eNcryption), 363

frequency analysis, 358

known plaintext, 358

POODLE (Padding Oracle On Downgraded Legacy Encryption), 363

related-key, 359

DHCP starvation, 144

dictionary, 69

DNS poisoning, 147–148

forceful browsing, 222

fragment, 195

HTTP response splitting, 210–211

insertion, 194

invalid RST packet, 196

IoT (Internet of Things)

Attify Zigbee and, 300

black hole, 299

BlueBorne, 298

Hello flood, 300

jamming, 300

Mirai, 298

Mozi botnet, 300

rolling code, 299

rushing, 299

Sybil, 299

IRDP spoofing, 147

MAC

flooding, 143

spoofing, 145–147

macOS, 76

man-in-the-browser, 168

man-in-the-middle, 168

mobile device, 275

smishing, 277

spam, 276

SSL stripping, 276

pass the hash, 74

session fixation, 90

time to live, 195–196

web application

command injection, 224

cookie poisoning, 223

CSRF (cross-site request forgery), 221–222

- forceful browsing, 222
- LDAP injection, 223
- parameter tampering, 222
- webhooks, 224–225
- XSS (cross-site scripting), 220–221
- web cache poisoning, 211
- Wi-Fi
  - key reinstallation, 248–249
  - MAC spoofing, 248
  - rogue access, 247–248
  - wireless network, 246, 249
- Attify Zigbee, 300. See also Zigbee**
- auditpol.exe, 83**
- authentication, 171**
  - cloud computing and, 328
  - Wi-Fi, 239–241

## B

---

- backdoor, 99**
- backups, malware and, 117**
- banner grabbing, 29, 227–228**
- batch files, 113**
- beStorm, 306**
- BGP (Border Gateway Protocol), 148**
- BinText, 117**
- birthday paradox, 362–363**
- Bitdefender, 305**
- black box testing, 19**
- black hat hacker, 19**
- black hole**
  - attacks, 299
  - filtering, 163
- Blowfish, 336**
- BlueBorne attacks, 298**
- Bluetooth, 243**
  - attacks, 252–254
  - IoT and, 289
  - open access points, 276
  - tools, 254
- boot sector virus, 110**
- botnets, 103, 158, 300**
- brute force attack, 69**
- BSSID (basic service set identifier), 235**
- BullGuard Mobile Security, 266**
- Burp Suite, 169**
- BYOD (bring-your-own-device), 266–267**

## C

---

- CAM (content addressable memory), 140**
- CCTT (covert channel tunneling tool) Trojan, 96**
- CEH**
  - cloud security, 319–320
  - methodology, 66–67
- cellular communication. See also mobile devices**
  - 3GPP (3rd Generation Partnership Project), 262
  - 5G, 235, 262
  - BYOD (bring-your-own-device), 266–267
  - cell types, 261
  - components, 263–265
  - EDGE (Enhanced Data Rates for GSM Evolution), 234, 262
  - GSM (Global System for Mobile Communication), 234, 261
  - LTE (Long Term Evolution), 234, 262
  - MDM (mobile device management), 266
  - mobile operating systems, 265
    - Android, 267–270
    - general security measures, 265–266
    - iOS, 270–273
    - rooting, 268–269
  - SIM (subscriber identity module), 234
  - UMTS (Universal Mobile Telecommunications System), 234, 261–262

**censys.io, 10****chosen plaintext attack, 359****cipher-only attack, 359****Clear\_Event\_Viewer\_Logs.bat, 83****ClearLogs, 83****cloud computing, 310**

## attacks, 323

authentication, 328

DNS, 327

man-in-the-cloud, 327

service hijacking, 325

session riding, 325

side-channel, 328

SOAP, 326–327

XSS (cross-site scripting), 326

CEH and, 319–320

community, 313

containers, 321

definitions, 311

general threats, 324

HPC (high performance computing),  
314

hybrid, 313

multi cloud, 314

penetration testing, 329–330

platforms, 310–311

private, 312

providers, 314

public, 312, 313

security

standards, 318–319

tools, 320–321

serverless computing, 321

virtualization, 314–315

components, 316–317

IaaS (infrastructure as a service),  
315

PaaS (platform as a service), 315

SaaS (software as a service),  
315–316

VM (virtual machine), 315

vulnerabilities, 329

**cluster virus, 109****Colasoft, 35–36****command shell Trojan, 96****commands**

HTTP, 215

Metasploit, 231

NTP, 49

operating system, 17–18

ping, 18, 39

Snort, 176

tskill, 113

**community cloud computing, 313****companion virus, 110****computer-based social engineering,  
129–130**

fake security apps, 131–132

pharming, 131

phishing, 130

countermeasures, 131

spear, 130–131

**containers, 321****Contiki, 291****cookie(s)**

poisoning, 223

session hijacking and, 171

**countermeasures**

banner grabbing, 29

DoS (denial of service) attacks, 162

antivirus, 162

devices, 163–164

filtering, 163

honeypots, 162

software solutions, 164

SPI (stateful packet inspection),  
164

dumpster diving, 135

firewall evasion, 203

IDS evasion, 197

insider threat, 133

phishing, 131, 135–136

session hijacking, 170–171

social engineering

- job rotation, 134
    - multifactor authentication, 134
    - separation of duties, 134
  - TTL and TCP scanning, 30
  - covering your tracks**
    - auditpol.exe, 83
    - log wiping, 83–84
    - Metasploit, 84
  - creating**
    - hotspots
      - using a Windows laptop, 255–256
      - using Wi Fi Honey, 256–257
      - using Wi Fi Pineapple, 256–257
    - packets, 35
    - viruses, 111–113
  - CRIME (Compression Ratio Info-leak Made Easy), 364**
  - cryptanalysis, 358**
    - chosen plaintext attack, 359
    - cipher-only attack, 359
    - CRIME (Compression Ratio Info-leak Made Easy), 364
    - differential, 360
    - DROWN (Decrypting RSA with Obsolete and Weakened eNcryption), 363
    - frequency analysis, 358
    - known plaintext attack, 358
    - linear, 359–360
    - POODLE (Padding Oracle On Downgraded Legacy Encryption), 363
    - rainbow tables, 360–362
    - related-key attack, 359
  - crypters, , 99**
  - crypto ransomware, 100. See also ransomware**
  - cryptography, 334**
    - asymmetric ciphers, 337
      - Diffie-Hellman, 341–342
      - elliptic curve cryptography, 342
      - RSA, 337–341
    - attacks, 357–358
    - digital certificates, 351–352
    - digital signatures, 352
    - hashes, 342–343
      - birthday paradox and, 362–363
      - calculators, 344–345
      - MAC (message authentication code), 343–344
      - MD5, 343
      - SHA (Secure Hash Algorithm), 343
    - PKI (public key infrastructure), 350–351
    - SSL/TLS, 352–355
    - symmetric ciphers, 335
      - AES (Advanced Encryption Standard), 336
      - Blowfish, 336
      - DES (Data Encryption Standard), 335
      - RC4, 336
      - Twofish, 336
    - tools, 347–348
      - Advanced Encryption Package, 346
      - Cryptool, 347
  - CryptoLocker, 100–101**
  - Cryptool, 347**
  - CryptoWall, 100–101**
  - CSRF (cross-site request forgery), 168, 221–222**
  - CVE (Common Vulnerabilities and Exposures), 59–60**
  - CVSS (Common Vulnerability Scoring System), 59**
- 
- ## D
- DarkHorse Trojan Virus Maker, 98**
  - Darwin, 271**
  - data stealing Trojan, 96**
  - DCS (distributed control system), 293**
  - DDoS (distributed denial of service) attack, 158**
  - DeepSound, 81–82**

defacement Trojan

**defacement Trojan, 96**

**default**

- credentials, 228–229
- passwords, 58, 70

**delivery process, malware, 104–105**

**DES (Data Encryption Standard), 335**

**destructive Trojan, 96**

**desynchronization, 197**

**DHCP (Dynamic Host Configuration Protocol), 140–141**

- messages, 141–142
- starvation, 144, 157

**dictionary attack, 69**

**differential cryptanalysis, 360**

**Diffie, Whitfield, 341**

**Diffie-Hellman, 341–342**

**digital**

- certificates, 351–352
- signatures, 352

**dipole antenna, 242**

**directional antenna, 241**

**distributed reflection DoS attacks, 158–159**

**DLL (dynamic linked library)**

- hijacking, 74–75
- injection, 75, 106

**DNS (Domain Name System), 142**

- cloud computing and, 327
- domains, 17
- hijacking, 209–210
- poisoning, 147–148
- records, 16–17
- zone transfers, 49–50

**DoS (denial of service) attacks, 151, 209**

- application layer, 154
  - HTTP post DoS, 154
  - Slowloris, 154–155
- countermeasures, 162
  - antivirus, 162
  - devices, 163–164
  - filtering, 163

honeypots, 162

software solutions, 164

SPI (stateful packet inspection), 164

DDoS, 158

DHCP starvation, 157

distributed reflection, 158–159

IDS evasion, 194

login, 157

multi-vector, 157

PDoS, 157

peer-to-peer, 158

protocol, 152

ACK flood, 154

TCP state exhaustion, 154

TCP SYN flood, 153

teardrop, 153

in the real world, 164

registration, 157

tools, 162

DoSHTTP, 160

HOIC (High Orbit Ion Cannon), 161

LOIC (Low Orbit Ion Cannon), 159

XOIC, 161

volumetric, 155

ICMP flood, 156

ping of death, 156

Smurf, 155

UDP flood, 156

**DoSHTTP, 160**

**download scanning, 121**

**DroidSheep, 280**

**DROWN (Decrypting RSA with Obsolete and Weakened eNcryption), 363**

**DSSS (Direct-Sequence Spread Spectrum), 235, 260**

**DUHK (don't use hardcoded keys), 363**

**dumpster diving, 19, 69, 129, 135**

**dynamic analysis, 117, 119**

**E**

**EDGE (Enhanced Data Rates for GSM Evolution), 234, 262**

**eLiteWrap, 97–98**

**elliptic curve cryptography, 342**

**email, 12**

- domains, 13
- headers, 12–13
- scanning, 120–121
- tracking, 13

**encoding schemes, web server attacks and, 210**

**enumeration**

- LDAP, 48–49
- NETBIOS and, 46–47
- user, 49

**evasion**

- firewall, 30–31, 198
  - countermeasures, 203
  - firewall identification, 200
  - obfuscation, 200–201
  - source routing, 201
  - tools and, 202
  - tunneling, 201–202
  - WAF bypass, 202
- IDS, 30–31
  - countermeasures, 197
  - desynchronization, 197
  - DoS (denial of service) attacks, 194
  - fragment attacks, 195
  - insertion attacks, 194
  - invalid RST packet attacks, 196
  - obfuscation, 193–194
  - polymorphism, 196–197
  - session splicing, 194
  - time to live attacks, 195–196
  - urgency flag, 196
- malware, 106–107

**exploit kits, 104**

**external assessment, 58**

**F**

**FaaS (function as a service), 321**

**FaceNiff, 281**

**fake security apps, 131–132**

**Feistel cipher, 336**

**FHSS (Frequency-Hopping Spread Spectrum), 235, 260**

**file**

- extension virus, 110
- scanning, 121
- virus, 109

**fileless malware**

- net command and, 102–103
- PowerShell and, 102
- WMI (Windows Management Interface) and, 102

**filters, 10, 163**

**firewalls, 183–184**

- application gateways, 185–186
- configurations, 184
- evading, 30–31
- evasion techniques, 198
  - countermeasures, 203
  - firewall identification, 200
  - obfuscation, 200–201
  - source routing, 201
  - tools and, 202
  - tunneling, 201–202
  - WAF bypass, 202
- NAT (network address translation), 184
- next-generation, 186
- packet filtering, 185
- stateful packet inspection, 185

**flags, 23, 24**

- hping, 28
- ping command, 39
- TCP scanning and, 36–37

**footprinting, 2–3, 227. See also reconnaissance**

- Netcraft, 227
- Nmap, 228

forceful browsing

**forceful browsing, 222**

**Foren6, 306**

**fragment attacks, 195**

**frequency analysis, 358**

**FTP Trojan, 96**

## G

---

**geo mapping, 250**

**geographic searches, 6–7**

**geolocation, IP addresses and, 15–16**

**Google hacking, 3–6**

Advanced Image Search, 5

Advanced Search, 5

**Google Hacking Database, 6**

**gray hat hacker, 19**

**GrayFish, 77**

**GSM (Global System for Mobile Communication), 234, 261**

## H

---

**hackers**

black hat, 19

gray hat, 19

white hat, 19

**HackRF One, 306**

**hardware protocol analyzers, 139–140**

**hash(es), 2, 67, 342–343**

birthday paradox and, 362–363

calculators, 344–345

harvesting, 74

MAC (message authentication code), 343–344

MD5, 343

rainbow table, 67–69

SHA (Secure Hash Algorithm), 343

**headers, email, 12–13**

**healthcare IoT (Internet of Things), 294**

**Hellman, Martin, 67, 341**

**Hello flood, 300**

**heuristic scanning, 121**

**HOIC (High Orbit Ion Cannon), 161**

**honeypots, 162, 187–188**

**Horse Pill, 77**

**host/network assessment, 58**

**hotspot, creating**

using a Windows laptop, 255–256

using Wi Fi Honey, 256–257

using Wi Fi Pineapple, 256–257

**HPC (high performance computing), 314**

**hping, 28–29**

**HSTS (HTTP Strict-Transport-Security), 171**

**HTTP, 353**

commands, 215

messages, 216

post DoS attack, 154

response splitting, 210–211

**human-based social engineering**

dumpster diving, 129

reverse social engineering, 129

shoulder surfing, 128–129

tailgating, 128

**hybrid cloud computing, 313**

## I

---

**IaaS (infrastructure as a service), 315**

**ICMP (Internet Control Message Protocol)**

flood attack, 156

messages, 37–38

scanning, 37–41

**IDA Decompiler, 118**

**IDLE scans, 24–25**

**IDS (intrusion detection systems), 173, 179–180. See also intrusions**

active, 176

anomalies, 175

classification, 175

evasion techniques, 30–31

countermeasures, 197

- desynchronization, 197
- DoS (denial of service) attacks, 194
- fragment attacks, 195
- insertion attacks, 194
- invalid RST packet attacks, 196
- obfuscation, 193–194
- polymorphism, 196–197
- session splicing, 194
- time to live attacks, 195–196
- urgency flag, 196
- for mobile devices, 180
- passive, 176
- Snort, 176–179
  - commands, 176
  - executing, 177
  - rules, 178–179
- types of, 174–175
- IEEE 802.11 standard, 235**
  - 802.11a, 236
  - 802.11ax, 237–238
  - 802.11b, 236
  - 802.11g, 237
  - 802.11n, 237
  - 802.11n 2009, 237
  - channels, 238
- inference-based assessment, 58**
- insertion attacks, 194**
- insider threats, 132–133**
- InSpy, 7**
- internal assessment, 58**
- Internet Worm Maker Thing, 112**
- intrusions, 180**
  - file, 181
  - network, 181
  - system, 181
- invalid RST packet attacks, 196**
- iOS, 270–273**
  - attack software, 280–281
  - Darwin, 271
  - jailbreaking, 271–272
  - layers, 271
  - malicious apps, 277–279
- IoT (Internet of Things), 284**
  - applications, 286
  - architecture, 297
  - architectures, 285–286, 291
  - attacks
    - Attify Zigbee and, 300
    - black hole, 299
    - BlueBorne, 298
    - Hello flood, 300
    - jamming, 300
    - Mirai, 298
    - Mozi botnet, 300
    - rolling code, 299
    - rushing, 299
    - Sybil, 299
  - DCS (distributed control system), 293
  - ethical hacking process
    - attacking, 307
    - gain access, 303
    - information gathering, 302
    - launch attacks, 303
    - maintain access, 304
    - vulnerability scanning, 303
  - healthcare, 294
  - HVAC exploitation, 297
  - operating systems, 290
    - Contiki, 291
    - RIOT, 291
    - RTOS (real-time operating system), 291
    - Zephyr, 291
  - operational technology (OT), 294
  - OWASP top 10 vulnerabilities, 225–226
  - PCB (printed circuit board), 285
  - platforms, 285, 294–295
  - protocols, 287
    - Bluetooth, 289
    - LoRa (Long Range), 288

MQTT (Message Queue Telemetry Transport), 289

NFC (Near-Field Communication), 290

RuBee, 288

Wi-Fi, 287

Zigbee, 287–288

Z-Wave, 289

SCADA (Supervisory Control and Data Acquisition), 293

security layers, 297

sensors, 284

types of, 284

V2X (vehicle to anything), 287

vulnerability scanners

beStorm, 306

Bitdefender, 305

Foren6, 306

HackRF One, 306

IoTsploit, 304

MultiPing, 305

Retina IoT Scanner, 305

Thingful, 306

wired, 290

**IoTsploit, 304**

**IP addresses, geolocation, 15–16**

**IPS (intrusion prevention systems), 30–31**

**IPsec, 190–191**

**IPv4, 24–25**

**IPv6, 25**

**IRDP (ICMP Router Discovery Protocol) spoofing, 147**

**ISM (Industrial, Scientific, and Medical) band, 235**

## J

---

jailbreaking, 271–272

jamming, 249, 300

job rotation, social engineering and, 134

## K

---

**Kali Linux, 19**

Metasploit, 84–86

recon-ng, 20

**key(s)**

DUHK and, 363

generation, 339–341

reinstallation attacks, 248–249

**known plaintext attack, 358**

## L

---

**L2TP (Layer 2 Tunneling Protocol), 190**

**LanHelper, 45**

**LDAP (Lightweight Directory Access Protocol)**

injection, 223

network mapping, 48–49

**linear cryptanalysis, 359–360**

**LinkedIn, 7, 133**

**Linux**

hashes, 67

Kali, 19

Metasploit, 84–86

recon-ng, 20

NTP commands, 49

rootkits, 77–78

Singularity, 321

user enumeration commands, 49

web servers, 207

Wi Fi Honey and, 256–257

**LLMNR (Link-Local Multicast Name Resolution) poisoning, 74**

**log wiping, 83–84**

**logic bombs, 114**

**login DoS attacks, 157**

**LOIC (Low Orbit Ion Cannon), 159**

**Lookout Personal, 265**

**lookups**

nslookup and, 18

Whois, 15

**LoRa (Long Range), 288**

**LTE (Long Term Evolution), 234, 262**

## M

**MAC (media access control) address, 140**

flooding, 143

spoofing, 145–147, 248

**MAC (message authentication code), 343–344**

**macOS attacks, 76**

**macro virus, 109**

**malware, 76, 94**

advanced persistent threats, 103

analysis, 117–120

backdoor, 99

botnet, 103

components, 105

evasion techniques, 106–107

exploit kits, 104

fileless

net command and, 102–103

PowerShell and, 102

WMI (Windows Management Interface) and, 102

indicators, 116

logic bombs, 114

mobile devices and, 277–279

protecting against, 116

backups, 117

sheep dipping, 116

ransomware, 100–101

rootkits, 101

spread of, 104–105

spyware, 99–100

tools, 99–100

types of, 100

Trojan horse, 94–95

crypters, 99

delivery process, 96–97

TCP ports, 95

tools, 97–98

types of, 96

wrappers, 98–99

**Malwarebytes for Android, 266**

**man-in-the-browser attacks, 168**

**man-in-the-cloud attacks, 327**

**man-in-the-middle attacks, 168**

**MD5, 343**

**MDM (mobile device management), 266**

**memory-resident virus, 109**

**messages**

DHCP, 141–142

HTTP, 216

ICMP, 37–38

NETBIOS, 46–47

**metadata, extraction tools, 11–12**

**metamorphic virus, 110**

**Metasploit, 25, 84–86, 229–230**

commands, 231

SMB scanning, 86–88, 230–231

**methodology**

CEH, 66–67

IoT hacking

attacking, 307

gain access, 303

information gathering, 302

launch attacks, 303

maintain access, 304

vulnerability scanning, 303

mobile device pen testing, 281–282

scanning, 44

social engineering, 127–128

**MIMO-OFDM (Multiple Input/Multiple Output Orthogonal Frequency-Division Multiplexing), 235**

**Mirai, 298**

**mobile devices**

attacks, 275

smishing, 277

spam, 276

SSL stripping, 276

BYOD (bring-your-own-device), 266–267

mobile devices

- IDS (intrusion detection systems), 180
- malicious apps, 277–279
- MDM (mobile device management), 266
- operating systems, 265
  - Android, 267–270
  - general security measures, 265–266
  - iOS, 270–273
- pen testing methodology, 281–282
- rooting, 268–269
- sandboxing, 276

**mobile-based social engineering, 132**

**monitoring**

- email, 13
- websites, 12

**Morris, Robert T., "A Weakness in the 4.2BSD Unix TCP/IP Software", 89**

**Mozi botnet, 300**

**MQTT (Message Queue Telemetry Transport), 289**

**multi cloud, 314**

**multifactor authentication, 134**

**multi-partite virus, 109**

**MultiPing, 305**

**multi-vector attacks, 157**

## N

**NAT (network address translation), 184**

**NBT-NS (NetBIOS Name Service) poisoning, 74**

**Nessus, 60–61**

**net command, 102–103**

**NETBIOS, messages and responses, 46–47**

**Netcat, 227**

**Netcraft, 135, 227**

**netcraft.com, 8**

**network mapping, 45**

- LanHelper and, 45
- LDAP and, 48–49

nbtstat scans, 47

NETBIOS messages and responses, 46–47

NTP and, 49

SNMP and, 48

tools, 45

user enumeration commands, 49

zone transfers, 49–50

**Network Pinger, 40–41**

**Network Spoofer, 281**

**Neustar, 16**

**Nexpose, 61**

**NFC (Near-Field Communication), 290**

**NGFWs (next-generation firewalls), 186**

**Nmap, 26–28**

-D flag, 31

footprinting and, 228

**nslookup, 18**

**NTFS, ADS (Alternate Data Stream), 75**

**NTP (Network Time Protocol), network mapping, 49**

## O

**obfuscation, 193–194, 200–201**

**OFDM (Orthogonal Frequency-Division Multiplexing), 235**

**omnidirectional antenna, 241**

**OpenStego, 83**

**operating systems, IoT (Internet of Things). See also Android; iOS**

Contiki, 291

RIOT, 291

RTOS (real-time operating system), 291

Zephyr, 291

**operational technology (OT), 294**

**OSINT (open-source intelligence), 14–17**

**overwriting/cavity virus, 110**

**OWASP top 10, 225–226, 300–302**

**P****PaaS (platform as a service), 315****packets, 23**

- creating, 35
- filtering, 185
- flags, 23, 24
- scanning
  - tcpdump, 52–53
  - Wireshark, 54–55
- sniffing. *See* sniffing

**parabolic grid antenna, 241****parameter tampering, 222****pass the hash, 74****passive assessment, 58****passive IDS (intrusion detection system), 176****passive reconnaissance, 3**

- email tracking, 13
- geographic searches, 6–7
- Google hacking, 3–6
  - Advanced Image Search, 5
  - Advanced Search, 5
- IP addresses and, 15–16
- operating system commands, 17–18
- recon-ng, 20
- useful websites, 8–11
- website monitoring, 12

**passive sniffing, 139****password(s)**

- cracking, 69, 71, 211
  - hash harvesting, 74
  - pass the hash attacks, 74
  - pwdump, 70
  - RainbowCrack, 70–71
- default, 58, 70
- hashes, 67
- rainbow tables, 67–69, 360–362

**PCB (printed circuit board), 285****PDos (permanent denial of service) attack, 157****peer-to-peer attacks, 158****penetration testing, cloud, 329–330****pharming, 131****phishing, 127, 130**

- countermeasures, 131, 135–136
- Netcraft and, 135
- spear, 130–131

**PhishTank.com, 131****ping command, 18, 39****ping of death attack, 156****PKI (public key infrastructure), 350–351****plaintext attack**

- chosen, 359
- known, 358

**polymorphic virus, 110****polymorphism, 196–197****POODLE (Padding Oracle On Downgraded Legacy Encryption), 363****port scanners, 26–28, 30. *See also* Nmap; scanning****PowerShell, fileless malware, 102****PPTP (Point-to-Point Tunneling Protocol), 190****private cloud computing, 312****protecting against malware, 116**

- analysis, 117–120
- backups, 117
- sheep dipping, 116

**protocols. *See also* DoS (denial of service) attacks; hardware protocol analyzers**

- IoT (Internet of Things), 287
  - Bluetooth, 289
  - LoRa (Long Range), 288
  - MQTT (Message Queue Telemetry Transport), 289
- NFC (Near-Field Communication), 290
- RuBee, 288
- Wi-Fi, 287
- Zigbee, 287–288
- Z-Wave, 289

## protocols

- scanning, 148
- secure, 171
- sniffing and, 139
- Wi-Fi, 239

**proxy**

- server, 31
- Trojan, 96

**public cloud computing, 312, 313****pwdump, 70****Q-R****QuickStego, 81–82****rainbow tables, 67–69, 360–362****RainbowCrack, 70–71****ransomware, 100–101****RC4, 336**

**reconnaissance, 2–3. See also**  
**active reconnaissance; passive**  
**reconnaissance**

- active, 23
  - banner grabbing, 29
  - packets and, 23
  - TTL and TCP scanning, 29–30
- passive, 3
  - email tracking, 13
  - geographic searches, 6–7
  - Google hacking, 3–6
  - IP addresses and, 15–16
  - operating system commands, 17–18
  - recon-ng, 20
  - useful websites, 8–11
  - website monitoring, 12

**recon-ng, 20****reflector antenna, 242****regional internet registries, 15****registration DoS attacks, 157****related-key attack, 359****relational databases, 217****remote access Trojan, 96****Retina IoT Scanner, 305****reverse social engineering, 129****RFC 3864 "Header Field Registration", 12****RFI (remote file inclusion), 221****Rijndael cipher, 336****RIOT, 291****RIPEDM (RACE Integrity Primitives Evaluation Message Digest), 343****Rivest, Ronald, 67****rogue access, 247–248****rolling code attacks, 299****rooting, 268–269****rootkits, 77–78, 101****RSA, 337–341****RST hijacking, 169****RTOS (real-time operating system), 291****RuBee, 288****rushing attacks, 299****Ryuk, 101****S****SaaS (software as a service), 315–316****SAINT, 61****salt algorithm, 68****sandboxing, 276****SCADA (Supervisory Control and Data Acquisition), 293**

**scanning, 23–24, 33. See also port**  
**scanners**

- download, 121
- email and attachment, 120–121
- file, 121
- heuristic, 121
- hping, 28–29
- ICMP, 37–41
- IDLE, 24–25
- malware, 120–121
- methodology, 44
- Netcat and, 44–45
- packets

- tcpdump, 52–53
- Wireshark, 54–55
- protocol, 148
- sandbox approach, 121
- SMB, 86–88
- source routing, 44
- SSDP, 25
- stealth, 27
- TCP, 29–30, 34–37
- TTL, 29–30
- vulnerability, 58
  - Nessus, 60–61
  - Nexpose, 61
  - SAINT, 61
- Wi-Fi, 246–247
- scoring vulnerabilities, 59**
  - CVE, 59–60
  - CVSS, 59
- searches. See also websites**
  - archive.org, 10–11
  - censys.io and, 10
  - people, 7
  - Shodan, 9–10
  - Whois, 14–15
- SEO (search engine optimization), 104**
- separation of duties, social engineering and, 134**
- serverless computing, 321**
- service hijacking, 325**
- session**
  - hijacking, 89–91, 165, 167
    - countermeasures, 170–171
    - five-step process for, 167
    - network, 169–170
    - tools, 170
    - web, 167–169
  - riding, 325
  - splicing, 194
- SET (Social-Engineer Toolkit), 136**
- SHA (Secure Hash Algorithm), 343**
- sheep dipping, 116**
- Shodan, 9–10**
- shoulder surfing, 19, 69, 128–129**
- side-channel attacks, 328**
- SIM (subscriber identity module), 234**
- Singularity, 321**
- Slowloris attack, 154–155**
- SMB scanning, 86–88, 148, 230–231**
- smishing, 277**
- Smurf attack, 155**
- sniffing, 139**
  - active, 139
  - hardware protocol analyzers, 139–140
  - network information and, 140–142
  - passive, 139
- SNMP (Simple Network Management Protocol)**
  - network mapping and, 48
- Snort, 176**
  - commands, 176
  - executing, 177
  - rules, 178–179
- SOAP (Simple Object Access Protocol) attacks, 326–327**
- social engineering, 69, 124, 127, 133–134. See also dumpster diving; phishing**
  - approaches, 124–126
  - computer-based, 129–130
    - countermeasures, 131
    - fake security apps, 131–132
    - pharming, 131
    - phishing, 130
    - spear phishing, 130–131
  - countermeasures, 135
    - job rotation, 134
    - multifactor authentication, 134
    - separation of duties, 134
  - four-step methodology, 127–128
  - greed and, 127
  - human-based, 124–127
    - dumpster diving, 129

## social engineering

- reverse social engineering, 129

- shoulder surfing, 128–129

- tailgating, 128

- insider threats, 132–133

- mobile-based, 132

- tools, 136–137

- use of authority, 126

**software**

- attack, 280–281

- DoS attack mitigation, 164

**source routing, 44, 201****spam, 276****SPAN (Switched Port Analyzer), 140****sparse infector virus, 110****spear phishing, 130–131****SPI (stateful packet inspection), 164, 185****spoofing, 74, 169**

- ARP, 251

- DNS, 147–148

- IRDP, 147

- MAC, 145–147, 248

**SpyDealer, 278–279****spyware, 80, 99–100****SQL injection, 216–220****SSDP (Simple Service Discovery Protocol), 25****SSID (service set identifier), 235****SSL (Secure Sockets Layer)**

- stripping, 276, 352–355

- TLS and, 352–355

**static analysis, 117, 119****stealth scans, 27****steganography, 80–81**

- DeepSound, 81–82

- OpenStego, 83

- QuickStego, 81–82

**Sybil attacks, 299****symmetric ciphers, 335**

- AES (Advanced Encryption Standard), 336

- Blowfish, 336

- DES (Data Encryption Standard), 335

- RC4, 336

- Twofish, 336

**Sysinternals tool suite, 120****system hacking**

- ADS (Alternate Data Stream), 75

- covering your tracks

- auditpol.exe, 83

- log wiping, 83–84

- Metasploit, 84

- DLL hijacking, 74–75

- DLL injection, 75

- LLMNR/NBT-NS poisoning, 74

- macOS attacks, 76

- malware, 76

- Metasploit, 84–86

- password cracking, 67–69, 70, 71

- pass the hash, 74

- pwdump, 70

- RainbowCrack, 70–71

- rootkits, 77–78

- session hijacking, 89–91

- SMB scanning, 86–88

- spyware, 80

- steganography, 80

- DeepSound, 81–82

- OpenStego, 83

- QuickStego, 81–82

- tools, 80–81

**T****tailgating, 128****TAP (test access point), 140****TCP (Transmission Control Protocol)**

- scanning, 29–30, 34–37

- state exhaustion attacks, 154

- SYN flood attack, 153

**tcpdump, 52–53****TCP/IP, hijacking, 169**

**teardrop attack, 153**

**TeraBIT, 111–112**

**Thingful, 306**

**THSS (Time-Hopping Spread Spectrum), 260**

**Timbuktu, 99**

**time to live attacks, 195–196**

**Tinley, David, 114**

**TLS (Transport Layer Security), SSL and, 352–355**

**tools. See also commands**

auditpol.exe, 83

BinText, 117

Bluetooth, 254

cloud security, 320–321

Colasoft, 35–36

cryptography, 347–348

Advanced Encryption Package,  
346

Cryptool, 347

DoS attack, 162

DoSHTTP, 160

HOIC (High Orbit Ion Cannon),  
161

LOIC (Low Orbit Ion Cannon),  
159

XOIC, 161

dynamic analysis, 119

firewall evasion, 202

hardware protocol analyzers, 139–  
140

hping, 28–29

IDA Decompiler, 118

InSpy, 7

LanHelper, 45

log wiping, 83–84

metadata extraction, 11–12

Metasploit, 25, 74, 84–88

mobile security, 265–266

nbtstat, 47

Netcat, 44–45, 227

Netcraft, 227

network mapping, 45

network packet capture, 52

tcpdump, 52–53

Wireshark, 54–55

Network Pinger, 40–41

Nmap, -D flag, 31

nslookup, 18

operating system commands, 17–18

password cracking, 71

pwdump, 70

RainbowCrack, 70–71

ping command, 18

port scanners, Nmap, 26–28

recon-ng, 20

scanning, 23–24

session hijacking, 90–91, 170

Shodan, 9–10

Snort, 176–179

social engineering, 136–137

spyware, 99–100

static analysis, 119

steganography, 80–81

DeepSound, 81–82

OpenStego, 83

QuickStego, 81–82

Sysinternals, 120

TCP scanning, 34–37

traceroute, 17–18

Trojan horse

crypters, 99

DarkHorse Trojan Virus Maker,  
98

eLiteWrap, 97–98

wrappers, 98–99

virus-creating, 111–112

vulnerability scanners, 62

beStorm, 306

Bitdefender, 305

Foren6, 306

HackRF One, 306

IoTsploit, 304

MultiPing, 305

Nessus, 60–61

- Nexpose, 61
- Retina IoT Scanner, 305
- SAINT, 61
- Thingful, 306
- Whois, 15
- Wi-Fi
  - hacking, Aircrack-ng, 250–251
  - scanning, 246–247
- Winrtgen, 69

**Tor Browser, 31–32****traceroute, 17–18****tree-based assessment, 58****Trojan horses, 95**

- crypters, 99
- delivery process, 96–97
- TCP ports, 94–95
- tools
  - DarkHorse Trojan Virus Maker, 98
  - eLiteWrap, 97–98
- types of, 96
- wrappers, 98–99

**tskill command, 113****TSR (terminate and stay) virus, 110****TTL scans, 29–30****tunneling, 201–202****Twofish, 336****U****UDP (User Datagram Protocol)**

- flooding, 156
- hijacking, 169

**UMTS (Universal Mobile Telecommunications System), 234, 261–262****users, enumeration, 49****V****V2X (vehicle to anything), 287****VBScript, 113****viruses, 109. See also malware**

- creating, 111–113
- Mirai, 298
- types of, 109–110

**VM (virtual machine), 315****volumetric attacks, 155**

- ICMP flood, 156
- ping of death, 156
- Smurf, 155
- UDP flood, 156

**VPNs (virtual private networks), 189**

- IPsec, 190–191
- L2TP (Layer 2 Tunneling Protocol), 190
- PPTP (Point-to-Point Tunneling Protocol), 190

**vulnerability(ies)**

- assessment, 62
- cloud computing, 329
- IoT (Internet of Things), 297
- OWASP top 10, 225–226, 300–302
- scanners, 58
  - Nessus, 60–61
  - Nexpose, 61
  - SAINT, 61
- scoring, 59
  - CVE, 59–60
  - CVSS, 59
- web application, 221
- web server, 208–209

**W****WAFs, 202****WannaCry, 100–101****Wayback Machine, 10–11****web applications, 214**

- APIs (application programming interfaces), 224
- attacks
  - command injection, 224
  - cookie poisoning, 223

- CSRF (cross-site request forgery), 221–222
- forceful browsing, 222
- LDAP injection, 223
- parameter tampering, 222
- SQL injection, 216–220
- webhooks, 224–225
- XSS (cross-site scripting), 220–221
- HTTP
  - commands, 215
  - messages, 216
- RFI (remote file inclusion), 221
- web pages, session hijacking, 90**
- web servers, 206**
  - Apache, 207
  - architecture, 207–208
  - attacks, 211
    - directory traversal, 210
    - DNS server hijacking, 209–210
    - DoS, 209
    - encoding schemes and, 210
    - HTTP response splitting, 210–211
    - password cracking, 211
    - web cache poisoning, 211
  - banner grabbing, 227–228
  - securing, 211–212
  - vulnerabilities, 208–209
  - web shell, 211
- web session hijacking, 167–169**
- webhooks, 224–225**
- websites, 8–11. See also tools**
  - archive.org, 10–11
  - censys.io, 10
  - default credentials, 228–229
  - email tracking, 13
  - footprinting, 227
    - Netcat, 227
    - Netcraft, 227
    - netcraft.com, 8
  - OSINT (open-source intelligence), 14–17
  - PhishTank.com, 131
  - regional internet registries, 15
  - session hijacking and, 171
  - shodan.io, 9–10
  - website monitoring, 12
- white box testing, 19**
- white hat hacker, 19**
- Whois, 15**
  - regional internet registries and, 15
  - searches, 14–15
- Wi-Fi**
  - attacks, 246
    - ARP poisoning, 251
    - key reinstallation, 248–249
    - MAC spoofing, 248
    - rogue access, 247–248
  - authentication, 239–241
  - geo mapping, 250
  - hotpots, creating, 255–257
  - IoT and, 287
  - open access points, 276
  - protocols, 239
  - scanning tools, 246–247
- Windows**
  - hashes, 67
  - hotspot, turning a laptop into a, 255–256
  - nbtstat scans, 47
  - NTFS, ADS (Alternate Data Stream), 75
  - rootkits, 77–78
  - SAM (Security Accounts Manager), 342–343
  - Sysinternals tool suite, 120
  - tskill command, 113
  - web servers, 207
- Winrtgen, 69**
- wire sniffing, 69**

**wireless technology**

- antennas, 241–242
- attacks, 246, 249
- Bluetooth, 243
  - attacks, 252–254
  - tools, 254
- BSSID (basic service set identifier), 235
- DSSS (Direct-Sequence Spread Spectrum), 235, 260
- FHSS (Frequency-Hopping Spread Spectrum), 235, 260
- IEEE 802.11 standard, 235
  - 802.11a, 236
  - 802.11ax, 237–238
  - 802.11b, 236
  - 802.11g, 237
  - 802.11n, 237
  - 802.11n 2009, 237
  - channels, 238
- ISM (Industrial, Scientific, and Medical) band, 235
- MIMO-OFDM (Multiple Input/Multiple Output Orthogonal Frequency-Division Multiplexing), 235
- OFDM (Orthogonal Frequency-Division Multiplexing), 235

- securing, 252
- SSID (service set identifier), 235
- THSS (Time-Hopping Spread Spectrum), 260
- Zigbee, 243

**Wireshark, 54–55****WMI (Windows Management Interface), fileless malware, 102****worms, 112****wrappers, Trojan horse, 98–99****X**

---

**X.509, 351–352****XOIC, 161****XSS (cross-site scripting), 130, 167–168, 220–221, 326****Y-Z**

---

**Yagi antenna, 242****zANTI, 280–281****Zenmap, 27****Zephyr, 291****Zigbee, 243, 287–288****Zimperium zIPS, 265****zone transfers, 49–50****Z-Wave, 289**